



SPEEDWAYS
TYRES

...Keeps You Moving



...Keeps You Moving

GLOBAL
PRESENCE
IN OVER



COUNTRIES WORLDWIDE

Profile

SPEEDWAYS TYRES is a part of the well-known 'Speedways Group' of companies in India. Established in 1984, our presence today spans over 100 countries worldwide. We are leading manufacturer of Farm Radial, Agriculture Industrial, OTR, Truck & Light Truck Tyres, Two / Three Wheeler Tyres, ATV, Tubes & Flaps.

SPEEDWAYS TYRES Located in the industrial town of Jalandhar, Punjab is having state-of-the-art manufacturing facility. The Tyres manufactured in this facility are supplied to major original equipment manufacturers (OEM's) in Asia, North & South America, Europe & Africa.

We have been awarded the "CAPEXIL Export Award" for a record eighth year in succession in recognition of our outstanding performance in exports. Built on the foundation of honesty, trust, lawful operation and scientific development, we strive to deliver maximum value to our customers & stakeholders. Over the years, we have established a distinct culture in the company through various HR policies. With an emphasis on TQM, continuous efforts are being undertaken at our R&D centre to improve product quality, manufacturing & production systems. Our target has always been to delight our customers with the best products and services.

TEAM

We are young, dynamic and motivated professionals who are passionate and committed to achieve better results for our customers. We employ a customized engagement process to understand and meet the customer's requirement. Our team members interact at all levels to forge a strong relationship to sustain the success achieved.

SKILL & EXPERIENCE

Our team at **SPEEDWAYS TYRES** specializes in handling & solving complex problems that includes long term strategic planning, business process design and setting up a control framework. We are proud to have a legacy of succeeding in adverse and testing business conditions.

KEY GROWTH DRIVERS

- Technology
- Cost of Production & Manufacturing efficiency
- Receptive to customer feedback

WHAT WE BELIEVE IN

- Customer Centric Approach
- Service, Quality & Customer Satisfaction
- Process excellence
- Relationship with all stakeholders
- Application development
- On-time delivery

Our endeavour is to work aggressively, challenge traditional mind-set so as to provoke our team to be innovate in their thoughts, actions & delivery.

COLLABORATIVE STRATEGY

- Synergy with the customer at:
 - Product level
 - Market level
 - Organizational level



Index

AGRICULTURE



Radial Tractor Tyres - 65 Series	01
Steel Belted Radial Tractor Tyres - 65 Series	02
Radial Tractor Tyres - 70 & 75 Series	03
Steel Belted Radial Tractor Tyres - 70 & 75 Series	05
Radial Tractor Tyres - 80 & 85 Series	07
Steel Belted Radial Tractor Tyres - 80 & 85 Series	09
Radial Row Crop Tyres - 90 & 95 Series	11
Steel Belted Radial Row Crop Tyres - 90 & 95 Series	12
Radial Harvester Tyres	13
Steel Belted Radial Harvester Tyres	13
Radial Flotation Tyres	15
Steel Belted Radial Flotation Tyres	16
Bias Tractor Rear Tyres	17
Harvester Tyres	22
Irrigation Tyres	23
Flotation Implement Tyres	26
Drive Wheel Tyres	27
Bias Tractor Front Tyres	28
Bias Row Crop Tyres	32
All Terrain Traction Tyres	34
Farm & Highway Service Implement Tyres	36
Agricultural Implement Tyres	37
Radial Implement Tyres	40
Forestry Tyres	43
Golf Cart Tyres	46
Lawn & Garden Tyres	48
Sports Ground & Mountain Tyres	49

Index

INDUSTRIAL / OTR



Radial Industrial Tyres	51
Steel Belted Radial Industrial Tyres	51
Earthmover & Port Tyres	55
Grader Tyres	57
Radial Skid Steer Tyres	58
Steel Belted Radial Skid Steer Tyres	58
Skid Steer Tyres	59
Drive Wheel (R-3) Tyres	62
Excavator Tyres	62
Industrial Backhoe Loader Tyres	63
Multi Purpose Truck (MPT) Tyres	67
Compactor Tyres	69
Industrial Forklift Tyres	69
Industrial Solid Tyres	71

Index

LIGHT TRUCK / TRUCK & TRAILER TYRES	73
VINTAGE VEHICLE TYRES	84
MILITARY JEEP 4X4 TYRES	85
TWO WHEELER TYRES	88
THREE WHEELER TYRES	92
ATV TYRES	93
BUTYL TUBES	95
FLAPS	100
CERTIFICATIONS	101



AGRICULTURE
TYRES

RADIAL TRACTOR TYRES (R-1W)

65 SERIES

- Radial tyre with balanced characteristics for wide range of applications both on the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
440/65R-24 135 D/138 A8	SR-666	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	47	59	2360	5195	2180	4800	2.4	35	135	D/65kmph	D/40 mph
540/65R-24 146 D/149 A8		W 16L	W 18L		531	20.9	1313	51.7	589	23.2	3929	154.7	50	63	3250	7150	3000	6600	2.4	35	146		
440/65R-28 138 D/141 A8		W 14L	W 13 W 15L		442	17.4	1283	50.5	589	23.2	3879	152.7	47	59	2575	5665	2360	5195	2.4	35	138		
480/65R-28 142 D/145 A8	SR-666	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	48	60	2900	6380	2650	5830	2.4	35	142	D/65kmph	D/40 mph
540/65R-28 149 D/152 A8		W 16L	W 18L		540	21.2	1413	55.6	643	25.3	4253	167.5	50	62	3550	7810	3250	7150	2.4	35	149		
540/65R-38 153 D/156 A8		W 16L	W 18L		531	20.9	1667	65.6	760	29.9	5059	199.2	51	63	4010	8820	3660	8050	2.4	35	153		
600/65R-38 159 D/162 A8	SR-666	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	56	70	4750	10450	4375	9625	2.4	35	159	D/65kmph	D/40 mph
650/65R-38 163 D/166 A8		DW 20B	W 9		643	25.3	1808	71.2	830	32.7	5479	215.7	60	75	5600	12320	4875	10725	2.4	35	163		
650/65R-42 165 D/168 A8		DW 20B	DW 21B DW 23B		645	25.7	1913	75.0	878	35.0	5810	229.0	74	93	5600	12320	5150	11330	2.4	35	165		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

STEEL BELTED RADIAL TRACTOR TYRES (R-1W)

65 SERIES

- Enhance strength and stability.
- Resistant to punctures and cuts.
- Distribute the load evenly across the tyres footprint.
- Self cleaning tread design.
- Combination of tread design and special compound, reduces fuel consumption and improves efficiency without sacrificing traction or performance.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
440/65R-24 135 D/138 A8	SR-666	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	47	59	2360	5195	2180	4800	2.4	35	135	D/65kmph	D/40 mph
540/65R-24 146 D/149 A8		W 16L	W 18L		531	20.9	1313	51.7	589	23.2	3929	154.7	50	63	3250	7150	3000	6600	2.4	35	146		
440/65R-28 138 D/141 A8		W 14L	W 13 W 15L		442	17.4	1283	50.5	589	23.2	3879	152.7	47	59	2575	5665	2360	5195	2.4	35	138		
480/65R-28 142 D/145 A8	SR-666	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	48	60	2900	6380	2650	5830	2.4	35	142	D/65kmph	D/40 mph
540/65R-28 149 D/152 A8		W 16L	W 18L		540	21.2	1413	55.6	643	25.3	4253	167.5	50	62	3550	7810	3250	7150	2.4	35	149		
540/65R-38 153 D/156 A8		W 16L	W 18L		531	20.9	1667	65.6	760	29.9	5059	199.2	51	63	4010	8820	3660	8050	2.4	35	153		
600/65R-38 159 D/162 A8	SR-666	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	56	70	4750	10450	4375	9625	2.4	35	159	D/65kmph	D/40 mph
650/65R-38 163 D/166 A8		DW 20B	W 9		643	25.3	1808	71.2	830	32.7	5479	215.7	60	75	5600	12320	4875	10725	2.4	35	163		
650/65R-42 165 D/168 A8		DW 20B	DW 21B DW 23B		645	25.7	1913	75.0	878	35.0	5810	229.0	74	93	5600	12320	5150	11330	2.4	35	165		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

RADIAL TRACTOR TYRES (R-1W)

70/75 SERIES

- Radial tyre with balanced characteristics for wide range of applications both on the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
200/70R-16 94 A8/B	SR-777	W 6	-	TL	198	7.8	686	27.0	312	12.3	2057	81.0	28	35	670	1475	670	1475	2.4	35	94	B/50 kmph	B/30 mph
240/70R-16 104 A8/B		W 8	W 8L W 9L		241	9.5	742	29.2	335	13.2	2225	87.6	31	38	900	1980	900	1980	2.4	35	104		
260/70R-16 109 A8/B		W 8	W 8L W 9L		259	10.2	770	30.3	345	13.6	2309	90.9	32	39	1030	2265	1030	2265	2.4	35	109		
280/70R-16 112 A8/B	SR-777	W 9	W 8 W 8L W 10	TL	282	11.1	798	31.4	356	14.0	2370	93.3	33	41	1120	2465	1120	2465	2.4	35	112	B/50 kmph	B/30 mph
280/70R-18 114 A8/B		W 9	W 8 W 10		282	11.1	849	33.4	381	15.0	2547	100.3	33	41	1180	2595	1180	2595	2.4	35	114		
280/70R-20 116 A8/B		W 9	W 8 W 10		282	11.1	900	35.4	408	16.1	2705	106.5	33	41	1250	2750	1250	2750	2.4	35	116		
300/70R-20 120 A8/B	SR-777	W 9	W 10	TL	295	11.6	952	37.5	428	16.8	2854	112.4	33	41	1400	3080	1400	3080	2.4	35	120	B/50 kmph	B/30 mph
320/70R-20 123 A8/B		W 10	W 9 W 11		320	12.6	983	38.7	444	17.5	2964	116.7	34	43	1550	3410	1550	3410	2.4	35	123		
360/70R-20 129 A8/B		W 11	W 10 W 12		358	14.1	1041	41.0	470	18.5	3122	122.9	42	53	1850	4070	1850	4070	2.4	35	129		
380/70R-20 132 A8/B	SR-777	W 12	W 11 W 13	TL	380	15.0	1082	42.6	482	19.0	3215	126.6	42	53	2000	4400	2000	4400	2.4	35	132	B/50 kmph	B/30 mph
320/70R-24 116A8/B		W 10	W 9 W 11		320	12.6	1095	43.1	503	19.8	3240	127.8	41	51	1250	2750	1250	2750	1.6	23	116		
360/70R-24 122 A8/B		W 11	W 10 W 11		358	14.1	1153	45.4	518	20.4	3454	136.0	42	53	1500	3300	1500	3300	1.6	23	122		
380/70R-24 125 A8/B	SR-777	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	43	54	1650	3630	1650	3630	1.6	23	125	B/50 kmph	B/30 mph
420/70R-24 130 A8/B		W 13	W 12 W 14L		419	16.5	1222	48.1	579	22.8	3561	144.9	45	56	1900	4180	1900	4180	1.6	23	130		
380/70R-28 127 A8/B		W 12	W 11 W 13		381	15.0	1293	50.9	587	23.1	3884	152.9	43	54	1750	3850	1750	3850	1.6	23	127		
420/70R-28 133 A8/B	SR-777	W 13	W 12 W 14	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	47	59	2060	4540	2060	4535	1.6	23	133	B/50 kmph	B/30 mph
480/70R-28 139 A8/B		W 13	W 15L		480	18.9	1420	55.9	634	25.0	4885	192.3	48	60	2500	5500	2500	5500	2.4	35	139		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph		50 kmph / 30 mph		bar	psi		kg	lbs	kmph	mph
															MAX LOAD	MAX LOAD	MAX LOAD	MAX LOAD							
420/70R-30 134 D/137 A8	SR-77	W 13	W 13 W 15L	TL	418	16.0	1398	55.0	631	25.0	4172	170.0	56	70	2120	4664	2120	4664	1.6	23	134	D/65 kmph	D/40 mph		
480/70R-30 152 A8/B		W 15L	W 14L W 16L		479	19.0	1478	58.2	659	26.0	4372	172.0	48	60	2965	6523	2965	6523	1.6	23	152				
600/70R-30 152 A8/B	SR-77	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	59	74	3550	7810	3550	7810	1.6	23	152	D/65 kmph	D/40 mph		
480/70R-34 155 D/158 A8		W 15L	W 13 W 15L		479	19.0	1580	62.0	728	30.0	4788	195.0	50	62	1515	3333	1515	3333	1.6	23	155				
400/75R-38 15.5R-38 138 A8/B	SR-777	W 14	W 14	TL	394	15.5	1570	62.0	730	29.0	4685	184.0	47	59	2360	5192	2360	5192	1.6	23	138	B/50 kmph	B/30 mph		
480/70R-38 145 D/148A8	SR-77	W 15L	W 18L		479	19.0	1681	66.0	764	31.0	5050	206.0	51	64	1595	3509	1595	3509	1.6	23	145	D/65 kmph	D/40 mph		
520/70R-38 150 D/153A8		W 16L	W 18L		516	20.0	1749	69.0	793	32.0	5300	216.0	54	68	1845	4059	1845	4059	1.6	23	150				
580/70R-38 155 D/158 A8		W 18L	W 18L		577	23.0	1827	72.0	821	34.0	5471	223.0	58	73	2135	4697	2135	4697	1.6	23	155				
710/70R-38 175 D/178 A8	SR-777	DW 24	-	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	52	65	7500	16500	7500	16500	1.6	23	175	D/65 kmph	D/40 mph		
580/70R-42 158 D/161 A8	SR-77	W 18L	DW18L		584	23.0	1908	75.0	864	34.0	5690	224.0	58	73	4250	9350	4250	9350	1.6	23	158				
710/70R-42 176 D/179 A8	SR-777	DW 24	-		716	28.2	2060	81.1	922	36.3	6175	243.1	60	75	7750	17050	7750	17050	1.6	23	176				

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

STEEL BELTED RADIAL TRACTOR TYRES (R-1W)

70/75 SERIES

- Enhance strength and stability.
- Resistant to punctures and cuts.
- Distribute the load evenly across the tyres footprint.
- Self cleaning tread design.
- Combination of tread design and special compound, reduces fuel consumption and improves efficiency without sacrificing traction or performance.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
200/70R-16 94 A8/B	SR-777	W 6	-	TL	198	7.8	686	27.0	312	12.3	2057	81.0	28	35	670	1475	670	1475	2.4	35	94	B/50 kmph	B/30 mph
240/70R-16 104 A8/B		W 8	W 8L W 9L		241	9.5	742	29.2	335	13.2	2225	87.6	31	38	900	1980	900	1980	2.4	35	104		
260/70R-16 109 A8/B		W 8	W 8L W 9L		259	10.2	770	30.3	345	13.6	2309	90.9	32	39	1030	2265	1030	2265	2.4	35	109		
280/70R-16 112 A8/B	SR-777	W 9	W 8 W 8L W 10	TL	282	11.1	798	31.4	356	14.0	2370	93.3	33	41	1120	2465	1120	2465	2.4	35	112	B/50 kmph	B/30 mph
280/70R-18 114 A8/B		W 9	W 8 W 10		282	11.1	849	33.4	381	15.0	2547	100.3	33	41	1180	2595	1180	2595	2.4	35	114		
280/70R-20 116 A8/B		W 9	W 8 W 10		282	11.1	900	35.4	408	16.1	2705	106.5	33	41	1250	2750	1250	2750	2.4	35	116		
300/70R-20 120 A8/B	SR-777	W 9	W 10	TL	295	11.6	952	37.5	428	16.8	2854	112.4	33	41	1400	3080	1400	3080	2.4	35	120	B/50 kmph	B/30 mph
320/70R-20 123 A8/B		W 10	W 9 W 11		320	12.6	983	38.7	444	17.5	2964	116.7	34	43	1550	3410	1550	3410	2.4	35	123		
360/70R-20 129 A8/B		W 11	W 10 W 12		358	14.1	1041	41.0	470	18.5	3122	122.9	42	53	1850	4070	1850	4070	2.4	35	129		
380/70R-20 132 A8/B	SR-777	W 12	W 11 W 13	TL	380	15.0	1082	42.6	482	19.0	3215	126.6	42	53	2000	4400	2000	4400	2.4	35	132	B/50 kmph	B/30 mph
320/70R-24 116A8/B		W 10	W 9 W 11		320	12.6	1095	43.1	503	19.8	3240	127.8	41	51	1250	2750	1250	2750	1.6	23	116		
360/70R-24 122 A8/B		W 11	W 10 W 11		358	14.1	1153	45.4	518	20.4	3454	136.0	42	53	1500	3300	1500	3300	1.6	23	122		
380/70R-24 125 A8/B	SR-777	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	43	54	1650	3630	1650	3630	1.6	23	125	B/50 kmph	B/30 mph
420/70R-24 130 A8/B		W 13	W 12 W 14L		419	16.5	1222	48.1	579	22.8	3561	144.9	45	56	1900	4180	1900	4180	1.6	23	130		
380/70R-28 127 A8/B		W 12	W 11 W 13		381	15.0	1293	50.9	587	23.1	3884	152.9	43	54	1750	3850	1750	3850	1.6	23	127		
420/70R-28 133 A8/B	SR-777	W 13	W 12 W 14	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	47	59	2060	4540	2060	4535	1.6	23	133	B/50 kmph	B/30 mph
480/70R-28 139 A8/B		W 13	W 15L		480	18.9	1420	55.9	634	25.0	4885	192.3	48	60	2500	5500	2500	5500	2.4	35	139		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph		50 kmph / 30 mph		bar	psi		kg	lbs	kmph	mph
															MAX LOAD	MAX LOAD	MAX LOAD	MAX LOAD							
420/70R-30 134 D/137 A8	SR-77	W 13	W 13 W 15L	TL	418	16.0	1398	55.0	631	25.0	4172	170.0	56	70	2120	4664	2120	4664	1.6	23	134	D/65 kmph	D/40 mph		
480/70R-30 152 A8/B		W 15L	W 14L W 16L		479	19.0	1478	58.2	659	26.0	4372	172.0	48	60	2965	6523	2965	6523	1.6	23	152				
600/70R-30 152 A8/B	SR-77	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	59	74	3550	7810	3550	7810	1.6	23	152	D/65 kmph	D/40 mph		
480/70R-34 155 D/158 A8		W 15L	W 13 W 15L		479	19.0	1580	62.0	728	30.0	4788	195.0	50	62	1515	3333	1515	3333	1.6	23	155				
400/75R-38 15.5R-38 138 A8/B	SR-777	W 14	W 14	TL	394	15.5	1570	62.0	730	29.0	4685	184.0	47	59	2360	5192	2360	5192	1.6	23	138	B/50 kmph	B/30 mph		
480/70R-38 145 D/148A8	SR-77	W 15L	W 18L		479	19.0	1681	66.0	764	31.0	5050	206.0	51	64	1595	3509	1595	3509	1.6	23	145	D/65 kmph	D/40 mph		
520/70R-38 150 D/153A8		W 16L	W 18L		516	20.0	1749	69.0	793	32.0	5300	216.0	54	68	1845	4059	1845	4059	1.6	23	150				
580/70R-38 155 D/158 A8		W 18L	W 18L		577	23.0	1827	72.0	821	34.0	5471	223.0	58	73	2135	4697	2135	4697	1.6	23	155				
710/70R-38 175 D/178 A8	SR-777	DW 24	-	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	52	65	7500	16500	7500	16500	1.6	23	175	D/65 kmph	D/40 mph		
580/70R-42 158 D/161 A8	SR-77	W 18L	DW18L		584	23.0	1908	75.0	864	34.0	5690	224.0	58	73	4250	9350	4250	9350	1.6	23	158				
710/70R-42 176 D/179 A8	SR-777	DW 24	-		716	28.2	2060	81.1	922	36.3	6175	243.1	60	75	7750	17050	7750	17050	1.6	23	176				

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

RADIAL TRACTOR TYRES (R-1W)

80/85 SERIES

- Radial tyre with balanced characteristics for wide range of applications both on the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
250/85R-20 9.5R-20 116 A8/B	SR-888	W 8	W 7 W 9	TL	249	9.8	940	37.0	424	16.7	2812	110.7	38	48	1250	2750	1250	2750	2.4	35	116	B/50 kmph	B/30 mph
280/85R-20 11.2R-20 112 A8/B		W 10	W 9		292	11.5	983	38.7	442	17.4	2951	116.2	39	49	1120	2464	1120	2464	1.6	23	112		
250/85R-24 9.5R-24 109 A8/B		W 8	W 7 W 9		251	9.9	1036	40.8	475	18.7	3104	122.2	42	53	1030	2465	1030	2465	1.6	23	109		
280/85R-24 11.2R-24 115 A8/B	SR-888	W 10	W 9	TL	292	11.5	1087	42.8	508	20.0	3226	127.0	41	51	1215	2675	1215	2675	1.6	23	115	B/50 kmph	B/30 mph
320/85R-24 12.4R-24 122 A8/B		W 11	W 9 W 10		330	13.0	1153	45.4	518	20.4	3424	134.8	43	54	1500	3300	1500	3300	1.6	23	122		
340/85R-24 13.6R-24 125 A8/B		W 12	W 11		343	13.5	1188	46.8	533	21.0	3531	139.0	44	55	1650	3630	1650	3630	1.6	23	125		
380/85R-24 14.9R-24 131 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	45	56	1950	4290	1950	4290	1.6	23	131	B/50 kmph	B/30 mph
250/85R-28 9.5R-28 112 A8/B		W 8	W 7 W 9		251	9.9	1138	44.8	518	20.4	3321	134.7	38	48	1120	2465	1120	2465	1.6	23	112		
280/85R-28 11.2R-28 118 A8/B		W 10	W 9		292	11.5	1186	46.7	546	21.5	3559	140.1	42	53	1320	2904	1320	2904	1.6	23	118		
320/85R-28 12.4R-28 124 A8/B	SR-888	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	42	53	1600	3520	1600	3520	1.6	23	124	B/50 kmph	B/30 mph
340/85R-28 13.6R-28 127 A8/B		W 12	W 11		353	13.9	1288	50.7	584	23.0	3835	151.0	42	53	1750	3850	1750	3850	1.6	23	127		
380/85R-28 14.9R-28 133 A8/B		W 12	W 11 W 13		381	15.0	1356	53.4	607	23.9	4016	158.1	45	56	2060	4535	2060	4535	1.6	23	133		
420/85R-28 16.9R-28 139 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	49	61	2430	5345	2430	5345	1.6	23	139	B/50 kmph	B/30 mph
380/85R-30 14.9R-30 135 A8/B		W 12	W 11 W 13		381	15.0	1407	55.4	630	24.8	4153	163.5	45	56	2180	4795	2180	4795	1.6	23	135		
420/85R-30 16.9R-30 140 A8/B		W 15	W 13 W 14		419	16.5	1476	58.1	660	26.0	4394	173.0	45	56	2500	5500	2500	5500	1.6	23	140		
460/85R-30 18.4R-30 145 A8/B	SR-888	W 16 L	W 14L W 15L	TL	475	18.7	1544	60.8	683	26.9	4536	178.6	54	67	2900	6380	2900	6380	1.6	23	145	B/50 kmph	B/30 mph
380/85R-34 14.9R-34 137 A8 /B		W 12	W 11 W 13		381	15.0	1514	59.6	686	27.0	4470	176.0	45	56	2300	5060	2300	5060	1.6	23	137		
420/85R-34 16.9R-34 142 A8/B		W 15	W 13 W 14		419	16.5	1577	62.1	711	28.0	4674	184.0	49	61	2650	5830	2650	5830	1.6	23	142		
460/85R-34 18.4R-34 147 A8/B		W 16	W 14 W 15		475	18.7	1646	64.8	737	29.0	4851	191.0	50	63	3075	6765	3075	6765	1.6	23	147		

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
340/85R-38 13.6R-38 133 A8/B	SR-888	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	52	65	2060	4532	2060	4532	1.6	23	133	B/50 Kmph	B/30 mph
420/85R-38 16.9R-38 144 A8/B		W 15	W 13 W 14		419	16.5	1679	66.1	762	30.0	5004	197.0	52	65	2800	6160	2800	6160	1.6	23	144		
460/85R-38 18.4R-38 149 A8/B		W 16	W 14 W 15		455	17.9	1748	68.8	787	31.0	5156	203.0	55	69	3250	7150	3250	7150	1.6	23	149		
520/85R-38 20.8R-38 155 A8/B	SR-888	DW 18	DW 16L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	59	74	3875	8525	3875	8525	1.6	23	155	B/50 Kmph	B/30 mph
480/80R-42 18.4R-42 151 A8/B		W 16	DW 16		480	18.9	1836	72.3	838	33.0	5461	215.0	54	68	3450	7590	3450	7590	1.6	23	151		
520/85R-42 20.8R-42 157 A8/B		DW 18L	DW 16		516	20.3	1951	76.8	859	33.8	5735	225.8	58	73	4125	9075	4125	9075	1.6	23	157		
650/85R-42	SR-888	UNDER DEVELOPMENT																					
480/80R-46 18.4R-46 158 A8/B	SR-888	W 16	DW 16	TL	480	18.9	1933	76.1	889	35.0	5791	228.0	52	65	4250	9350	4250	9350	2.4	35	158	B/50 Kmph	B/30 mph
340/85R-48 13.6R-48 152 A8/B		W 12	W 11		353	13.9	1798	70.8	838	33.0	5385	212.0	44	55	3550	7810	3550	7810	4.0	58	152		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

STEEL BELTED RADIAL TRACTOR TYRES (R-1W)

80/85 SERIES

- Enhance strength and stability.
- Resistant to punctures and cuts.
- Distribute the load evenly across the tyres footprint.
- Self cleaning tread design.
- Combination of tread design and special compound, reduces fuel consumption and improves efficiency without sacrificing traction or performance.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD	LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	kg	lbs	kg	lbs		bar	psi	kmph	mph
		↓																						
250/85R-20 9.5R-20 116 A8/B	SR-888	W 8	W 7 W 9	TL	249	9.8	940	37.0	424	16.7	2812	110.7	38	48	1250	2750	1250	2750	2.4	35	116	B/50 kmph	B/30 mph	
280/85R-20 11.2R-20 112 A8/B		W 10	W 9		292	11.5	983	38.7	442	17.4	2951	116.2	39	49	1120	2464	1120	2464	1.6	23	112			
250/85R-24 9.5R-24 109 A8/B		W 8	W 7 W 9		251	9.9	1036	40.8	475	18.7	3104	122.2	42	53	1030	2465	1030	2465	1.6	23	109			
280/85R-24 11.2R-24 115 A8/B	SR-888	W 10	W 9	TL	292	11.5	1087	42.8	508	20.0	3226	127.0	41	51	1215	2675	1215	2675	1.6	23	115	B/50 kmph	B/30 mph	
320/85R-24 12.4R-24 122 A8/B		W 11	W 9 W 10		330	13.0	1153	45.4	518	20.4	3424	134.8	43	54	1500	3300	1500	3300	1.6	23	122			
340/85R-24 13.6R-24 125 A8/B		W 12	W 11		343	13.5	1188	46.8	533	21.0	3531	139.0	44	55	1650	3630	1650	3630	1.6	23	125			
380/85R-24 14.9R-24 131 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	45	56	1950	4290	1950	4290	1.6	23	131	B/50 kmph	B/30 mph	
250/85R-28 9.5R-28 112 A8/B		W 8	W 7 W 9		251	9.9	1138	44.8	518	20.4	3321	134.7	38	48	1120	2465	1120	2465	1.6	23	112			
280/85R-28 11.2R-28 118 A8/B		W 10	W 9		292	11.5	1186	46.7	546	21.5	3559	140.1	42	53	1320	2904	1320	2904	1.6	23	118			
320/85R-28 12.4R-28 124 A8/B	SR-888	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	42	53	1600	3520	1600	3520	1.6	23	124	B/50 kmph	B/30 mph	
340/85R-28 13.6R-28 127 A8/B		W 12	W 11		353	13.9	1288	50.7	584	23.0	3835	151.0	42	53	1750	3850	1750	3850	1.6	23	127			
380/85R-28 14.9R-28 133 A8/B		W 12	W 11 W 13		381	15.0	1356	53.4	607	23.9	4016	158.1	45	56	2060	4535	2060	4535	1.6	23	133			
420/85R-28 16.9R-28 139 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	49	61	2430	5345	2430	5345	1.6	23	139	B/50 kmph	B/30 mph	
380/85R-30 14.9R-30 135 A8/B		W 12	W 11 W 13		381	15.0	1407	55.4	630	24.8	4153	163.5	45	56	2180	4795	2180	4795	1.6	23	135			
420/85R-30 16.9R-30 140 A8/B		W 15	W 13 W 14		419	16.5	1476	58.1	660	26.0	4394	173.0	45	56	2500	5500	2500	5500	1.6	23	140			
460/85R-30 18.4R-30 145 A8/B	SR-888	W 16 L	W 14 L W 15 L	TL	475	18.7	1544	60.8	683	26.9	4536	178.6	54	67	2900	6380	2900	6380	1.6	23	145	B/50 kmph	B/30 mph	
380/85R-34 14.9R-34 137 A8 /B		W 12	W 11 W 13		381	15.0	1514	59.6	686	27.0	4470	176.0	45	56	2300	5060	2300	5060	1.6	23	137			
420/85R-34 16.9R-34 142 A8/B		W 15	W 13 W 14		419	16.5	1577	62.1	711	28.0	4674	184.0	49	61	2650	5830	2650	5830	1.6	23	142			
460/85R-34 18.4R-34 147 A8/B		W 16	W 14 W 15		475	18.7	1646	64.8	737	29.0	4851	191.0	50	63	3075	6765	3075	6765	1.6	23	147			

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD	LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	kg	lbs	kg	lbs		bar	psi	kmph	mph
					40 kmph / 25 mph	50 kmph / 30 mph																		
340/85R-38 13.6R-38 133 A8/B	SR-888	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	52	65	2060	4532	2060	4532	1.6	23	133	B/50 Kmph	B/30 mph	
420/85R-38 16.9R-38 144 A8/B		W 15	W 13 W 14		419	16.5	1679	66.1	762	30.0	5004	197.0	52	65	2800	6160	2800	6160	1.6	23	144			
460/85R-38 18.4R-38 149 A8/B		W 16	W 14 W 15		455	17.9	1748	68.8	787	31.0	5156	203.0	55	69	3250	7150	3250	7150	1.6	23	149			
520/85R-38 20.8R-38 155 A8/B	SR-888	DW 18	DW 16L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	59	74	3875	8525	3875	8525	1.6	23	155	B/50 Kmph	B/30 mph	
480/80R-42 18.4R-42 151 A8/B		W 16	DW 16		480	18.9	1836	72.3	838	33.0	5461	215.0	54	68	3450	7590	3450	7590	1.6	23	151			
520/85R-42 20.8R-42 157 A8/B		DW 18L	DW 16		516	20.3	1951	76.8	859	33.8	5735	225.8	58	73	4125	9075	4125	9075	1.6	23	157			
650/85R-42	SR-888	UNDER DEVELOPMENT																						
480/80R-46 18.4R-46 158 A8/B	SR-888	W 16	DW 16	TL	480	18.9	1933	76.1	889	35.0	5791	228.0	52	65	4250	9350	4250	9350	2.4	35	158	B/50 Kmph	B/30 mph	
340/85R-48 13.6R-48 152 A8/B		W 12	W 11		353	13.9	1798	70.8	838	33.0	5385	212.0	44	55	3550	7810	3550	7810	4.0	58	152			

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

RADIAL ROW CROP TYRES (R-1W)

90/95 SERIES

- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
210/95R-16 7.50R-16 106 A8/B	RC-999	W 6.5	W 6 W 7	TL	208	8.2	805	31.7	361	14.2	2416	95.1	28	35	950	2090	950	2090	2.4	35	106	B/50 kmph	B/30 mph
210/95R-18 7.50R-18 108 A8/B		W 7	W 6		214	8.4	856	33.7	386	15.2	2565	101.0	28	35	1000	2200	1000	2200	2.4	35	108		
210/90R-20 8.3R-20 110 A8/B		W 7	W 6		211	8.3	889	35.0	411	16.2	2682	105.6	35	44	1060	2332	1060	2332	2.4	35	110		
210/95R-20 7.5R-20 110 A8/B	RC-999	W 7	W 6	TL	214	8.4	907	35.7	419	16.5	2748	108.2	28	35	1060	2332	1060	2332	2.4	35	110	B/50 kmph	B/30 mph
210/95R-32 8.3R-32 120 A8/B		W 8	W 7		214	8.4	1213	47.8	559	22.0	3658	144.0	31	39	1400	3080	1400	3080	2.4	35	120		
230/95R-32 9.5R-32 128 A8/B		W 8	W 7		229	9.0	1251	49.3	584	23.0	3759	148.0	31	39	1800	3960	1800	3960	4.0	58	128		
270/95R-32 11.2R-32 136 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1327	52.2	609	24.0	4039	159.0	32	40	2240	4928	2240	4928	4.0	58	136	B/50 kmph	B/30 mph
230/95R-36 9.5R-36 130 A8/B		W 8	W 7		229	9.0	1352	53.2	609	24.0	4064	160.0	43	54	1900	4180	1900	4180	4.0	58	130		
270/95R-36 11.2R-36 139 A8/B		W 9	W 8		229	9.0	1425	56.1	663	26.1	4359	171.6	36	45	2430	5346	2430	5346	4.0	58	139		
270/95R-38 11.2R-38 140 A8/B	RC-999	W 8	W 9 W 10	TL	264	10.3	1479	58.2	686	27.0	4445	175.0	36	45	2500	5500	2500	5500	4.0	58	140	B/50 kmph	B/30 mph
230/95R-44 9.5 R-44 134 A8/B		W 8	W 7		228	9.0	1556	61.3	737	29.0	4699	185.0	33	41	2120	4664	2120	4664	4.0	58	134		
270/95R-44 11.2R-44 142 A8/B		W 8	W 9 W 10		275	10.8	1632	64.3	762	30.0	4902	193.0	33	41	2650	5830	2650	5830	4.0	58	142		
300/95R-46 12.4R-46 148 A8/B	RC-999	W 9	W 8 W 10	TL	305	12.0	1737	68.3	813	32.0	5207	205.0	46	58	3150	6930	3150	6930	4.0	58	148	B/50 kmph	B/30 mph
380/90R-46 14.9R-46 148 A8/B		W 12	W 11 W 13		380	15.0	1852	72.9	866	34.1	5648	222.4	46	58	3295	7249	3295	7249	2.4	35	155		
230/95R-48 9.5R-48 136 A8/B		W 8	W 7		228	9.0	1657	65.2	787	30.1	4978	196.0	33	41	2240	4928	2240	4928	4.0	58	136		
270/95R-48 11.2R-48 144 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1733	68.2	812	32.0	5257	207.0	34	42	2800	6160	2800	6160	4.0	58	144	B/50 kmph	B/30 mph
300/95R-52 12.4R-52 151 A8/B		W 10	W 9 W 11		305	12.1	1892	75.0	889	35.0	5664	223.0	45	56	3450	7590	3450	7590	4.0	58	151		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

STEEL BELTED RADIAL ROW CROP TYRES (R-1W)

90/95 SERIES

- Self cleaning tread design.
- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.
- Cut and puncture resistant.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
210/95R-16 7.50R-16 106 A8/B	RC-999	W 6.5	W 6 W 7	TL	208	8.2	805	31.7	361	14.2	2416	95.1	28	35	950	2090	950	2090	2.4	35	106	B/50 kmph	B/30 mph
210/95R-18 7.50R-18 108 A8/B		W 7	W 6		214	8.4	856	33.7	386	15.2	2565	101.0	28	35	1000	2200	1000	2200	2.4	35	108		
210/90R-20 8.3R-20 110 A8/B		W 7	W 6		211	8.3	889	35.0	411	16.2	2682	105.6	35	44	1060	2332	1060	2332	2.4	35	110		
210/95R-20 7.5R-20 110 A8/B	RC-999	W 7	W 6	TL	214	8.4	907	35.7	419	16.5	2748	108.2	28	35	1060	2332	1060	2332	2.4	35	110	B/50 kmph	B/30 mph
210/95R-32 8.3R-32 120 A8/B		W 8	W 7		214	8.4	1213	47.8	559	22.0	3658	144.0	31	39	1400	3080	1400	3080	2.4	35	120		
230/95R-32 9.5R-32 128 A8/B		W 8	W 7		229	9.0	1251	49.3	584	23.0	3759	148.0	31	39	1800	3960	1800	3960	4.0	58	128		
270/95R-32 11.2R-32 136 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1327	52.2	609	24.0	4039	159.0	32	40	2240	4928	2240	4928	4.0	58	136	B/50 kmph	B/30 mph
230/95R-36 9.5R-36 130 A8/B		W 8	W 7		229	9.0	1352	53.2	609	24.0	4064	160.0	43	54	1900	4180	1900	4180	4.0	58	130		
270/95R-36 11.2R-36 139 A8/B		W 9	W 8		229	9.0	1425	56.1	663	26.1	4359	171.6	36	45	2430	5346	2430	5346	4.0	58	139		
270/95R-38 11.2R-38 140 A8/B	RC-999	W 8	W 9 W 10	TL	264	10.3	1479	58.2	686	27.0	4445	175.0	36	45	2500	5500	2500	5500	4.0	58	140	B/50 kmph	B/30 mph
230/95R-44 9.5 R-44 134 A8/B		W 8	W 7		228	9.0	1556	61.3	737	29.0	4699	185.0	33	41	2120	4664	2120	4664	4.0	58	134		
270/95R-44 11.2R-44 142 A8/B		W 8	W 9 W 10		275	10.8	1632	64.3	762	30.0	4902	193.0	33	41	2650	5830	2650	5830	4.0	58	142		
300/95R-46 12.4R-46 148 A8/B	RC-999	W 9	W 8 W 10	TL	305	12.0	1737	68.3	813	32.0	5207	205.0	46	58	3150	6930	3150	6930	4.0	58	148	B/50 kmph	B/30 mph
380/90R-46 14.9R-46 148 A8/B		W 12	W 11 W 13		380	15.0	1852	72.9	866	34.1	5648	222.4	46	58	3295	7249	3295	7249	2.4	35	155		
230/95R-48 9.5R-48 136 A8/B		W 8	W 7		228	9.0	1657	65.2	787	30.1	4978	196.0	33	41	2240	4928	2240	4928	4.0	58	136		
270/95R-48 11.2R-48 144 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1733	68.2	812	32.0	5257	207.0	34	42	2800	6160	2800	6160	4.0	58	144	B/50 kmph	B/30 mph
300/95R-52 12.4R-52 151 A8/B		W 10	W 9 W 11		305	12.1	1892	75.0	889	35.0	5664	223.0	45	56	3450	7590	3450	7590	4.0	58	151		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

RADIAL HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph		
					mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	kg	lbs							
750/65R-26 28L R-26 171 A8/B	SR-65	DW 25B	DW 23B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	50	62	6150	13530	6150	13530	3.0	42	171	B/50kmph	B/30 mph
800/65R-32 30.5LR-32 181 A8/178 B		DW 27B	DW 25B DW 27B		818	32.2	1855	73.2	838	33.0	5588	220.0	46	58	8250	18150	7500	16500	3.6	52	178	B/40kmph	B/25 mph

STEEL BELTED RADIAL HARVESTER TYRES

- Cut and puncture resistant.
- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph		
					mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	kg	lbs							
750/65R-26 28L R-26 171 A8/B	SR-65	DW 25B	DW 23B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	50	62	6150	13530	6150	13530	3.0	42	171	B/50kmph	B/30 mph
800/65R-32 30.5LR-32 181 A8/178 B		DW 27B	DW 25B DW 27B		818	32.2	1855	73.2	838	33.0	5588	220.0	46	58	8250	18150	7500	16500	3.6	52	178	B/40kmph	B/25 mph

RADIAL HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi	kmph	mph	
620/75R-26 23.1R-26 166 A8/B	SR-777	DW 20B	-	TL	625	24.6	1590	62.6	729	28.7	4851	191.0	51	64	5300	11660	5300	11660	3.2	46	166	B/50kmph	B/30 mph
620/75R-30 23.1R-30 168 A8/B		DW 20B	-		625	24.6	1710	65.3	780	30.7	5170	203.5	51	64	5600	12320	5600	12320	3.2	46	168	B/50kmph	B/30 mph

STEEL BELTED RADIAL HARVESTER TYRES

- Cut and puncture resistant.
- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi	kmph	mph	
620/75R-26 23.1R-26 166 A8/B	SR-777	DW 20B	-	TL	625	24.6	1590	62.6	729	28.7	4851	191.0	51	64	5300	11660	5300	11660	3.2	46	166	B/50kmph	B/30 mph
620/75R-30 23.1R-30 168 A8/B		DW 20B	-		625	24.6	1710	65.3	780	30.7	5170	203.5	51	64	5600	12320	5600	12320	3.2	46	168	B/50kmph	B/30 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

RADIAL FLOTATION TYRES

- Flotation Radial Tyres provides soil protection.
- Non directional lugs pattern enables mobility in the field.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD		bar	psi		kmph	mph
560/60R-22.5 161 D/172 A8	FR-60	AG 16	15 16 17	TL	503	19.8	1171	46.1	521	20.5	3592	141.4	31	39	6300	13860	4625	10175	2.4	35	161	D/65 kmph	D/40 mph
600/50R-22.5 159 D/170 A8		AG 20	-		612	24.1	1171	46.1	521	20.5	3592	141.4	32	40	6000	13200	4375	9625	2.4	35	159		
600/55R-26.5 165 D/176 A8	FR-60	AG 20	-	TL	612	24.1	1333	52.5	597	23.5	4092	161.1	32	40	7100	15620	5150	11330	2.4	35	165	D/65 kmph	D/40 mph
710/50R-26.5 170 D/181 A8		AG 24	AG 20		727	28.6	1385	54.5	599	23.6	4210	165.7	26	33	8250	18150	6000	13200	4.0	58	170		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

STEEL BELTED RADIAL FLOTATION TYRES *

- Enhance strength and stability.
- Flotation Radial Tyres provides soil protection.
- Non directional lugs pattern enables mobility in the field.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.
- Cut and puncture resistant.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch			40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD						
		mm	inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi	kmph	mph	
500/60R-22.5 155 D/A8	SB-60	AG 16	15 16 17	TL	503	20.0	1171	46.0	531	21.0	3576	141.0	36	45	3875	8525	3875	8525	4.0	58	155	D/65 kmph	D/40 mph
600/55R-22.5 162 D/A8		AG 20	-		595	23.0	1232	49.0	560	22.0	3758	148.0	31	39	4326	9517	4326	9517	4.0	58	162		
650/55R-22.5 167 D/A8		AG 20	-		645	25.0	1287	51.0	568	22.0	3901	154.0	36	45	5450	11990	5450	11990	4.0	58	167		
620/50R-22.5 161 D/A8	SB-60	AG 20	-	TL	600	24.0	1170	46.0	520	20.0	3601	142.0	36.5	46	4625	10175	4625	10175	4.0	58	161	D/65 kmph	D/40 mph
550/45R-22.5 154 D/A8		AG 16	15 16 17		550	22.0	1070	52.0	489	19.0	3275	129.0	25	32	3450	7590	3450	7590	4.0	58	154		
560/45R-22.5 160 D/A8		AG 16	15 16 17		543	21.0	1076	42.0	491	19.0	3306	130.0	36	45	4500	9900	4500	9900	4.0	58	160		
710/45R-22.5 165 D/A8	SB-60	AG 24	AG 20	TL	706	28.0	1212	48.0	542	21.0	3658	144.0	37	47	5150	11330	5150	11330	4.0	58	165	D/65 kmph	D/40 mph
650/55R-26.5 169 D/A8		AG 20	-		644	25.0	1389	55.0	619	24.0	4200	165.0	31	39	5800	12760	5800	12760	4.0	58	169		
710/50R-26.5 170 D/A8		AG 24	AG 20		727	29.0	1383	54.0	624	25.0	4217	166.0	30	38	6000	13200	6000	13200	4.0	58	170		
750/45R-26.5 170 D/A8	SB-60	AG 24	AG 20	TL	754	30.0	1349	53.0	606	24.0	4147	163.0	32	40	6000	13200	6000	13200	4.0	58	170	D/65 kmph	D/40 mph
800/45R-26.5 174 D/A8		AG 28	-		828	33.0	1392	55.0	618	24.0	4239	167.0	40	50	6700	14740	6700	14740	4.0	58	174		
750/60R-30.5 181 D/A8		AG 24	AG 20		754	30.0	1675	66.0	747	29.0	5092	200.0	32	40	8250	18150	8250	18150	4.0	58	181		
710/50R-30.5 173 D/A8	SB-60	AG 24	AG 20	TL	727	29.0	1485	58.0	676	27.0	4533	178.0	32	40	6500	14300	6500	14300	4.0	58	173	D/65 kmph	D/40 mph
800/45R-30.5 176 D/A8		AG 28	-		790	31.0	1495	59.0	670	26.0	4594	181.0	40	50	7165	15763	7165	15763	4.0	58	176		

* UNDER DEVELOPMENT

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%







BIAS TRACTOR REAR TYRES (R-1)

- Specially designed for better traction, self cleaning and stability.
- Ideally suitable in all operating conditions.
- Superior tread.



GRIPKING

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
8.00-20	GRIPKING	8	7.0	TT	229	9.0	965	38.0	457	18.0	2845	112.0	27	34	920	2024	2.1	30	105	A6/30 kmph	A6/20 mph
8.3-20		8	7.0		211	8.3	900	35.4	406	16.0	2704	106.5	22	27	825	1808	2.5	35	101		
9.5-20		8	7.0		241	9.5	955	37.6	432	17.0	2942	115.8	27	34	975	2145	2.8	41	107		
11.2-20		8	10.0		284	11.2	998	39.7	483	19.0	2997	118.0	33	41	1090	2398	2.4	35	111		
8.3-22	GRIPKING	6	7.0	TT	211	8.3	950	37.4	457	18.0	2972	117.0	24	30	800	1760	2.8	41	100	A6/30 kmph	A6/20 mph
8.3-22		8	7.0		241	9.5	991	39.3	457	18.0	2972	117.0	24	30	900	1980	3.1	45	104		
9.5-22		6	7.0		241	9.5	991	39.3	457	18.0	2972	117.0	24	30	900	1980	2.2	32	104		
9.5-22		8	7.0		241	9.5	991	39.3	457	18.0	2972	117.0	24	30	1060	2335	2.9	42	110		
8.3-24	GRIPKING	6	7.0	TT	211	8.3	993	39.1	457	18.0	2921	115.0	26	32	800	1760	2.4	35	100	A6/30 kmph	A6/20 mph
8.3-24		8	7.0		211	8.3	993	39.1	457	18.0	2921	115.0	26	32	925	2035	3.1	45	105		
9.5-24		8	7.0		241	9.5	1050	41.3	483	19.0	3099	122.0	26	32	1120	2464	2.9	41	112		
9.5-24		12	10.0		284	11.2	1105	43.5	508	20.0	3251	128.0	31	39	1250	2750	2.4	35	116		
11.2-24	GRIPKING	8	11.0	TT	315	12.4	1170	46.0	533	21.0	3404	134.0	29	36	1450	3190	2.3	33	121	A6/30 kmph	A6/20 mph
12.4-24		12	11.0		315	12.4	1170	46.0	533	21.0	3404	134.0	29	36	1800	3960	3.5	50	128		
13.6-24		8	12.0		345	13.5	1210	47.6	559	22.0	3556	140.0	30	38	1550	3410	1.9	28	123		
13.6-24		12	12.0		345	13.5	1210	47.6	559	22.0	3556	140.0	30	38	1900	4180	2.8	41	130		
14.9-24	GRIPKING	8	13.0	TT	378	14.9	1265	49.8	584	23.0	3708	146.0	32	40	1800	3960	1.8	26	128	A6/30 kmph	A6/20 mph
14.9-24		12	13.0		378	14.9	1265	49.8	584	23.0	3708	146.0	32	40	2180	4795	2.6	37	135		
21.3-24		12	18.0		540	21.3	1400	55.1	644	25.3	4221	166.1	43	54	3860	8492	2.2	32	155		
21.3-24		16	18.0		540	21.3	1400	55.1	644	25.3	4221	166.1	43	54	4500	9900	2.8	40	160		
13.6-26	GRIPKING	8	12.0	TT	345	13.6	1260	49.6	584	23.0	3708	146.0	31	39	1700	3740	2.1	31	126	A6/30 kmph	A6/20 mph
14.9-26		8	13.0		378	14.9	1315	51.7	610	24.0	3861	152.0	31	39	1850	4070	1.8	26	129		
14.9-26		12	13.0		378	14.9	1315	51.7	610	24.0	3861	152.0	31	39	2240	4928	2.6	38	136		
14.9-26		12	20.0		587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	3650	8030	1.7	25	153		
23.1-26	GRIPKING	16	20.0	TT/TL	587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	4375	9625	2.3	33	159	A6/30 kmph	A6/20 mph
23.1-26		18	20.0		587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	4625	10175	2.6	38	161		
11.2-28		8	10.0		284	11.2	1205	47.4	559	22.0	3531	139.0	33	41	1320	2904	2.4	34	118		
11.2-28		12	10.0		284	11.2	1205	47.4	559	22.0	3531	139.0	33	41	1450	3190	2.5	36	121		
12.4-28	GRIPKING	8	11.0	TT	378	14.9	1265	49.8	584	23.0	3708	146.0	35	44	1550	3410	2.3	33	123	A6/30 kmph	A6/20 mph
12.4-28		12	11.0		378	14.9	1265	49.8	584	23.0	3708	146.0	35	44	1950	4290	3.4	50	131		
13.6-28		8	12.0		378	14.9	1320	52.0	584	23.0	3861	152.0	37	46	1650	3630	2.0	29	125		
13.6-28		12	12.0		378	14.9	1320	52.0	584	23.0	3861	152.0	37	46	2120	4664	2.9	41	134		
14.9-28	GRIPKING	8	13.0	TT	378	14.9	1365	53.7	635	25.0	4013	158.0	33	41	1900	4180	1.8	26	130	A6/30 kmph	A6/20 mph
14.9-28		12	13.0		378	14.9	1365	53.7	635	25.0	4013	158.0	33	41	2300	5070	2.6	38	137		
16.9-28		8	15.0		429	16.9	1435	56.5	660	26.0	4216	166.0	36	45	2180	4796	1.8	25	135		
16.9-28		12	15.0		429	16.9	1435	56.5	660	26.0	4216	166.0	36	47	2725	5995	2.4	35	143		
16.9-30	GRIPKING	8	15.0	TT	429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	2300	5060	1.7	24	137	A6/30 kmph	A6/20 mph
16.9-30		12	15.0		429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	2725	5995	2.4	36	139		
16.9-30		14	15.0		429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	3000	6600	2.8	41	143		
16.9-30		14	15.0		429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	3000	6600	2.8	41	143		
18.4-30	GRIPKING	8	16.0	TT	467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	2430	5345	1.4	20	139	A6/30 kmph	A6/20 mph
18.4-30		10	16.0		467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	2900	6380	1.8	26	145		
18.4-30		14	16.0		467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	3450	7590	2.6	38	151		
18.4-30		14	16.0		467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	3450	7590	2.6	38	151		
12.4-32	GRIPKING	8	11.0	TT	325	12.8	1359	53.5	635	25.0	3988	157.0	30	38	1600	3520	2.3	33	124	A6/30 kmph	A6/20 mph
12.4-32		12	11.0		325	12.8	1359	53.5	635	25.0	3988	157.0	30	38	1900	4180	3.0	44	130		

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.9-34	GRIPKING	8	15.0	TT	430	16.9	1590	62.6	737	29.0	4648	183.0	44	55	2430	5346	1.7	25	139	A6/30 kmph	A6/20 mph
		14											44	55	3000	6600	2.8	41	146		
18.4-34		8	16.0		467	18.4	1660	65.3	762	30.0	4851	191.0	39	48	2650	5830	1.4	20	142		
		12											39	48	3000	6600	2.2	32	146		
20.8-34		14	18.0		528	20.8	1760	69.2	790	31.1	5156	203.0	39	48	3750	8250	2.4	35	154		
		18											35	44	3250	7150	1.4	20	149		
12.4-36	GRIPKING	8	11.0	TT	325	13.0	1465	58.0	696	28.0	4546	186.0	42	53	1700	3740	2.3	33	126	A6/30 kmph	A6/20 mph
		12											42	53	2120	4664	2.8	41	134		
13.6-36		8	12.0		345	13.6	1520	59.5	717	28.2	4647	183.0	34	42	1850	4070	2.0	29	129		
		10											34	42	2060	4530	2.2	32	133		
12.4-38		12	11.0		315	12.4	1511	59.5	716	28.2	4496	177.0	34	42	2300	5060	2.5	36	137		
		8											34	42	1750	3850	2.3	33	127		
13.6-38	GRIPKING	8	12.0	TT	345	13.6	1565	61.6	737	29.0	4597	181.0	37	46	1950	4290	2.0	28	131	A6/30 kmph	A6/20 mph
		12											37	46	2430	5360	3.0	44	139		
14.00-38		8	12.0		355	14.0	1570	61.8	737	29.0	4597	181.0	39	49	1950	4290	2.0	28	131		
		12											39	49	2430	5346	3.0	44	139		
14.9-38		8	13.0		378	15.0	1685	66.3	737	29.0	4597	181.0	41	51	2120	4664	2.4	35	134		
		12											41	51	2575	5665	3.0	43	141		
15.5-38	8	14.0	395	15.5	1585	62.4	737	29.0	4648	183.0	41	51	2060	4532	1.8	26	133				
	12										41	51	2575	5665	2.8	41	141				
16.9-38	GRIPKING	8	15.0	TT	429	16.9	1685	66.3	787	31.0	4953	195.0	35	44	2575	5665	1.8	26	141	A6/30 kmph	A6/20 mph
		14											35	44	3450	7590	2.4	35	151		
18.4-38		8	16.0		467	18.4	1770	69.6	813	32.0	5156	203.0	39	49	2725	5995	1.4	20	143		
		14											39	49	3650	8030	2.3	33	153		
20.8-38		8	18.0		528	20.8	1840	72.4	864	34.0	5385	212.0	41	51	3150	6930	1.3	19	148		
		12											41	51	4000	8800	2.0	29	156		
	14	41		51									4500	9900	2.4	35	160				
	28	41		51									5800	12760	4.3	62	169				

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.







Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

BIAS TRACTOR REAR TYRES (R-1)

- Deep tread and excellent tread wear and durability.
- Designed to deliver power to the ground.
- Design offers maximum cleaning and sidewall slip resistance.



GRIPKING HD







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
12.4-24	GRIPKING HD	8	11.0	TT	315	12.4	1170	46.0	533	21.0	3404	134.0	30	38	1450	3190	2.3	33	121	A6/30 kmph	A6/20 mph
		12											30	38	1800	3960	3.5	50	128		
14.9-24		8	13.0	TT	378	14.9	1265	49.8	584	23.0	3708	146.0	32	40	1800	3960	1.8	26	128		
		12											32	40	2180	4795	2.6	37	135		
15.5/80-24		12	13.0	TL	394	15.5	1260	49.6	584	23.0	3708	146.0	40	50	2900	6380	3.0	43	145		
		16											40	50	3450	7590	4.0	58	151		

BIAS TRACTOR REAR TYRES (R-1)

- Unique lug design ensures excellent traction in both dry and wet soil conditions.
- Specially designed profile for better stability.



PK-318 HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.9-26	PK-318 HD	12	14.0	TT/TL	429	16.9	1385	54.5	635	25.0	4064	160.0	38	49	2500	5500	2.3	33	140	A6/30 kmph	A6/20 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

BIAS TRACTOR REAR TYRES (R-1)

- Ensures improved traction in all working conditions.
- Cut and chip resistant tread compound.



PK-319

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch																		
18.4-26	PK-319	12	16.0	TT/TL	467	18.4	1465	57.6	635	25.0	4216	166.0	41	51	3000	6600	2.3	33	146	A6/30 kmph	A6/20 mph
		16											41	51	3650	8030	3.0	44			

BIAS TRACTOR REAR TYRES (R-1)

- Multi angled lugs for better traction and self cleaning.
- Cut resistant tread compound for longer type life.



FIELDKING

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch																		
12.4-28	FIELDKING	12	11.0	TT	315	12.4	1270	50.0	584	23.0	3708	146.0	41	51	1950	4290	3.1	44	131	A6/30 kmph	A6/20 mph
13.6-28		12	12.0		345	13.6	1330	52.4	584	23.0	3861	152.0	38	47	2060	4532	2.4	34	133		
14.9-28		12	13.0		378	14.9	1365	53.7	635	25.0	4013	158.0	41	51	2300	5060	2.6	37	137		
16.9-28		12	15.0		429	16.9	1435	56.5	660	26.0	4216	166.0	42	52	2725	5995	2.4	34	143		
	14	42		52	3000		6600		2.6		38		146								

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

BIAS TRACTOR REAR TYRES (R-1)

- Broader lug design and strong casing.
- Better soil penetration and self cleaning.



POWERLUG

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
12.4-28	POWERLUG	12	11.0	TT	315	12.4	1270	50.0	584	23.0	3708	146.0	39	49	1950	4290	3.1	44	131	A6/30 kmph	A6/20 mph
13.6-28		12	12.0		345	13.6	1330	52.4	584	23.0	3861	152.0	40	50	2120	4664	2.4	34	133		
18.4-30		8	16.0		467	18.4	1544	60.8	711	28.0	4851	191.0	42	52	2430	5345	1.6	23	139		
		10			42	52	2900	6380	1.8	26	145										
	14	42	52	3450	7590	2.6	38	151													

BIAS TRACTOR REAR TYRES (R-1)

- Deeper tread suitable for soil tillage operations.
- Excellent self cleaning properties.



TR-21

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.9-30	TR-21	8	15.0	TT	429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	2300	5070	2.1	30	137	A6/30 kmph	A6/20 mph
		10											40	50	2500	5500	2.2	32	140		
		12											40	50	2725	5995	2.5	36	143		
		14											40	50	3000	6600	2.8	40	146		
18.4-30	TR-21	8	16.0	TT	467	18.4	1544	60.8	711	28.0	4851	191.0	42	52	2436	5359	1.4	20	139	A6/30 kmph	A6/20 mph
		10											42	52	2650	5830	1.7	24	142		
		12											42	52	2865	6303	1.9	28	144		
		14											42	52	3250	7150	2.3	33	149		







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

HARVESTER TYRES

- Specially designed for harvesting applications.
- Provides excellent traction and self cleaning properties.



GRIPKING







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23.1-26	GRIPKING	12	20.0	TT/TL	587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	3650	8030	1.7	25	153	A6/30 kmph	A6/20 mph
		16											43	54	4375	9625	2.3	33	159		
		18											43	54	4625	10175	2.6	37	161		
23.1-30	GRIPKING	12	20.0	TT/TL	600	24.0	1700	67.0	773	32.0	5217	213.0	55	69	3875	8525	1.7	25	155	A6/30 kmph	A6/20 mph
		18											55	69	5000	11000	2.6	38	164		

HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.



PK-319 HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
18.4-26	PK-319 HD	12	16.0	TT/TL	467	18.4	1465	57.6	635	25.0	4216	166.0	41	51	3000	6600	2.3	33	146	A6/30 kmph	A6/20 mph
		16											41	51	3650	8030	3.0	44	153		
24.5-32	PK-319 HD	12	21.0	TT/TL	622	24.5	1806	71.1	808	31.8	5340	210.4	43	54	4375	9625	1.7	25	159	A6/30 kmph	A6/20 mph
		16											43	54	5000	11000	2.4	34	164		
30.5L-32	PK-319 HD	14	27.0	TT/TL	770	30.3	1864	73.4	831	32.7	5519	217.3	48	60	5000	11000	1.6	23	164	A6/30 kmph	A6/20 mph
		16											48	60	5450	11990	1.8	26	167		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

IRRIGATION TYRES

- Ideal for pivot irrigation.
- Specially designed lugs for crop protection and minimizing soil damage.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
12.4-24	IR-005	6	11.0	TT/TL	315	12.4	1170	46.1	508	20.0	3200	126.0	27	34	1215	2673	1.6	23	115	A6/30 kmph	A6/20 mph
		8													1320	2900	1.8	26	118		
14.9-24	IR-005	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	28	35	1550	3410	1.4	20	123	A6/30 kmph	A6/20 mph
		8													1800	3960	1.8	26	128		

IRRIGATION TYRES

- Designed for irrigation service with minimal soil compaction and excellent wear.
- Long service life thanks to the use of a wear resistant tread compound.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
11.2-24	IR-007	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	24	30	1060	2330	1.8	26	110	A6/30 kmph	A6/20 mph
		8													1120	2465	2.1	30	112		
14.9-24	IR-007	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1550	3410	1.4	20	123	A6/30 kmph	A6/20 mph
		8													1800	3960	1.8	26	128		
11.2-38	IR-007	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	28	35	1285	2827	1.8	26	117	A6/30 kmph	A6/20 mph
		8													1550	3410	2.1	30	123		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

IRRIGATION TYRES

- Specially designed lug design is ideal for irrigation application.
- Minimize soil damage and excellent wear.



IR-009

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
11.2-24	IR-009	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	24	30	1060	2330	1.8	26	110	A6/30 kmph	A6/20 mph
		8													1120	2465	2.1	30	112		
14.9-24	IR-009	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1550	3410	1.4	20	123	A6/30 kmph	A6/20 mph
		8													1800	3960	1.8	26	128		
11.2-38	IR-009	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	28	35	1285	2827	1.8	26	117	A6/30 kmph	A6/20 mph
		8													1550	3410	2.1	30	123		

IRRIGATION TYRES

- Specially designed lug design is ideal for irrigation application.
- Minimize soil damage and excellent wear.



AGRI ND-5

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
11.2-24	AGRI ND-5	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	26	32	1060	2330	1.8	26	110	A6/30 kmph	A6/20 mph
		8													1120	2465	2.1	30	112		
14.9-24	AGRI ND-5	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	33	41	1550	3410	1.4	20	123	A6/30 kmph	A6/20 mph
		8													1800	3960	1.8	26	128		
11.2-38	AGRI ND-5	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	30	38	1285	2827	1.8	26	117	A6/30 kmph	A6/20 mph
		8													1550	3410	2.1	30	123		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

RADIAL IRRIGATION TYRES

- Wider and stronger tread with durable sidewall.
- Low air pressure ensures less compaction.
- Wider profile for better flotation and foot.



RADIAL AGRI ND-5

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
270/95R-38 140 A8/B	RADIAL AGRI ND-5	W 9	W 8 W 10	TL	275	10.8	1479	58.2	697	27.4	4510	177.6	36	45	1550	3410	1550	3410	1.6	23	140	A8/40 kmph	A8/25 kmph






* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

FLOTATION IMPLEMENT TYRES

- Suitably designed for on and off-the-road use, in all weather conditions.
- Patterns are engineered to provide excellent to drive wheels and are suited for both implement & industrial/ construction applications.



FLOTATION KING

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD	LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
									40KPH MAX LOAD	50KPH MAX LOAD	25 MPH MAX LOAD	30 MPH MAX LOAD		bar	psi	kmph	mph							
																		mm	inch		mm	inch	mm	inch
400/60-15.5	FLOTATION KING	14	13.0	TL	400	15.7	875	34.4	381	15.0	2565	101.0	20	25	2731	2272	6010	5000	3.6	51	136	A8/40 kmph	A8/25 mph	
14.0/65-16		18											20	25	3256	2772	7165	6100	4.5	65	144			
19.0/45-17	FLOTATION KING	18	16.0	TL	470	19.0	866	34.0	380	16.0	2536	104.0	23	29	4410	3150	9702	6930	3.3	48	148	A8/40 kmph	A8/25 mph	
520/50-17		16											20.0	22	27	4375	3075	9625	6765	3.6	51			147
400/55-22.5	FLOTATION KING	16	11.75	TL	403	15.9	1020	40.1	432	17.0	3073	121.0	23	29	2574	2254	5510	4960	4.1	58	136	B/50 kmph	B/30 mph	
400/60-22.5		16											11.75	23	29	2806	2245	6175	4940	1.5	22			136
385/65-22.5		18											11.75	23	29	3156	2504	6945	5510	3.8	55			140
		16											11.75	23	29	2800	2245	6175	4940	3.6	22			136
500/45-22.5	FLOTATION KING	16	16.0	TL	500	19.7	1050	42.1	457	18.0	3099	122.0	26	32	3080	2436	6780	5360	3.7	52	138	B/50 kmph	B/30 mph	
500/60-22.5		16											16.0	23	29	3456	3156	7605	6945	2.8	41			148
550/60-22.5		16											16.0	27	34	3760	3356	8270	7385	3.1	45			150
600/50-22.5		16											20.0	27	34	3600	3256	8050	7165	2.2	32			149
600/55-22.5	FLOTATION KING	16	20.0	TL	600	23.6	1230	48.4	533	21.0	3708	146.0	27	34	4010	3659	8820	8050	2.2	32	153	B/50 kmph	B/30 mph	
700/40-22.5		18											24.0	26	32	4250	3875	9350	8525	2.5	36			155
700/50-26.5		UNDER DEVELOPMENT																						
800/45-26.5	UNDER DEVELOPMENT																							






* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

DRIVE WHEEL TYRES (R-2)

- Extra deep tread specially designed to get excellent traction on wet and sticky soil with excellent self cleaning properties, preventing mud clogging between lugs.
- Tough tread compound to resist extreme conditions.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
									mm	32nds	kg	lbs	bar	psi	kmph	mph					
																	mm	inch		mm	inch
12.4-24	TR-2	8	11.0	TT	315	12.4	1195	47.0	550	21.7	3722	146.5	61	76	1450	3190	2.3	33	121	A6/30 kmph	A6/20 mph
		12											61	76	1800	3960	2.8	40	128		
14.9-24	TR-2	8	13.0	TT	380	15.0	1310	51.6	595	23.4	4044	159.2	61	76	1800	3960	1.8	26	128	A6/30 kmph	A6/20 mph
		12											61	76	2180	4795	2.3	33	135		
13.6-28	TR-2	8	12.0	TT	350	13.8	1325	52.2	615	24.2	4015	158.1	65	82	1650	3630	2.0	30	125	A6/30 kmph	A6/20 mph
		12											65	82	2120	4664	3.0	44	134		
14.9-28	TR-2	12	13.0	TT	388	15.0	1380	54.0	642	25.0	4176	164.0	40	50	2300	5060	2.6	38	137	A6/30 kmph	A6/20 mph
18.4-30	TR-2	8	16.0	TT	465	18.3	1580	62.2	711	28.0	4724	186.0	71	89	2430	5345	1.4	20	139	A6/30 kmph	A6/20 mph
		10											71	89	2900	6380	2.0	30	145		
		12											71	89	3250	7150	2.3	33	149		
		14											71	89	3450	7590	2.6	38	151		
18.4-34	TR-2	8	16.0	TT	465	18.3	1682	66.2	762	30.0	5029	198.0	71	89	2650	5830	1.4	20	142	A6/30 kmph	A6/20 mph
		10											71	89	3000	6600	1.8	26	146		
		12											71	89	3450	7590	2.2	32	151		
		14											71	89	3550	7810	2.6	38	152		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

BIAS TRACTOR

FRONT TYRES

- Penetrates deep into soil for maximum steering control and minimal lateral side-slip because of its high center rib.
- Best for handling heavy loads on hard-packed surfaces.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED		
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph	
			inch																			
3.50-6	F-2	4	2.5	TT	99	3.9	343	13.5	214	8.4	1341	52.8	9	11	165	363	2.7	38	45	A8/40 kmph	A8/25 mph	
3.50-8		4	2.5		101	4.0	371	14.6	218	8.6	1390	54.7	10	13	185	407	2.7	38	49			
4.00-8		4	3.0		112	4.4	430	16.9	224	8.8	1430	56.3	10	13	224	493	2.8	40	56			
4.00-12		4	3.0		112	4.4	530	20.8	254	10.0	1626	64.0	11	14	300	660	2.8	40	66			
4.00-15	F-2	4	3.0	TT	112	4.4	610	24.0	295	11.6	1854	73.0	9	11	307	675	2.8	40	67	A8/40 kmph	A8/25 mph	
5.00-15		6	4.0		140	5.5	655	25.8	305	12.0	1956	77.0	13	16	475	1045	3.7	54	82	A6/30 kmph	A6/20 mph	
4.00-16		4	3.0		112	4.4	640	25.2	305	12.0	1956	77.0	11	14	325	715	3.3	48	69	A8/40 kmph	A8/25 mph	
4.50-16	F-2	6	3.0	TT	122	4.8	665	26.2	305	12.0	1956	77.0	11	14	365	803	3.2	47	73	A6/30 kmph	A6/20 mph	
5.00-16		6	4.0		140	5.5	680	26.8	330	13.0	2032	80.0	11	14	400	880	3.3	48	76	A8/40 kmph	A8/25 mph	
5.50-16		6	4.0		150	5.9	710	27.9	330	13.0	2083	82.0	13	16	425	935	3.3	48	78	A8/40 kmph	A8/25 mph	
6.00-16		8	4.5		165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.4	64	94	A6/30 kmph	A6/20 mph	
6.50-16		8	4.5		175	6.8	760	29.9	356	14.0	2286	90.0	12	15	750	1650	3.3	48	98	A8/40 kmph	A8/25 mph	
7.50-16	F-2	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	15	18	875	1925	3.7	54	103	A8/40 kmph	A8/25 mph	
9.00-16		12			7.0	234	9.2	854	33.6	406	16.0	2540	100.0	16	20	1250	2750	3.8	55	116	A6/30 kmph	A6/20 mph
10.00-16		10	7.0	TT/TL	275	10.8	900	35.4	406	16.0	2692	106.0	19	24	1360	2992	2.8	41	119	A8/40 kmph	A8/25 mph	
11.00-16		12	10	320	12.6	970	38.1	457	18.0	2896	114.0	24	30	1600	3520	2.5	36	124	A8/40 kmph	A8/25 mph		
7.50-18	F-2	8	5.5	TT	204	8.0	867	34.2	406	16.0	2565	101.0	16	20	950	2090	3.7	54	106	A8/40 kmph	A8/25 mph	
4.00-19		12			3.0	112	4.4	712	28.0	330	13.0	2134	84.0	11	14	355	781	3.4	48	72	A6/30 kmph	A6/20 mph
6.00-19		8	4.5		165	6.5	814	32.0	381	15.0	2413	95.0	13	16	615	1353	3.3	48	91	A8/40 kmph	A8/25 mph	
6.50-20	F-2	8	4.5	TT	173	6.8	864	34.0	406	16.0	2565	101.0	14	17	850	1870	3.3	48	102	A6/30 kmph	A6/20 mph	
7.50-20		8			8.0	203	8.0	920	36.2	432	17.0	2718	107.0	18	22	1030	2266	3.5	50	109	A8/40 kmph	A8/25 mph
		12			5.5	18	22	1320	2904	4.0	58	118										

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%







BIAS TRACTOR

FRONT TYRES

- On and off road type for 2WD tractor.
- Ensures better steering control on fields.



SW-201

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.00-15	SW-201	4	3.0	TT	112	4.4	610	24.0	295	11.6	1854	73.0	13	16	307	675	3.1	45	67	A8/40 kmph	A8/25 mph
5.00-15		4	3.0		140	5.5	655	25.8	305	12.0	1956	77.0	15	19	365	803	3.7	54	73		
4.00-16		4	3.0		112	4.4	640	25.2	305	12.0	1956	77.0	11	14	325	715	3.3	48	69	A6/30 kmph	A6/20 mph
4.50-16		6	3.0		122	4.8	665	26.2	305	12.0	1956	77.0	11	14	365	803	3.3	48	73		
5.00-16	SW-201	6	4.0	TT	140	5.5	680	26.8	330	13.0	2032	80.0	11	14	400	880	4.1	60	76	A8/40 kmph	A8/25 mph
5.50-16		6	4.0		150	5.9	710	27.9	330	13.0	2083	82.0	13	16	530	1166	3.6	52	86		
6.00-16		8	4.5		165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.4	64	94	A6/30 kmph	A6/20 mph
6.50-16		8	4.5		175	6.8	760	29.9	356	14.0	2286	90.0	13	16	750	1650	3.3	48	98		
7.50-16		8	5.5		205	8.0	808	31.8	381	15.0	2413	95.0	16	20	875	1925	3.7	54	103		
		12			16	20	1360	2990	4.1	60	119										
6.00-18	SW-201	8	4.5	TT	165	6.5	795	31.3	457	18.0	2340	92.1	12	15	710	1562	3.2	47	96	A8/40 kmph	A8/25 mph
7.50-18		8	5.5		203	8.0	869	34.2	406	16.0	2565	101.0	15	19	950	2090	3.7	54	106		
6.00-19		8	4.5		165	6.5	814	32.0	381	15.0	2413	95.0	13	16	925	2035	4.2	60	105	A6/30 kmph	A6/20 mph
6.50-20		8	4.5		173	6.8	864	34.0	406	16.0	2565	101.0	18	22	850	1870	3.3	48	102		
7.50-20		8	5.5		20	25	1030	2266	3.3	48	109	A8/40 kmph	A8/25 mph								
		12			20	25	1320	2900	4.0	58	118			A6/30 kmph	A6/20 mph						







BIAS TRACTOR

FRONT TYRES

- On and off road type for 2WD tractor.
- Ensures better steering control on fields.
- Extra deep tread.



SW-66

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
6.00-16	SW-66	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	25	31	670	1474	4.4	64	94	A6/30 kmph	A6/20 mph
		10											25	31	775	1705	4.7	68	99		







BIAS TRACTOR

FRONT TYRES

- Specially designed lugs for comfortable drive and added traction.
- Ideal for heavy duty application.



SW-101

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
6.00-16	SW-101	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	13	15	670	1474	4.4	64	94	A6/30 kmph	A6/20 mph
6.50-16		8	4.5		175	6.8	760	29.9	356	14.0	2286	90.0	13	15	750	1650	3.3	48	98		
7.50-16		8	5.5		205	8.0	808	31.8	381	15.0	2413	95.0	16	20	875	1925	3.7	54	103		
		12			16	20	1300	2860	4.7	68	118										
7.50-18		8	5.5		205	8.0	869	34.2	406	16.0	2565	101.0	15	19	950	2090	3.7	54	106	A8/40 kmph	A8/25 mph
		12			15	19	1360	2990	4.3	62	119										







BIAS TRACTOR

FRONT TYRES

- Offers better durability and self cleaning.
- Sturdy and strong body plies for longer durability.



SW-99

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
5.00-12	SW-99	6	3.0	TT	140	5.5	580	22.8	270	10.6	1736	68.3	13	16	265	583	3.2	45	62	A6/30 kmph	A6/20 mph
5.00-15		6	4.0		140	5.5	655	25.8	305	12.0	1956	77.0	15	19	475	1045	3.7	54	82	A8/40 kmph	A8/25 mph
5.50-16		6	4.0		150	5.9	710	27.9	330	13.0	2083	82.0	13	16	530	1166	3.6	52	86	A6/30 kmph	A6/20 mph
6.00-16		8	4.5		165	6.5	745	29.3	356	14.0	2184	86.0	18	22	670	1474	4.4	64	94		
7.50-20		8	5.5		203	8.0	920	36.2	432	17.0	2718	107.0	19	24	1030	2266	3.5	50	109	A8/40 kmph	A8/25 mph
		12			19	24	1320	2900	4.0	58	118	A6/30 kmph	A6/20 mph								

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

BIAS TRACTOR

FRONT TYRES

- Provides excellent load distribution.
- Special version ensures extra puncture resistance.



TF-2000

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
6.00-16	TF-2000	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.4	64	94	A6/30 kmph	A6/20 mph

BIAS TRACTOR

FRONT TYRES

- Specially designed to firm the soil around the seed.
- Extra deep ribs help to keep planter in line on hills.



DUAL RIB

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.50-20	DUAL RIB	8	5.5	TT	203	8.0	942	37.1	442	17.4	2718	107.0	15	19	1030	2266	3.5	50	109	A6/30 kmph	A6/20 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

BIAS TRACTOR

FRONT TYRES

- Field and road type for 2WD tractor.
- Cut and chip resistant and heavy duty service.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	mm
6.50-20	SW-200	8	4.5	TT	173	6.8	864	34.0	406	16.0	2565	101.0	14	17	850	1870	3.3	48	102	A8/40 kmph	A8/25 mph
		12			14	17	1120	2465	3.8	55	112										

BIAS ROW CROP TYRES

- Excellent traction and directional stability.
- Deep lugs, low slip and optimized rubber compounds help reduce wear to give exceptionally long tire life.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	mm
4.00-21	GRIP QUEEN	6	3.0	TT	115	4.5	762	30.0	350	13.8	2247	88.5	7	9	180	396	1.8	25	48	A8/40 kmph	A8/25 mph
4.00-36		6	3.0		120	4.7	1140	44.9	524	20.6	3364	132.5	7	9	412	906	2.8	41	77	A6/30 kmph	A6/20 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

BIAS ROW CROP TYRES

- Specially designed bias tyre for row crop.
- Excellent self cleaning properties and ensures no damage to the crops.



GRIPKING R-1

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD 	LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED		
					mm	inch	mm	inch	mm	inch	mm	inch		mm	32nds	kg	lbs		bar	psi	kmph
3.00-17	GRIPKING R-1	6	1.85	TL	80	3.2	602	23.7	285	11.2	1800	70.9	12	15	190	418	2.8	41	50	A8/40 kmph	A8/25 mph
100/90-17		6	2.50		101	4.0	612	26.6	288	11.3	1830	72.1	11	14	218	480	2.3	34	55		
3.00-18		6	1.85		80	3.2	627	24.7	297	11.7	1875	73.9	11	14	200	440	2.8	41	52		
100/90-18		6	2.50		101	4.0	637	25.1	301	11.9	1905	75.0	11	14	224	493	2.3	34	56		
3.25-19	GRIPKING R-1	6	2.15	TL	89	3.5	665	26.2	314	12.4	1988	78.3	12	15	250	550	2.8	41	60	A8/40 kmph	A8/25 mph
3.50-19		6	2.15		93	3.7	675	26.2	318	12.5	2018	79.5	12	15	272	598	2.8	41	63		
4.50-19		6	3.0		122	4.8	736	29.0	343	13.5	2146	84.5	15	19	487	1071	4.4	64	83		
4.00-21		6	3.0		115	4.5	762	30.0	350	13.8	2247	88.5	11	14	180	396	1.8	25	48		
5.00-21	GRIPKING R-1	6	4.0	TT	140	5.5	823	32.4	360	14.2	2310	91.0	11	14	435	957	2.7	38	79	A6/30 kmph	A6/20 mph
8.3-28		8	7.0		211	8.3	1095	43.1	533	21.0	3251	128.0	28	35	1000	2200	2.4	34	108		
9.5-28		8	8.0		241	9.5	1156	45.5	543	21.4	3350	132.0	29	36	1180	2596	2.8	40	114		
4.00-30		4	3.0		116	4.5	995	39.1	457	18.0	2938	115.7	13	16	355	781	1.3	19	72		
7.2-30	GRIPKING R-1	6	6.0	TT	183	7.2	1095	43.1	533	21.0	3225	126.9	28	35	775	1705	2.4	35	99	A6/30 kmph	A6/20 mph
8		183			7.2	1095	43.1	533	21.0	3225	126.9	28	35	775	1705	2.4	35	99			
9.5-30		8	8.0		241	9.5	1200	47.2	559	22.0	3531	139.0	30	37	1215	2673	2.8	40	115		
8.3-32		8	7.0		211	8.3	1193	47.0	584	23.0	3581	141.0	32	40	1090	2398	3.2	45	111		
9.5-32	GRIPKING R-1	8	8.0	TT	241	9.5	1255	49.4	584	23.0	3683	145.0	32	40	1285	2827	2.4	35	117	A6/30 kmph	A6/20 mph
4.00-36		6	3.0		120	4.7	1140	44.9	524	20.6	3364	132.5	13	16	412	906	2.8	41	77		
4.50-36		6	3.0		135	5.3	1150	45.2	530	20.9	3402	134.0	13	16	450	990	2.4	35	80		
5.00-36		6	3.0		145	5.7	1175	46.2	540	21.3	3456	136.0	14	17	462	1016	2.4	35	81		
7.2-36	GRIPKING R-1	8	6.0	TT	183	7.2	1255	49.4	610	24.0	3810	150.0	31	39	1000	2200	3.3	48	108	A6/30 kmph	A6/20 mph
8.3-36		8	7.0		211	8.3	1293	50.9	610	24.0	3810	150.0	29	36	1150	2530	3.2	46	113		
9.5-36		8	8.0		241	9.5	1359	53.5	623	24.5	4000	157.5	31	39	1320	2904	2.4	35	118		
12.4-36		8	11.0		315	12.4	1465	57.7	686	27.0	4318	170.0	28	35	1700	3740	2.3	33	126		
8.3-38	GRIPKING R-1	8	7.0	TT	211	8.3	1350	53.1	621	24.5	3986	157.0	32	40	1250	2750	3.5	50	116	A6/30 kmph	A6/20 mph
9.5-38		8	8.0		241	9.5	1405	55.3	646	25.5	4147	163.3	32	40	1800	3960	2.4	35	128		
11.2-38		8	10.0		284	11.2	1465	57.7	693	27.2	4343	171.0	31	38	1320	2900	2.4	35	117		
		12			31	38	1550	3410	2.9	42	123										
12.4-38	8	11.0	315	12.4	1511	59.4	716	28.2	4496	177.0	34	43	1750	3850	2.3	33	127				
	12		34	43	2120	4664	2.8	41	134												

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

ALL TERRAIN TRACTION TYRES

- Traction patterns, designed for on and off- the-road use, in all weather conditions.
- Patterns are engineered to provide excellent traction to drive wheels and are suited for both implement and agriculture applications.



GRIPKING R-1

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED					
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph				
			inch																						
3.50-6	GRIPKING R-1	4	2.5	TT	101	4.0	345	13.5	214	8.4	1340	52.8	7	9	165	363	2.6	38	45	A8/40 Kmph	A8/25 mph				
3.50-8		4	2.5		101	4.0	372	14.6	218	8.6	1390	54.7	7	9	185	407	2.6	38	49						
4.80/4.00-8		4	3.0		114	4.4	425	16.7	195	7.7	1251	49.3	11	14	170	374	1.6	23	46						
3.50-10		4	2.5		101	4.0	440	17.3	205	8.1	1286	50.6	12	15	250	550	3.2	46	60						
4.00-10		4	3.0		110	4.3	466	18.3	217	8.5	1364	53.7	11	14	300	660	3.5	50	66						
4.50-10		4	3.5		130	5.1	483	19.0	227	8.9	1430	56.2	11	14	355	781	3.5	50	72						
5.00-10	GRIPKING R-1	4	4.0	TT	140	5.5	512	20.1	235	9.3	1508	59.4	10	13	400	880	3.7	53	76	A6/30 Kmph	A6/20 mph				
5.00-12		6	4.0		145	5.7	580	22.8	271	10.7	1731	68.1	13	16	265	583	3.2	54	62						
7.00-12		8	6.0		187	7.4	683	26.8	305	12.0	2007	79.0	17	21	560	1232	3.2	54	88						
6-14		4	5.0		157	6.1	655	26.0	305	12.0	1956	77.0	28	35	300	660	2.0	28	66						
		28											35	400	880	2.4	35	76							
		26											32	355	781	1.6	23	72							
7-14	GRIPKING R-1	4	6.0	TT	180	7.0	691	27.2	330	13.0	2057	81.0	26	32	412	906	1.8	25	77	A6/30 Kmph	A6/20 mph				
4.00-15		8											26	32	475	1045	2.1	30	82						
		4											3.0	115	4.5	615	24.2	284	11.2			1819	71.6	15	19
5.00-15	6	4.0	145	5.7	657	25.8	305	12.0	1956	77.0	17	21	475	1045	3.6	52	82	A6/30 Kmph	A6/20 mph						
6.5/80-15	8	5.0	163	6.4	663	26.1	310	12.2	1976	77.8	16	20	630	1386	4.8	72	92								
690x180-15	6	5.0	176	6.9	690	27.1	322	12.7	2055	80.9	14	17	925	2035	2.8	41	105								
7.5L-15	GRIPKING R-1	8	6.0	TT	210	8.2	795	31.2	356	14.0	2286	90.0	21	26	800	1760	3.6	51	100	A8/40 Kmph	A8/25 mph				
7.00-15		8	5.5		183	7.2	715	28.0	331	13.0	2126	83.7	21	26	1060	2332	3.6	51	110						
7.50-15		8	6.0		208	8.1	770	30.3	359	14.1	2308	90.9	21	26	1320	2904	3.1	45	118						
8.0/75-15		6	6.5		199	7.8	708	27.8	326	12.8	2093	82.4	20	25	1100	2420	3.5	49	112						
4.00-16		GRIPKING R-1	6		4.0	TT	115	4.5	640	25.2	308	12.1	1932	76.1	11	14	290	638	3.0			44	73	A8/40 kmph	A8/25 mph
4.50-16			6		4.0		122	4.8	655	25.8	311	12.2	1952	76.9	10	12	365	803	3.2			47	69		
5.00-16	6		4.0	150	5.9		710	27.9	330	13.0	2083	82.0	19	24	400	880	3.7	54	76						
6.00-16	8		4.5	170	6.6		745	29.3	330	13.0	2184	86.0	18	22	670	1474	4.1	60	94						
6.50-16	8	4.5	180	7.0	765	30.1	330	13.0	2184	86.0	22	27	750	2035	4.1	60	94	A8/40 kmph	A8/25 mph						
7-16	6	5.5	183	7.2	740	29.1	333	13.1	2205	86.8	18	22	500	1100	2.5	36	84								
7.50-16	8	5.5	190	7.5	810	31.9	381	15.0	2388	94.0	18	22	1120	2464	3.1	45	112								
	18										22	1360	2992	4.3	62	119									
8-16	8	7.0	203	8.0	813	32.0	381	15.0	2362	93.0	24	30	1300	2860	1.9	27	118								
8.25-16	8	7.0	229	9.0	848	33.3	354	13.9	2540	100.0	21	26	1060	2332	2.1	30	110								
7.50-18	8	6.0	214	8.4	854	33.6	406	16.0	2540	100.0	17	21	1180	2596	3.0	44	114								

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

ALL TERRAIN TRACTION TYRES

- Broad lugs and deep tread suitable for better soil tillage.
- Excellent self cleaning properties.



GRIPKING HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD 	LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED						
					mm	inch	mm	inch	mm	inch	mm	inch		mm	32nds	kg	lbs		bar	psi	kmph	mph			
6.5/80-12	GRIPKING HD	6	5.0	TT	165	6.5	590	23.2	279	11.0	1753	69.0	17	21	710	1562	3.6	52	96	A8/40 Kmph	A8/25 mph				
6.5/80-13		6	5.0	TT	170	6.7	640	25.1	279	11.0	1753	69.0	16	20	750	1650	3.4	50	98	A6/30 kmph	A6/20 mph				
10.0/75-15.3		10	9.0	TL	267	10.5	780	30.7	356	14.0	2286	90.0	26	32	1550	3410	3.9	57	123	A8/40 Kmph	A8/25 mph				
14		26																				32	1900	4180	5.4
11.5/80-15.3		10	9.0	TL	290	11.4	867	34.1	381	15.0	2540	100.0	24	30	1950	4290	4.4	64	131			A8/40 kmph	A8/25 mph		
14		24																						30	2430
9.0/70-16		GRIPKING HD	10	8.0	TL	226	8.8	745	29.3	354	13.9	2540	100.0	25	31	1350	2970	4.3	62	119	A8/40 kmph	A8/25 mph			
9.0/75-16			10	8.0		229	9.0	774	30.4	355	14.0	2545	100.2	25	31	1390	3058	4.4	64	120					
250/80-16			10	8.0		TL	240	9.4	816	32.1	369	14.5	2412	95.0	25	31	1460	3212	3.0	44			121	A8/40 kmph	A8/25 mph
14			25																						
260/70-16	10		8.0	TL		257	10.1	775	30.5	356	14.0	2550	100.4	25	31	1030	2266	2.3	34	109			A8/40 kmph	A8/25 mph	
14	25																								31
280/70-16	10		9.0	TL		280	11.0	807	31.7	357	14.1	2560	100.8	25	31	1120	2464	2.4	34	112			A8/40 kmph	A8/25 mph	
14	25																								31
9.5-16	GRIPKING HD		8	7.0		TT	241	9.4	840	33.3	358	14.1	2565	101.0	26	32	1100	2420	2.1	30			112	A8/40 kmph	A8/25 mph
15.0/55-17			10	13.0		TL	380	14.9	872	34.3	377	14.8	2490	98.0	23	29	2120	4664	3.5	51			134		
14		23	29		2575																5665	4.9			
19.0/45-17	GRIPKING HD	14	16.0	TL	491	19.3	875	34.4	381	15.0	2565	101.0	27	34	3000	6600	3.8	55	146	A8/40 kmph	A8/25 mph				
18		27																				34	3550	7810	4.1
400/55-17.5		14	13.0	TT/TL	400	15.7	800	31.5	390	15.3	2585	101.8	23	29	2900	6380	3.6	52	144						
8-18		6	6.0	TT	203	8.0	840	33.0	381	15.0	2515	99.0	21	26	615	1353	1.9	27	91						
10.5/80-18	10	9.0	TL	274	10.7	907	35.7	406	16.0	2667	105.0	24	30	1950	4290	3.6	52	131							
11.5/80-18	GRIPKING HD	UNDER DEVELOPMENT																							
12.5/80-18	GRIPKING HD	12	9.0	TL	308	12.1	987	38.8	432	17.0	2896	114.0	24	30	2650	5830	3.6	52	142	A8/40 kmph	A8/25 mph				
250/80-18		10	8.0		251	9.9	857	33.7	406	16.0	2667	105.0	24	30	1600	3520	3.7	54	124						
14		24			30	1900	4180	4.0	58	130															
275/80-18		10	8.0		275	10.8	906	35.6	406	16.0	2667	105.0	24	30	1650	3630	3.7	54	125						
14		24																				30	1900	4180	3.8
280/70-18		10	9.0		280	11.0	849	33.4	406	16.0	2667	105.0	24	30	1180	2595	2.3	34	114						
14	24	30		1950																4290	3.8	55	131		
6.50-20	GRIPKING HD	8	4.5	TT	175	6.8	865	34.0	409	16.1	2578	101.5	16	20	825	1815	2.8	41	101	A6/30 kmph	A6/20 mph				
7.50-20		8	6.0		214	8.4	904	35.5	432	17.0	2692	106.0	21	27	1360	2992	3.2	46	119						
9.5-20		8	7.0		241	9.5	955	37.6	449	17.7	2942	115.8	27	34	975	2145	2.8	41	107						
16.0/70-20		10	14.0		TL	418	16.4	1097	43.1	483	19.0	3226	127.0	29	36	3075	6765	3.4	50			147			
14	29	36		3750																8250	4.8		70	154	

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

ALL TERRAIN TRACTION TYRES

- Ideal for soil tillage on muddy ground.
- Deeper lugs provide excellent traction and self cleaning properties.



GRIPKING R-1 HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
5-12 (5.00-12)	GRIPKING R-1 HD	6	4.0	TT	145	5.7	580	22.8	271	10.7	1731	68.1	21	26	265	583	3.3	48	62	A6/30 Kmph	A6/20 mph
6-12 (6.00-12)					153	6.0	585	23.0	276	10.9	1735	68.3	17	21	345	759	2.5	36			

FARM & HIGHWAY SERVICE (DOT)

IMPLEMENT TYRES

- Offers D.O.T. compliance for approved operation at highway speeds.
- Noted for its great handling and towing characteristics.



FHS

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED		
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph	
9.5L-15FI	FHS	FPLY	7.0	TL	249	9.8	767	30.2	343	13.5	2260	89	11	14	1580	3476	6.2	90	124	J/100 kmph	J/60 mph	
11-15LT			8.0		266	10.5	790	31.1	353	13.9	2336	92	11	14	1800	3960	6.2	90				128
12.5-15LT			10.0		325	12.8	838	33.0	368	14.5	2464	97	11	14	2120	4664	6.2	90				134







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

AGRICULTURAL IMPLEMENT TYRES

- Low section implement tyres offering high load capacity with minimum soil compaction.
- Ideal tyres for modern farming, suitable for both on and off-the road applications.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.5L-14	I-1	8	7.0	TL	240	9.4	735	28.9	330	13.0	2159	85.0	7	9	1090	2400	3.0	43	111	D/65 kmph	D/40 mph
		12											7	9	1360	2990	3.6	52	119		
11L-14	I-1	8	8.0	TL	274	10.8	746	29.4	333	13.1	2209	87.0	8	10	1120	2464	2.4	35	112	D/65 kmph	D/40 mph
		12											8	10	1250	2750	3.3	48	116		
5.90-15	I-1	4	4.5	TL	152	6.0	657	25.9	295	11.6	1955	77.0	8	10	530	1166	2.5	36	86	D/65 kmph	D/40 mph
6.70-15		6	4.5										6	8	730	1605	3.0	44	97		
7.60-15	I-1	8	5.5	TL	190	7.5	718	28.3	325	12.8	2184	86.0	7	9	800	1760	2.8	51	100	D/65 kmph	D/40 mph
9.5L-15		8	7.0										11	14	1090	2400	3.0	44	111		
11L-15	I-1	12	8.0	TL	270	10.6	770	30.3	330	13.0	2261	89.0	11	14	1320	2904	3.6	52	118	D/65 kmph	D/40 mph
		8											9	11	1150	2530	2.5	36	113		
12.5L-15	I-1	20	10.0	TL	310	12.2	818	32.2	356	14.0	2413	95.0	9	11	1360	2992	3.0	44	119	D/65 kmph	D/40 mph
		8											10	12	1360	2990	5.2	75	131		
31x13.50-15	I-1	12	10.0	TL	347	13.7	779	30.7	351	13.8	2134	84.0	10	12	1750	3850	3.5	51	127	D/65 kmph	D/40 mph
		8											10	12	2240	4928	4.5	65	136		
6.00-16	I-1	8	4.5	TL	165	6.5	720	28.3	335	13.2	2134	84.0	10	12	2725	5995	5.2	75	143	D/65 kmph	D/40 mph
6.50-16		10	4.5										10	12	1700	3740	4.0	57	126		
7.00-16	I-1	12	5.0	TL	180	7.1	715	28.1	348	13.7	2210	87.0	9	11	900	1980	3.0	43	104	D/65 kmph	D/40 mph
7.50-16		12	5.5										8	10	1215	2675	4.2	60	115		
9.00-16	I-1	12	6.0	TL	234	9.2	845	33.3	374	26.4	2475	97.5	10	12	1700	3740	4.0	57	126	D/65 kmph	D/40 mph
11L-16		8	8.0										8	10	1215	2675	2.5	36	115		
12.5L-16	I-1	8	10.0	TL	310	12.2	845	33.2	381	15.0	2464	97.0	9	11	1450	3190	2.7	40	121	D/65 kmph	D/40 mph
14L-16.1		12											10.0	9	11	1800	3960	3.5	51		
	16.5L-16.1	I-1	14	11.0	TL	355	14.0	927	36.5	419	16.5	2565	101.0	9	11	2000	4400	3.8	55	132	D/65 kmph
8			11											14	1750	3850	2.1	31	127		
19.5L-16.1	I-1	12	16.0	TL	490	19.3	1023	40.3	470	18.5	2921	115.0	11	14	2120	4665	3.0	44	134	D/65 kmph	D/40 mph
		10											13	16	2360	5192	2.5	36	138		
21.5L-16.1	I-1	14	18.0	TL	434	17.1	1023	40.3	455	17.9	2794	110.0	13	16	2725	5995	3.0	44	143	D/65 kmph	D/40 mph
		16											13	16	2900	6380	3.3	48	145		
19.5L-16.1	I-1	12	16.0	TL	490	19.3	1023	40.3	470	18.5	2921	115.0	13	16	2725	5995	2.2	31	143	D/65 kmph	D/40 mph
		14											13	16	2900	6380	2.5	36	145		
21.5L-16.1	I-1	10	18.0	TL	533	21.0	1102	43.4	490	19.3	3048	120.0	13	16	3000	6600	1.9	27	146	D/65 kmph	D/40 mph
		14											13	16	3450	7790	2.2	32	151		
21.5L-16.1	I-1	16	18.0	TL	533	21.0	1102	43.4	490	19.3	3048	120.0	13	16	3600	7920	2.5	36	153	D/65 kmph	D/40 mph
		14											13	16	3600	7920	2.5	36	153		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

AGRICULTURAL IMPLEMENT TYRES

- Ideally designed for implement and trailers.
- Special tread compound ensures extended product life.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED			
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph		
7.00-12	PK-303	8	4.25	TL	185	7.3	665	26.2	305	12.0	1956	77.0	8	10	825	1815	3.7	53	101	A8/40 kmph	A8/25 mph		
		10											10	925	2035	4.0	58	105					
10.0/80-12		8	9.0		264	10.4	710	28.0	305	12.0	2083	82.0	11	14	1250	2750	4.1	60	116				
		10											14	1450	3200	5.4	78	121					
23x10.50-12		10	8.50		260	10.0	585	23.0	262	11.0	1697	69.0	13	16	975	2145	2.6	38	107				
10.0/75-15.3	PK-303	10	9.0	TL	264	10.4	760	29.9	356	14.0	2235	88.0	9	11	1550	3410	5.2	75	123	A8/40 kmph	A8/25 mph		
		12											11	1700	3750	6.4	93	126					
		14											11	1900	4180	6.9	101	130					
		18											11	2360	5200	7.1	103	138					
		22											11	2750	6050	7.5	108	144					
11.5/80-15.3	PK-303	10	9.0	TL	290	11.4	845	33.2	381	15.0	2464	97.0	11	14	1950	4290	4.5	65	131	A8/40 kmph	A8/25 mph		
		12											14	2180	4800	4.6	66	135					
		14											14	2430	5346	6.5	94	139					
		16											14	2575	5675	7.1	103	141					
		18											14	2725	5995	7.2	105	143					
		22											14	2900	6380	7.6	110	145					
12.5/80-15.3	PK-303	14	9.0	TL	315	12.4	890	35.0	381	15.0	2591	102.0	12	15	2650	5825	4.3	62	142	A8/40 kmph	A8/25 mph		
		16											15	2800	6160	5.4	78	144					
		18											15	3450	7590	6.3	89	151					
		12											15	2060	4540	4.8	69	133					
280/60-15.5		14	9.0		280	11.0	730	28.7	381	15.0	2565	101.0	9	11	1800	3960	4.0	57	128	A8/40 kmph	A8/25 mph		
340/55-16		14	11.0		336	13.2	770	30.3	345	13.6	2255	88.8	11	14	2240	4928	5.8	84	136				
10.5/65-16	PK-303	10	9.0	TL	274	10.8	755	29.7	356	14.0	2210	87.0	9	11	1550	3410	5.3	75	123	A8/40 kmph	A8/25 mph		
		14											11	1900	4180	7.1	104	130					
280/70-16			10		9.0		280	11.0	780	30.7	363	14.3	2250	88.6	9	11	1250	2750	2.4			34	116
13.0/55-16			10		11.0		336	13.2	770	30.3	356	14.0	2261	89.0	12	15	1850	4070	4.1			60	129
13.0/70-16	PK-303	10	11.0	TL	336	13.2	770	30.3	356	14.0	2261	89.0	12	15	2060	4540	4.8	69	133	A8/40 kmph	A8/25 mph		
		14											15	2240	4928	5.7	82	136					
		10											12	2360	5200	4.1	59	138					
14		12	2841		6263	5.7	82	144															
14.0/65-16			14		11.0		353	13.9	871	34.3	381	15.0	2540	100.0	11	14	2900	6380	5.5			80	145
360/70-16			-		11.0		362	14.0	905	36.0	380	16.0	2697	110.0	10	13	2300	5060	2.4			35	137
10.5/80-18	PK-303	10	9.0	TL	275	10.8	885	35.0	406	16.0	2591	102.0	11	14	1950	4290	3.8	55	131	A8/40 kmph	A8/25 mph		
		12											16	2650	5830	4.8	70	142					
		16											16	3350	7370	5.5	80	150					
13.0/65-18			16		11.0		336	13.2	890	35.0	406	16.0	2616	103.0	11	14	2800	6160	6.7			97	144
340/70-18 (12.0-18)		18	11.0		342	13.5	902	35.5	410	16.1	2642	104.0	11	14	3650	8030	7.4	107	153	A8/40 kmph	A8/25 mph		
		16	11.0		342	13.5	902	35.5	410	16.1	2642	104.0	10	12	3650	8050	7.2	103	153				

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

AGRICULTURAL IMPLEMENT TYRES

- Specially developed for soil tillage and transport applications .
- Provides maximum handling comfort.
- Minimum soil compaction.



PK-305

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
400/60-15.5	PK-305	10	13.0	TL	404	15.9	874	34.4	381	15.0	2565	101.0	11	14	2240	4928	3.5	51	136	A8/40 kmph	A8/25 mph
		14											2900	6380	3.4	50	145				
		18											3250	7150	4.4	64	149				
15.0/55-17	PK-305	10	13.0	TL	391	15.4	850	33.5	381	15.0	2489	98.0	10	12	2120	4664	3.5	51	134	A8/40 kmph	A8/25 mph
		14											2575	5675	4.9	71	141				
		18											3250	7165	6.5	94	149				

AGRICULTURAL IMPLEMENT TYRES

- Specially developed for soil tillage and transport applications .
- Provides maximum handling comfort.
- Minimum soil compaction.



PK-307

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
19.0/45-17	PK-307	14	16.0	TL	491	19.3	870	34.3	381	15.0	2540	100.0	11	14	2800	6160	2.8	51	144	A8/40 kmph	A8/25 mph
		18											3150	6930	4.3	62	148				
		22											3550	7810	3.9	56	152				
500/50-17	PK-307	14	16.0	TL	503	19.8	945	37.2	381	15.0	2490	98.0	12	16	3550	7810	3.8	55	152	A8/40 kmph	A8/25 mph
		18											4125	9075	4.7	68	157				

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Reduce soil compaction.



IMP-03

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi	kmph	mph	
260/70R-15.3 134 A8/B	IMP-03	9.0	-	TL	264	10.4	760	30.0	344	13.6	2304	90.7	10	13	2120	4664	2120	4664	6.0	87	134	A8/40 kmph	A8/25 mph

STEEL BELTED RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Cut and puncture resistant.
- Steel belt ensure enhanced durability.



IMP-03

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi	kmph	mph	
260/70R-15.3 134 A8/B	IMP-03	9.0	-	TL	264	10.4	760	30.0	344	13.6	2304	90.7	10	13	2120	4664	2120	4664	6.0	87	134	A8/40 kmph	A8/25 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Reduce soil compaction.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi			
425/55R-17 129 D/140 A8	FL-60	13.0	-	TL	420	16.6	894	35.2	397	15.6	2704	106.5	15	19	2500	5500	1850	4070	4.0	58	140	D/65 kmph	D/40 mph
500/50R-17 146 D/149 A8		16.0	-		503	19.8	932	36.7	424	16.7	2913	114.7	15	19	3520	7744	3000	6600	5.0	73	149		

STEEL BELTED RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Cut and puncture resistant.
- Steel belt ensure enhanced durability.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		65 kmph / 40 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi			
425/55R-17 129 D/140 A8	FL-60	13.0	-	TL	420	16.6	894	35.2	397	15.6	2704	106.5	15	19	2500	5500	1850	4070	4.0	58	140	D/65 kmph	D/40 mph
500/50R-17 146 D/149 A8		16.0	-		503	19.8	932	36.7	424	16.7	2913	114.7	15	19	3520	7744	3000	6600	5.0	73	149		







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

AGRICULTURAL IMPLEMENT TYRES

- Ideal for modern and suitable for on and off the road application.
- Low section implement tyre.



RIB-777







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
300/65-12	RIB-777	8	9.0	TL	305	12.0	685	27.0	305	12.0	2007	79.0	9	11	1500	3300	3.6	51	122	A8/40 kmph	A8/25 mph
200/60-14.5		10	6.8		210	8.3	610	24.0	279	11.0	1778	70.0	10	12	1030	2270	6.9	100	109		
250/65-14.5		14			260	10.2	694	27.3	303	12.0	1978	77.9	11	14	1550	3410	6.5	92	123		

AGRICULTURAL IMPLEMENT TYRES

- Ideal for trenchers and implement machinery.
- Large contact area provides high traction.



TRENCHER

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x10.50-12	TRENCHER	6	8.5	TL	264	10.4	574	22.6	262	10.3	1697	66.8	16	20	775	1705	2.2	32	99	A3/15 kmph	A3/9 mph
26x12.00-12		14											18	22	1000	2200	3.5	50	108		
29x12.50-15	TRENCHER	8	10.0	TL	310	12.2	745	29.3	320	12.6	1950	76.8	18	22	1285	2827	3.0	43	117	A4/20 kmph	A4/12mph
		12											18	22	1600	3520	4.4	64	124		
31x15.50-15	TRENCHER	10	13.0	TL	394	15.5	795	31.3	358	14.0	2362	93.0	15	19	975	2145	2.8	40	107		
		10											24	30	1450	3190	3.5	50	121		






* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

FORESTRY TYRES






- Excellent for both Heavy Duty Agricultural and forestry applications which ensures good all-round performance in Forestry usage as well as good traction Load Capability and Durability in Agricultural / Forestry operations.
- Developed for use on powerful forestry Tractors / Machinery.
- Deep Tread lugs mean high traction at the work area.
- Long service life thanks to the use of a wear resistant tread compound.



GRIPKING HD

24"	SIZE	RIM WIDTH  (inch)	TYPE	UNLOADED DIMENSION		STATIC LOADED RADIUS 	ROLLING CIRCUM ± 2.5 % 	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION																
				SW 	OD 						SPEED KPH / MPH RECOMMENDED LOAD KG / LBS																
				(mm) (inch)	(mm) (inch)						DRIVE WHEEL					FORESTRY USE											
				STATIC	10 6						20 12	30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT											
11.2-24	DW10 W10 W10H	TUBETYPE	284 11.2	1112.0 43.8	518 20.4	3346 131.7	14PR	2.0 29.0	29 36	2460	1610	1190	1140	1070	970	1070	1320										
										5420	3550	2620	2510	2360	240	2360	2900										
										2600	1700	1250	1210	1130	1030	1130	1390										
										5730	3740	2750	2670	2490	2270	2490	3060										
										5730	3740	2750	2670	2490	2270	2490	3060										
										2740	1790	1320	1270	1190	1080	1190	1460										
										6040	3940	2910	2800	2620	2380	2620	3220										
										2880	1880	1390	1340	1250	1140	1250	1540										
										6340	4140	3060	2950	2750	2510	2750	3380										
										3010	1970	1450	1400	1310	1190	1310	1610										
										6630	4340	3190	3080	2890	2620	2890	3550										
										3130	2040	1510	1460	1360	1240	1360	1670										
										44.0	6890	4490	3330	3220	3000	2730	3000	3690									
										12.4-24	DW11 W11 DW10 W10	TUBETYPE	315 12.4	1175.0 46.3	524 20.6	3407 134.1	16PR	2.5 36.0	30 37	3400	2220	1640	1580	1480	1350	1480	1820
7490	4890	3610	3480	3260	2970	3260	4010																				
3570	2330	1720	1660	1550	1410	1550	1910																				
7860	5130	3790	3660	3410	3110	3410	4190																				
3700	2420	1790	1720	1610	1470	1610	1980																				
8150	5330	3940	3790	3550	3240	3550	4370																				
3860	2520	1860	1800	1680	1530	1680	2070																				
8500	5550	4100	3960	3700	3370	3700	4550																				
4000	2610	1930	1860	1740	1580	1740	2140																				
8810	5750	4250	4100	3830	3480	3830	4710																				
4140	2700	2000	1930	1800	1640	1800	2210																				
9120	5950	4410	4250	3960	3610	3960	4870																				
13.6-24	DW12 W12 W11	TUBETYPE	345 13.6	121.0 47.6	542 21.3	3531 139.0	16PR	1.5 22.0	30 37											3080	2010	1490	1430	1340	1220	1340	1650
																				6780	4430	3280	3150	2950	2690	2950	3630
										3310	2160	1600	1540	1440	1310	1440	1770										
										7290	4760	3520	3390	3170	2890	3170	3900										
										3520	2300	1700	1640	1530	1390	1530	1880										
										7750	5070	3740	3610	3370	3060	3370	4150										
										3750	2450	1810	1740	1630	1480	1630	2000										
										8260	5400	3990	3830	3590	3260	3590	4420										
										3930	2570	1900	1830	1710	1560	1710	2100										
										8660	5660	4190	4030	3770	3440	3770	4640										
										4140	2700	2000	1930	1800	1640	1800	2240										
										9120	5950	4410	4250	3960	3610	3960	4930										
										14.9-24	DW 3 W13	TUBETYPE	378 14.9	1245 49.0	562 22.1	3673 144.6	16PR	1.5 22.0	33 41	3610	2360	1740	1680	1570	1430	1570	1930
																				7950	5200	3830	3700	3460	3150	3460	4260
3890	2540	1880	1810	1960	1540	1690	2080																				
8570	5990	4140	3990	3720	3390	3720	4580																				
4160	2720	2010	1940	1810	1650	1810	2230																				
9160	5990	4430	4270	3990	3630	3990	4910																				
4420	2880	2130	2050	1920	1750	1920	2360																				
9740	6340	4690	4520	4230	3850	4230	5200																				
4880	3180	2350	2270	2120	1930	2120	2610																				
10750	7000	5180	5000	4670	4250	4670	5740																				
5430	3540	2620	2530	2360	2150	2360	2900																				
44.0	11960	7800	5770	5570	5200	4740	5200	6400																			

undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

SIZE	RIM WIDTH  (inch)	TYPE	UNLOADED DIMENSION		STATIC LOADED RADIUS 	ROLLING CIRCUM $\pm 2.5\%$ 	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION									
			SW 	OD 						SPEED KPH / MPH						RECOMMENDED LOAD KG / LBS			
			(mm) (inch)	(mm) (inch)	DRIVE WHEEL					FORESTRY USE									
					10	20				30	40	50	10*HT	10*LT					
					6	12				19	25	31	6*HT	6*LT					
26"	18.4-26 W16L W15L	TUBETYPE	467	1440	656	4273	16PR	1.1	41	4050	2640	1950	1880	1760	1600	1760	2160		
			18.4	56.7	25.8	168.2		16.0	51	8920	5810	4300	4140	3880	2520	3880	4770		
										1.3		4490	2930	2160	2090	1950	1770	1950	2400
										19.0		9890	6450	4760	4600	4300	3900	4300	5290
										1.5		4850	3170	2340	2260	2110	1920	2110	2600
										22.0		10680	6980	5150	4980	4650	4230	4650	5720
										1.7		5254	3420	2530	2440	2280	2070	2280	2800
										25.0		1150	7530	5570	5370	5020	4560	5020	6170
										1.9		5590	3650	2700	2600	2430	2210	2430	2990
										28.0		12310	8040	5950	5730	5350	4870	5350	6580
										3.0		5920	3860	2860	3650	2575	2340	2575	3170
										44.0		13040	8500	6300	8030	5670	5150	5670	6970
			28"	13.6-28 DW12 W12 W12D	TUBETYPE	345	1320	596	3863	16PR	1.5	38	3240	2120	1570	1510	1410	1280	1410
13.6	51.9	23.4				152.1		22.0	48	7140	4670	3460	3330	3110	2820	3110	3830		
										1.7		3500	2280	1690	1630	1520	1380	1512	1870
										25.0		7710	5020	3720	3590	3350	3040	3350	4120
										1.9		3730	2430	1800	1730	1620	1470	1620	1990
										28.0		8220	5350	3960	3810	3570	3240	3570	4390
										2.1		3960	2580	1910	1840	1720	1570	1720	2120
										30.0		8720	5680	4210	4050	3790	3460	3790	4660
										2.3		4160	2720	2010	1940	1810	1650	1810	2230
										33.0		9160	5990	4430	4270	3990	3630	3990	4910
										2.5		4370	2850	2110	2030	1900	1730	1900	2340
										36.0		9630	6280	4650	4470	4190	3810	4190	5150
	14.9-28 DW13 W13 W12D W12	TUBETYPE				378	1365	618	4019	16PR	1.5	34	3840	2510	1850	1790	1670	1520	1670
			14.9	53.7	24.3	158.2		22.0	42	8460	5530	4070	3940	3680	3350	3680	4530		
										1.7		4120	2690	1990	1920	1790	1630	1790	2200
										25.0		9070	5930	4380	4230	3940	3590	3940	4850
										1.9		4390	2870	2120	2040	1910	1740	1910	2350
										28.0		9670	6320	4670	4490	4210	3830	4210	5180
										2.1		4670	3050	2250	2170	2030	1850	2030	2500
										30.0		10290	6720	4960	4780	4470	4070	4470	5500
										2.5		5180	3380	2500	2410	2250	2050	2250	2770
										36.0		11410	7440	5510	5310	4960	4520	4960	6100
										3.0		5750	3750	2780	2680	2500	2280	2500	3080
										44.0		12670	8260	6120	5900	5510	5020	5510	6775
				16.9-28 DW15L W15 W14L DW14	TUBETYPE	429	1440	645	4207	16PR	1.5	39	4740	3090	2290	2200	2060	1870	2060
16.9	56.7	25.4				165.6		22.0	49	10440	6810	5040	4850	4540	4120	4540	5580		
										1.7		5080	3320	2450	2360	2210	2010	2210	2720
										25.0		11190	7310	5400	5200	4870	4430	4870	5990
										1.9		5430	3540	2620	2530	2360	2150	2360	2900
										28.0		11960	7800	5770	5570	5200	4740	5200	6400
										2.1		5750	3750	2780	2680	2500	2280	2500	3080
										30.0		12670	8260	6120	5900	5510	5020	5510	6780
										2.5		6370	4160	3070	2960	2770	2520	2770	3410
										36.0		14030	9160	6760	6520	6100	5550	6100	7500
										2.7		6670	4350	3220	3100	2900	2640	2900	3570
										39.0		14690	9580	7090	6830	6390	5810	6390	7860
30"	16.9-30 DW15L W15 W14L DW14	TUBETYPE				429	1485	684	4426	16PR	2.0	41	5800	3780	2800	2700	2520	2990	2520
			16.9	58.5	26.9	174.3		29.0	51	12780	8330	6170	5950	5550	5040	5550	6830		
										2.2		6120	3990	2950	2850	2660	2420	2660	3270
										32.0		13480	8790	6500	6280	5860	5330	5860	7210
										2.4		6440	4200	3110	3000	2800	2550	2800	3440
										35.0		14190	9250	6850	6610	6170	5620	6170	7590
										2.7		6900	4500	3330	3210	3000	2730	3000	3690
										39.0		15200	9910	7330	7070	6610	6010	6610	8130

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

30"	18.4-30	W16L DW16L W15L DW15L	TUBETYPE	UNLOADED DIMENSION		STATIC LOADED RADIUS	ROLLING CIRCUM ± 2.5 %	PLY RATING	INFLATION PRESSURE	NSD	CONSTANT LOAD APPLICATION							
				SW	OD						SPEED KPH / MPH							
				(mm)	(mm)						RECOMMENDED LOAD KG / LBS							
				(inch)	(inch)						DRIVE WHEEL				FORESTRY USE			
				(mm)	(mm)						STATIC	10	20	30	40	50	10*HT	10*LT
				467	1560	712	4618	16PR	1.6	39	5980	3900	2890	2780	2600	2370	2600	3200
				18.4	61.4	28.0	181.8		23.0	49	13170	8590	6370	6120	5730	5220	5730	7050
									1.8		6390	4170	3090	2970	2780	2530	2780	3420
									26.0		14070	9190	6810	6540	6120	5570	6120	7530
									2.0		6810	4440	3290	3170	2960	2690	2960	3640
									29.0		15000	9780	7250	6980	6520	5930	6520	8020
									2.2		7200	4700	3470	3550	3130	2850	3130	3850
									32.0		15860	10350	7640	7380	6890	6280	6890	8470
									2.4		7570	4940	3650	3520	3290	2990	3290	4050
									35.0		16670	10880	8040	7750	7250	6590	7250	8920
									2.6		7940	5180	3830	3690	3450	3140	3450	4240
									38.0		17490	11410	8440	8130	7600	6290	7600	9350
34"	16.9-34	DW15 W15L W14L	TUBETYPE	429	1590	722	4693	16PR	1.5	36	5130	3350	2480	2390	2230	2030	2230	2740
				16.9	62.6	28.4	184.8		22.0	45	11300	7380	5460	5260	4910	4470	4910	6040
									1.7		5500	3590	2650	2560	2390	2170	2390	2940
									25.0		12110	7910	5840	5640	5260	4780	5260	6470
									1.9		5890	3840	2840	2740	2560	2330	2560	3150
									28.0		12970	8460	6260	6040	5640	5130	5640	6940
									2.1		6230	4070	3010	2900	2710	2470	2710	3330
									30.0		13720	8960	6630	6390	5970	5440	5970	7340
									2.3		6580	4290	3170	3060	2860	2600	2860	3520
									33.0		14490	9450	6980	6740	6300	5730	6300	7750
					2.5		6900	4500	3330	3210	3000	2730	3000	3690				
					36.0		15200	9910	7330	7070	6610	6010	6610	8130				
	18.4-34	W16L DW16 W15L DW15L	TUBETYPE	467	1671	750	4914	16PR	1.5	39	6390	4170	3090	2970	2780	2530	2780	3420
				18.4	65.8	29.5	193.5		22.0	49	14070	9190	6810	6540	6120	5570	6120	7530
									1.7		6880	4490	3320	3200	2990	2720	2990	3680
									25.0		15150	9890	7310	7050	6590	5990	6590	8110
									1.9		7340	4790	3540	3410	3190	2900	3190	3920
									28.0		16170	10550	7800	7510	7030	6390	7030	8650
									2.1		7800	5090	3760	3630	3390	3080	3390	4170
									30.0		17180	11210	8280	8000	7470	6780	7470	9190
									2.3		8210	5360	3960	3820	3570	3250	3570	4390
									33.0		18080	11810	8270	8410	7860	7160	7860	9670
					2.5		8630	5630	4160	4010	3750	3410	3750	4610				
					36.0		19010	12400	9160	8830	8260	7510	8260	10160				
38"	16.9-38	W15L DW15 W14L	TUBETYPE	429	1675	772	5007	16PR	1.6	41	5640	3680	2720	2620	2420	2230	2450	3010
				16.9	65.9	30.4	197.1		23.0	51	12420	8110	5990	5770	5400	4910	5400	6640
									1.8		6030	3930	2910	2800	2620	2380	2620	3220
									26.0		13280	8660	6410	6170	5770	5240	5770	7100
									2.0		6420	4190	3100	2990	2790	2540	2790	3430
									29.0		14140	9230	6830	6590	6150	5590	6150	7560
									2.2		6790	4430	3270	3160	2950	2680	2950	3630
									32.0		14960	9760	7200	6960	6500	5900	6500	8000
									2.4		7130	4650	3440	3320	3100	2820	3100	3810
									35.0		15700	10240	7580	7310	6830	6210	6830	8400
					2.6		7480	4880	3610	3480	3250	2960	3250	4000				
					38.0		16480	10750	7950	7670	7160	6520	7160	8810				
	18.4-38	W16L 16DD W16A DW15L	TUBETYPE	467	1768	813	5217	16PR	1.5	39	6600	4310	3190	3070	2870	2610	2870	3530
				18.4	69.6	31.6	205.4		22.0	49	14540	9490	7030	6760	6320	5750	6320	7770
									1.7		7110	4640	3430	3310	3090	2810	3090	3800
									25.0		15660	10220	7560	7290	6810	6190	6810	8380
									1.9		7590	4950	3660	3530	3300	3000	3300	4060
									28.0		16720	10900	8060	7780	7270	6610	7270	8940
									2.1		8050	5250	3890	3750	3500	3191	3500	4310
									30.0		17730	11560	8570	8260	7710	7030	7710	9480
									2.3		8490	5540	4100	3950	3690	3360	3690	4540
									33.0		18700	12200	9030	8700	8130	7400	8130	10000
					2.5		8910	5810	4300	4150	3875	3530	3875	4770				
					36.0		19630	12800	9470	9140	8540	7780	8540	10500				

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

GOLF CART TYRES

- Specially designed for golf cart.
- Ensures best comfort and ground protection.



POWER PLUS

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
205/60-8 (18x8.50-8)	POWER PLUS	6	5.5	TL	216	8.5	460	18.1	202	8.0	1334	52.5	8	10	475	1045	2.2	32	82	A4/20 kmph	A4/12 mph
		10											8	10	568	1250	3.9	56			

GOLF CART TYRES

- Specially designed for golf cart.
- Specific tread pattern helps to prevent turf damages.



BME-01

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
205/60-8 (18x8.50-8)	BME-01	4	6.5 J	TL	205	8.1	453	17.8	191	7.5	1343	52.9	6	7	325	715	2.2	32	69	J/100 kmph	J/62 mph

GOLF CART / LAWN MOWER TYRES

- Specially designed for golf cart.
- Ensures best comfort and ground protection.
- Extra deep tread.



GC-007









SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
205/50-10	GC-007	6	7.0	TL	216	8.5	460	18.1	202	8.0	1360	53.5	8	10	460	1012	3.2	32	63	A6/30 kmph	A6/20 mph

GOLF CART TYRES

- Suitable for golf cart applications.
- Specially Tread design makes a tyre gentle on the ground and ensures easy handling.



POWER PLUS HD









SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD 		LOAD CAPACITY 		INFLATION PRESSURE 		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
20.5x8.00-10	POWER PLUS HD	10	6.0	TL	203	8.0	528	20.8	223	8.8	1450	57.1	9	11	705	1550	5.9	85	96	A4/20 kmph	A4/12 mph
		12											9	11	800	1760	6.2	90	100		
10		6.5	221		8.7	546	21.5	254	10.0	1560	61.4	8	10	1150	2530	6.2	90	113			
12												8	10	1215	2673	6.9	100	115			

LAWN MOWER TYRES

- Suitable for mowers.
- Special tread compound ensures better performance.
- Extra deep tread.



T-01

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD 		LOAD CAPACITY 		INFLATION PRESSURE 		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x10.50-12	T-01	6	8.5	TL	254	10.0	589	23.2	262	10.3	1697	66.8	10	12	690	1518	1.8	26	95	A4/20 kmph	A4/12 mph
		14											10	12	1120	2464	3.0	44	112		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

LAWN & GARDEN TYRES

- Suitable for lawn and garden applications.
- Provides excellent stability in all field conditions.



AVANTI

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
2.80/2.50-4	AVANTI	4	2.0	TT	69	2.7	218	8.6	103	4.1	661	26.0	4	5	95	209	1.4	20	26	A3/15 kmph	A3/9 mph

LAWN & GARDEN TYRES

- Gentle on the ground and protects the field from damages.
- Specially designed tread pattern ensure easy handling.



SUPERGRIP

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
3.00-4	SUPER GRIP	4	2.0	TT	85	3.3	259	10.2	122	4.8	783	30.8	4	5	110	242	1.6	23	32	A3/15 kmph	A3/9 mph

LAWN & GARDEN TYRES

- Suitable for lawn and garden applications..
- Ensures long product life.



VENUS







SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.10/3.50-4	VENUS	4	3.0		105	4.1	279	11.0	132	5.2	847	33.3	4	5	160	352	1.6	23	44	A3/15 kmph	A3/9 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

LAWN & GARDEN TYRES

- Unmatched stability, durability and puncture resistance.
- Strong sidewall and enhance service life.







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
13x5.00-6	TRACKING	4	3.5	TL	130	5.1	317	12.5	145	5.7	943	37.1	5	6	200	440	2.8	40	52	A4/20 kmph	A4/12 mph
15x6.00-6		6 10	4.5		155	6.1	366	14.4	160	6.3	1059	41.7	6	7	335	737	3.1	45	70		
16x6.50-8	TRACKING	6	5.0	TL	170	6.7	406	16.0	182	7.2	1183	47.0	6	7	355	780	2.8	41	72	A3/15 kmph	A3/9 mph
		10											6	7	430	950	3.9	56	78		

SPORTS GROUND TYRES

- Unique tyres specifically designed for sports ground.
- Suitable for soccer, cricket, baseball and hockey grounds.







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.00-8	FIELD STAR	4	3.75	TL	122	4.8	420	16.6	-	-	305	670	2.8	40	56	A8/40 kmph	A8/25 mph

MOUNTAIN TYRES

- Unique tyres specifically designed for hilly terrain usage.
- Suitable for farming on steep mountains.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
330/55-12	MT-777	4	10.6	TL	340	13.4	655	25.8	55	69	360	790	2.1	30	72	A6/30 kmph	A6/20 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL / OTR TYRES



RADIAL INDUSTRIAL TYRES

- Suitable for backhoe loader.
- Provide great traction in drive wheels.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
460/70R-24 17.5L R-24 159 A8/B	IND-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	41	51	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph
500/70R-24 19.5L R-24 164 A8/B		DW 16L	DW 15L DW 18L		485	19.1	1321	52.0	584	23.0	3950	155.5	43	53	5000	11000	5000	11000	4.0	58	164		

STEEL BELTED RADIAL INDUSTRIAL TYRES

- Suitable for backhoe loader.
- Provide great traction in drive wheels.
- Extra strength and stability.
- Special tread compound for cut and heat resistance.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
																kg	lbs	kg	lbs				
460/70R-24 17.5L R-24 159 A8/B	IND-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	41	51	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph
500/70R-24 19.5L R-24 164 A8/B		DW 16L	DW 15L DW 18L		485	19.1	1321	52.0	584	23.0	3950	155.5	43	53	5000	11000	5000	11000	4.0	58	164		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

RADIAL INDUSTRIAL TYRES

- Made for Agro / Industrial applications.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tire life.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED		
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph	
340/80R-18 12.5L R-18 143 A8/B	MP-70	W 11	W 10	TL	345	13.8	1005	39.6	460	18.1	3025	119.1	34	43	2725	5995	2725	5995	4.0	58	143	B/50 kmph	B/30 mph	
340/80R-20 12.5L R-20 144 A8/B		11	W 10 W 11		345	13.8	1050	41.3	480	18.9	3215	126.6	34	43	2800	6160	2800	6160	4.0	58				144
380/75R-20 14.5L R-20 148 A8/B		W 12	W 11		384	15.1	1074	42.3	485	19.1	3250	128.0	34	43	3150	6930	3150	6930	4.0	58				148
460/70R-24 17.5L R-24 159 A8/B	MP-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	41	51	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph	
500/70R-24 19.5L R-24 164 A8/B		DW 16L	DW 15L DW 18L		485	19.1	1321	52.0	584	23.0	3950	155.5	43	53	5000	11000	5000	11000	4.0	58				164

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

STEEL BELTED RADIAL INDUSTRIAL TYRES

- Made for Agro / Industrial applications.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tire life.
- Extra strength and stability.
- Special tread compound for cut and heat resistance.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED		
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph	
340/80R-18 12.5L R-18 143 A8/B	MP-70	W 11	W 10	TL	345	13.8	1005	39.6	460	18.1	3025	119.1	34	43	2725	5995	2725	5995	4.0	58	143	B/50 kmph	B/30 mph	
340/80R-20 12.5L R-20 144 A8/B		11	W 10 W 11		345	13.8	1050	41.3	480	18.9	3215	126.6	34	43	2800	6160	2800	6160	4.0	58				144
380/75R-20 14.5L R-20 148 A8/B		W 12	W 11		384	15.1	1074	42.3	485	19.1	3250	128.0	34	43	3150	6930	3150	6930	4.0	58				148
460/70R-24 17.5L R-24 159 A8/B	MP-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	41	51	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph	
500/70R-24 19.5L R-24 164 A8/B		DW 16L	DW 15L DW 18L		485	19.1	1321	52.0	584	23.0	3950	155.5	43	53	5000	11000	5000	11000	4.0	58				164

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

RADIAL INDUSTRIAL TYRES

- Provide best performance on and off-the-road.
- Ideal for heavy duty service.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi			
400/70R-20 16.0/70 R-20 149 A8/B	MP-60	DW 13	12 SDC; 13 SDC; 14	TL	404	15.9	1067	42.0	475	18.7	3198	125.9	26	36	3250	7150	3250	7150	4.0	58	149	B/50 kmph	B/30 mph
400/70R-24 16.0/70 R-24 152 A8/B		DW 13	DW 12 DW 13 DW 14		404	15.9	1170	46.0	532	20.1	3526	138.9	33	41	3550	7810	3550	7810	4.0	58			

STEEL BELTED RADIAL INDUSTRIAL TYRES

- Provide best performance on and off-the-road.
- Ideal for heavy duty service.
- Extra strength and stability.
- Special tread compound for cut and heat resistance.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi			
400/70R-20 16.0/70 R-20 149 A8/B	MP-60	DW 13	12 SDC; 13 SDC; 14	TL	404	15.9	1067	42.0	475	18.7	3198	125.9	26	36	3250	7150	3250	7150	4.0	58	149	B/50 kmph	B/30 mph
400/70R-24 16.0/70 R-24 152 A8/B		DW 13	DW 12 DW 13 DW 14		404	15.9	1170	46.0	532	20.1	3526	138.9	33	41	3550	7810	3550	7810	4.0	58			

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.







Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

EARTHMOVER & PORT TYRES

- The special non-directional tread design formulated with silica based tread compound, together with a heavy duty nylon carcass makes it capable of withstanding cuts, snags and bruises under all service conditions.



ROCK LUG E-3

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.00-20	ROCK LUG E-3	18	7.5	TT	259	10.2	1035	42.7	476	18.7	3056	120.3	20	25	2650	5830	6.8	99	136		
10.00-20		20	8.0		274	10.8	1075	42.3	494	19.4	3171	124.8	26	33	2725	5995	7.5	109	143	B/50 kmph	B/30 mph
11.00-20		18	8.0		297	12.0	1115	44.0	529	22.0	3368	137.0	31	39	3000	6600	7.6	110	-		
17.5/65-20	ROCK LUG E-3	14	14.0	TL	450	17.7	1090	42.9	483	19.0	3302	130.0	26	33	3250	7150	2.4	35	149	A8/40 kmph	A8/25 mph
		16			26	33	3450	7590	2.8	40	151										
14.00-24	ROCK LUG E-3	24	10.0	TL	373	14.7	1368	53.8	635	25.0	4039	159.0	27	34	9500	20900	8.3	120	186	A2/10 kmph	A2/6 mph
		28			27	34	10300	22660	9.1	132	189										
16.9-24	ROCK LUG E-3	12	15.0	TL	460	18.1	1310	52.5	584	23.0	3785	149.0	27	34	3150	6930	2.8	40	148		
		16											27	34	3875	8525	3.3	48	155		
17.5L-24	ROCK LUG E-3	20	15.0	TL	27	34	4750	10450	3.6	52	162										
14.00-25	ROCK LUG E-3	12	15.0	TL	462	18.2	1280	50.0	559	22.0	3683	145.0	28	35	3908	8598	3.3	47	155		
		24			27	34	9500	20900	8.3	120	186										
15.5-25	ROCK LUG E-3	28	10.0	TL	375	14.8	1374	54.1	635	25.0	4039	159.0	27	34	10600	23320	8.4	122	190	A2/10 kmph	A2/6 mph
		12			12.0	394	15.5	1278	50.3	569	22.4	3658	144.0	27	34	5600	12320	4.0	57	168	
17.5-25	ROCK LUG E-3	16	14.0	TL		432	17.0	1344	52.9	635	25.0	3955	156.0	27	34	6300	13860	4.3	62	172	A2/10 kmph
		20			27									34	7300	16060	4.6	67	177		
18.00-25	ROCK LUG E-3	24	13.0	TL	510	20.1	1615	63.6	739	29.1	4780	188.2	32	39	8250	18150	5.5	80	181		
		28											32	39	8500	18700	5.9	85	182		
20.5-25	ROCK LUG E-3	32	13.0	TL	510	20.1	1615	63.6	739	29.1	4780	188.2	68	85	20950	46090	10.3	150	214	A2/10 kmph	A2/6 mph
		40											68	85	22950	50490	9.0	131	217		
20.5-25	ROCK LUG E-3	20	17.0	TL	531	20.9	1486	58.5	686	27.0	4394	173.0	31	39	9500	20900	4.4	64	186	A2/10 kmph	A2/6 mph
		24	17.0		531	20.9	1486	58.5	686	27.0	4394	173.0	31	39	10300	22660	5.3	76	189	A2/10 kmph	A2/6 mph
		24											31	39	6700	14740	4.0	58	174	B/50 kmph	B/30 mph
		28											31	39	11800	25960	5.4	78	194	A2/10 kmph	A2/6 mph
		28											31	39	7500	16500	4.2	60	178	B/50 kmph	B/30 mph
23.5-25	ROCK LUG E-3	20	19.5	TL	599	23.6	1610	63.4	749	29.5	4854	191.1	35	44	9500	20900	3.3	43	186	A2/10 kmph	A2/6 mph
		24	19.5		599	23.6	1610	63.4	749	29.5	4854	191.1	35	44	10900	23980	3.7	53	191	B/50 kmph	B/30 mph
		24											35	44	12500	27500	4.7	67	196	A2/10 kmph	A2/6 mph
		28											35	44	8500	18700	3.8	55	182	B/50 kmph	B/30 mph
		28											35	44	13200	29040	4.9	70	198	A2/10 kmph	A2/6 mph
26.5-25	ROCK LUG E-3	28	22.0	TL	690	27.2	1740	68.5	830	32.7	5195	204.6	36	45	9000	19800	3.0	40	184	B/50 kmph	B/30 mph
		28											36	45	15500	34100	4.8	70	203	A2/10 kmph	A2/6 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

EARTHMOVER & PORT TYRES

- Specially designed for port application.
- Heavy duty tyre with high load capacity.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs		bar	psi
18.00-25	E-4	40	13.0	TL	528	20.8	1675	66.0	765	30.1	4955	195.8	68	85	22950	50490	10.0	145	217	A2/10 kmph	A2/6 mph
18.00-33																				UNDER DEVELOPMENT	

EARTHMOVER & PORT TYRES

- Special tread compound enables less heat generation.
- Specially designed for heavy duty port applications.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
26.5-25	EM-999	28	22.0	TL	690	27.2	1740	68.5	830	32.7	5195	204.6	36	45	9000	19800	3.0	40	181	B/50 kmph	B/30 mph
													36	45	15500	34100	4.8	70	203	A2/10 kmph	A2/6 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

GRADER TYRES

- Rugged sturdy tyres for drive wheels of off-the-road equipment.
- Tough carcass and special trade compound with weather and ozone resistant properties to with stand cuts, snags and bruises in the most severe operating conditions.
- An open spaced traction pattern with self cleaning property provides traction capability, ideally suited for graders.



POWERGRIP G-2

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch		mm		mm		mm		mm		kg		bar			kmph	mph
			mm		inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi				
13.00-24	POWERGRIP G-2	12	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	26	32	2725	5995	3.0	44	143	A8/40 kmph	A8/25 mph
		16											32	3250	7150	3.9	57	149			
14.00-24		12	10.0		375	14.7	1350	53.1	610	24.0	4013	158.0	26	32	3075	6750	2.4	35	147		
		16											32	3650	8030	3.4	50	153			
15.5/80-24		16	12.0		384	15.0	1262	50.0	570	23.0	3875	153.0	28	35	6825	15015	4.0	58	151		
440/80-24		16	14.0		440	17.3	1320	52.0	597	23.5	3950	155.5	26	32	5600	12320	5.0	73	168		
15.5-25	POWERGRIP G-2	12	12.0	TL	386	15.2	1270	50.0	571	22.5	3772	148.5	25	31	2650	5830	2.5	36	142	A8/40 kmph	A8/25 mph
		16											31	3250	7150	3.1	45	149			
17.5-25		12	14.0		444	17.5	1331	52.4	597	23.5	3950	155.5	26	32	2900	6380	3.5	50	145		
		16											32	3350	7370	3.9	56	150			

GRADER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life. Extra thick side wall with rim guard gives protection against damage.



MONSTER

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch		mm		mm		mm		mm		kg		bar			kmph	mph
			mm		inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi				
13.00-24	MONSTER G-5	16	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	34	43	3250	7150	4.0	58	149	A8/40 kmph	A8/25 mph
14.00-24		16	10.0		375	14.7	1350	53.1	610	24.0	4013	158.0	35	44	3650	8030	3.7	54	153		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

RADIAL SKID STEER TYRES

- Deeper depth tyre tread for longer life. Bigger and sturdier blocks. Excellent chip and tear resistance compound. Extra thick side wall with rim guard gives protection against damages.



SIZE	PATTERN	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	10 kmph / 6 mph MAX LOAD		40 kmph / 25 mph MAX LOAD		bar	psi		kmph	mph
		inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi	kmph	mph	
260/70R-16.5 10R-16.5 129 A8/137 A2 300/70R16.5 12R-16.5 137 A8/145 A2	SSR-77	8.25	TL	260	10.2	772	30.4	348	13.7	2345	92.3	30	38	2300	5060	1850	4070	4.0	58	129	A8/40 kmph	A8/25 mph
9.75		300		11.8	833	32.8	374	14.7	2479	97.2	31	39	2900	6380	2300	5060	4.0	58	137			

STEEL BELTED RADIAL SKID STEER TYRES

- Deeper depth tyre tread for longer life. Bigger and sturdier blocks. Excellent chip and tear resistance compound. Extra thick side wall with rim guard gives protection against damages.



SIZE	PATTERN	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	10 kmph / 6 mph MAX LOAD		40 kmph / 25 mph MAX LOAD		bar	psi		kmph	mph
		inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi	kmph	mph	
260/70R-16.5 10R-16.5 129 A8/137 A2 300/70R16.5 12R-16.5 137 A8/145 A2	SSR-77	8.25	TL	260	10.2	772	30.4	348	13.7	2345	92.3	30	38	2300	5060	1850	4070	4.0	58	129	A8/40 kmph	A8/25 mph
9.75		300		11.8	833	32.8	374	14.7	2479	97.2	31	39	2900	6380	2300	5060	4.0	58	137			

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.







Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

SKID STEER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life. Extra thick side wall with rim guard gives protection against damage.



MONSTER L-5







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x8.50-12	MONSTER L-5	8	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	19	24	690	1518	3.5	50	90	A6/30 kmph	A6/18 mph
27x8.50-15		10	7.0		218	8.6	676	26.6	305	12.0	2006	79.0	23	29	1000	2200	4.3	61	106		
10.0/75-15.3		14	9.0		259	10.2	775	30.5	356	14.0	2311	91.0	34	43	2120	4664	4.7	68	134	A6/30 kmph	A6/18 mph
10-16.5	MONSTER L-5	12	8.25	TL	259	10.2	798	31.4	366	14.4	2337	92.0	37	46	2180	4796	4.4	64	135	A8/40 kmph	A8/20 mph
12-16.5		14	9.75		307	12.1	838	33.0	384	15.1	2515	99.0	37	46	2765	6083	4.8	70	144		
14-17.5		14	10.5		358	14.1	935	36.8	427	16.8	2743	108.0	36	45	2650	5830	5.5	80	142	A6/30 kmph	A6/18 mph

SKID STEER TYRES

- Deep tread, extra thick sidewall and tough casing ensure longer life. Silica & natural rubber base compound provides greater chip & tear resistance.



ROCK PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	ROCK PLUS HD	12	8.25	TL	268	10.5	790	31.1	356	14.0	2286	90.0	30	38	2120	4664	5.1	74	134	A8/40 kmph	A8/25 mph
12-16.5		14	9.75	TL	325	12.8	866	34.1	381	15.0	2438	96.0	34	42	2240	4928	6.2	90	136		
10.00-20		18	8.25	TT	284	11.2	1080	42.5	508	20.0	3175	125.0	31	39	6500	14300	8.3	118	173	A8/40 kmph	A8/25 mph
12.00-20		20			320	12.6	1151	45.3	530	20.9	3390	133.5	35	44	6900	15180	9.8	142	175		
		20	8.50	TT	320	12.6	1151	45.3	530	20.9	3390	133.5	35	44	7750	17050	9.0	130	179	A6/30 kmph	A6/18 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

SKID STEER TYRES

- Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs heavier sidewall.



STEERKING HD+

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING HD+	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	17	21	1550	3410	5.1	74	123	A8/40 kmph	A8/25 mph
		12											17	21	1700	3740	5.2	75	126		
12-16.5		12	9.75	TL	325	12.8	853	33.6	381	15.0	2438	96.0	20	25	2060	4532	5.4	78	133		
		14											20	25	2300	5060	6.2	90	137		

SKID STEER TYRES

- Wide wall tyres with side wall and rim guard protectors, meant for the value conscious performance oriented applications.



STEERKING +

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING +	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	14	17	1560	3432	5.1	74	123	A8/40 kmph	A8/25 mph
		12											14	17	1650	3630	5.2	75	125		
12-16.5		12	9.75	TL	312	12.3	825	32.5	381	15.0	2438	96.0	16	20	1850	4070	4.4	64	129		
		14											16	20	2120	4664	4.8	70	134		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.







Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

SKID STEER TYRES

- Premium tyre with extra deep tread and thick sidewalls providing better traction, puncture resistance and longer life. Specially designed rim guard ensures greater protection against flats and wheel damage in the rim flange area.



STEER PLUS HD







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x8.50-12	STEER PLUS HD	6	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	13	16	600	1320	3.3	48	90	A8/40 kmph	A8/25 mph
27x8.50-15		8	7.0		218	8.6	676	26.6	305	12.0	2006	79.0	13	16	950	2090	4.1	60	106		
31.5x13-16.5		14	9.75		328	12.9	803	31.6	356	14.0	2337	92.0	19	24	2430	5346	4.7	68	139		
33x15.5-16.5		14	13.0		394	15.5	838	33.0	381	15.0	2464	97.0	19	24	3150	6930	5.1	74	148		
14-17.5	STEER PLUS HD	14	10.5	TL	348	13.7	940	37.0	406	16.0	2743	108.0	25	31	2650	5830	5.5	80	142	A6/30 kmph	A6/18 mph
15-19.5		14	11.75		401	15.8	1036	40.8	457	18.0	3048	120.0	25	31	3350	7370	4.8	70	150	A8/40 kmph	A8/25 mph

SKID STEER TYRES

- Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs heavier sidewall.



ROCKMASTER

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	ROCKMASTER	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	17	21	1950	4290	4.1	60	131	A8/40 kmph	A8/25 mph
		12											2180	4796	5.2	75	135				
12-16.5		12	9.75	TL	325	12.8	853	33.6	381	15.0	2438	96.0	20	25	2360	5192	4.1	60	138		
	14	20											25	2800	6160	4.9	71	144			

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

DRIVE WHEEL TYRES (R-3)

- Tread specially designed to give minimum ground disturbance.
- Suitable for use on orchards, soft soil, road construction and similar applications.



SIZE	PATTERN	PLY RATING	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch	mm		inch	mm	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
14.9-24	SW-333	8	13.0	TL	378	14.9	1262	49.7	574	22.6	3835	151.0	19	24	1800	3960	1.8	26	128	A6/30 kmph	A6/20 mph	
		10											2000	4400	2.1	30	132					
		12											2240	4928	2.4	35	136					
23.1-26	SW-333	8	20.0	TL	587	23.1	1560	61.4	686	27.0	4547	179.0	28	36	2900	6380	1.1	16	145	A6/30 kmph	A6/20 mph	
		12											3650	8030	1.7	24	153					
		16											4375	9625	2.2	32	159					
18.4-26	SW-333	12	16.0	TL	475	18.7	1430	56.3	635	25.0	4140	163.0	24	30	3000	6600	2.3	33	146	A6/30 kmph	A6/20 mph	
		16											3550	7810	2.8	41	152					
		8											18	22	1650	3630	2.0	29	125			
13.6-28	SW-333	10	12.0	TL	345	13.6	1318	51.9	587	23.1	3835	152.0	18	22	1850	4070	2.2	32	129	A6/30 kmph	A6/20 mph	
		12											2060	4530	2.5	36	133					

EXCAVATOR TYRES

- Speedways Excavator Tyres are designed for heavy duty service.
- Specially engineered tread pattern provides excellent traction, good self cleaning as well as good on the road drive ability.



SIZE	PATTERN	PLY RATING	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY 50KPH / 30MPH MAX LOAD		INFLATION PRESSURE		LOAD INDEX	SPEED	
			STD. inch	ALT. inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
8.25-20	EV-999	14	6.5	7.0	TT	236	9.3	980	38.6	457	18.0	2972	117.0	20	25	2065	4545	6.8	98	133	B/50 kmph	B/30 mph
9.00-20		14	7.0	7.5		257	10.1	1039	40.9	483	19.0	3073	121.0	22	27	2500	5500	7.0	102	140		
10.00-20		16	7.5	8.0		277	10.9	1075	42.3	508	20.0	3175	125.0	21	26	3000	6600	7.6	110	146		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

INDUSTRIAL BACKHOE LOADER TYRES

- Premium tyres with superior tread compound, larger tread lugs and extra heavy sidewall.



OFFROADER

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
240/55D17.5	OFFROADER	10	6.75	TL	229	9.0	731	28.7	13	16	2120	4665	6.8	99	134	B/50 kmph	B/30 mph

INDUSTRIAL BACKHOE LOADER TYRES

- Strong and sturdy heavy duty design.
- Cut and crack resistant tread compound.



DUGRIGGER







SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
355/55D625	DUGRIGGER	14	11.75	TL	355	14.0	935	36.8	20	25	3550	7810	3.7	53	152	B/50 kmph	B/30 mph
385/65D19.5		UNDER DEVELOPMENT															
385/65D22.5		UNDER DEVELOPMENT															

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL BACKHOE LOADER TYRES

- Specially designed for soil tillage operations.
- Suitable for implement machinery and trailers.









SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
11L-15	F-3	12	8.0	TL	280	11.0	813	32.0	355	14.0	2362	93.0	13	16	1180	2596	4.0	58	114	A8/40 kmph	A8/25 mph
11L-16		12	8.0		280	11.0	820	32.3	381	15.0	2438	96.0	13	16	1250	2750	4.3	62	116		
		14			13	16	1360	2992	4.8	70	119										

INDUSTRIAL BACKHOE LOADER TYRES

- Extra wide lugs designed to resist buckling, tearing and cracking.
- Multi step lug design provides better self cleaning and stability.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10.5/80-18	MPT	10	9.0	TL	267	10.8	910	35.8	406	16.0	2667	105.0	24	31	1950	4290	5.0	72	131	A8/40 kmph	A8/25 mph
12.5/80-18		12	9.0		307	12.1	988	38.9	432	17.0	2896	114.0	26	32	2650	5830	3.7	54	142		
		16			26	32	3150	6930	4.9	70	148										







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

INDUSTRIAL BACKHOE LOADER TYRES

- Extra wide lugs designed to resist buckling, tearing and cracking.
- Excellent tread wear and road ability, the laterally designed lugs result in even wear.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
33x12.5-15	AT-999	8	10.0	TL	318	12.5	851	33.5	381	15.0	2489	98.0	20	25	2120	4664	3.2	46	134	A8/40 kmph	A8/25 mph
12.5/70-16		14	10.0		315	12.4	853	33.6	381	15.0	2590	102.0	21	26	1650	3630	2.6	38	125		
15.5/60-18		14	13.0		401	15.8	950	37.4	432	17.0	2870	113.0	25	31	2430	5346	2.6	38	139		
15.5/70-18 (400/70-18)		12	13.0		401	15.8	1031	40.6	483	19.0	3099	122.0	25	31	2430	5346	2.4	35	139		
17.5/65-20		14	14.0		450	17.7	1090	42.9	483	19.0	3302	130.0	27	34	3250	7150	2.4	35	149		
16.9-24	AT-999	12	15.0	TL	450	17.7	1303	51.3	584	23.0	3785	149.0	31	39	3250	7150	2.6	37	149	A8/40 kmph	A8/25 mph
		16			452	17.8	1270	50.0	559	22.0	3683	145.0	31	39	3875	8525	3.3	48	155		
17.5L-24		12	15.0		472	18.6	1372	54.0	603	24.0	4039	159.0	29	36	3150	6930	2.6	38	148		
18.4-24		16			472	18.6	1372	54.0	603	24.0	4039	159.0	29	36	3750	8250	3.3	48	154		
19.5L-24	AT-999	12	16.0	TL	495	19.5	1321	52.0	584	23.0	3835	151.0	30	38	3875	8525	2.4	35	155	A8/40 kmph	A8/25 mph
		16			495	19.5	1321	52.0	584	23.0	3835	151.0	29	36	3450	7590	2.3	33	151		
18.4-26		12	16.0		480	18.9	1422	56.0	635	25.0	4140	163.0	31	39	4000	8800	2.4	36	156		
		16			480	18.9	1422	56.0	635	25.0	4140	163.0	31	39	4875	10725	3.1	45	163		
16.9-28		12	15.0		450	17.7	1410	55.5	635	25.0	4140	163.0	30	38	3550	7810	2.6	38	152		
		16											30	38	4125	9075	3.3	48	157		







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL BACKHOE LOADER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life. Extra thick side wall with rim guard gives protection against damage.



MONSTER







SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
11L-16	MONSTER L-5	14	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	22	27	1360	2992	4.8	70	119	A8/40 kmph	A8/25 mph
12.5/80-18		12	9.0		305	12.0	975	38.4	432	17.0	2896	114.0	34	43	2120	4665	3.1	45	134		
		16			34	43	2650	5830	3.8	55	142										
19.5L-24	MONSTER L-5	16	17.0	TL	490	19.3	1298	51.1	589	23.2	3835	151.0	41	51	4125	9075	3.0	44	157	A8/40 kmph	A8/25 mph
18.4-26		16	16.0		475	18.7	1425	56.1	635	25.0	4191	165.0	39	49	4875	10725	3.1	45	163		
16.9-28		16	15.0		440	17.3	1410	55.5	635	25.0	4140	163.0	36	45	4250	9350	3.5	50	158		

INDUSTRIAL BACKHOE LOADER TYRES

- Strong and sturdy heavy duty design.
- Effective self cleaning properties.
- Ideal for backhoe loaders.



POWER LUG R-4

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.9-24	POWER LUG R-4	12	15.0	TL	440	17.3	1308	51.5	584	23.0	3861	152.0	27	34	3250	7150	2.6	38	149	A8/40 kmph	A8/25 mph
		16											27	34	3875	8525	3.3	48	155		
17.5L-24	POWER LUG R-4	12	15.0	TL	445	17.5	1270	50.0	559	22.0	3683	145.0	28	35	3150	6930	2.6	38	148	A8/40 kmph	A8/25 mph
		16											28	35	3750	8250	3.3	48	154		
18.4-24	POWER LUG R-4	12	16.0	TL	472	18.6	1375	54.1	603	32.7	4039	159.0	29	36	3875	8525	2.4	35	155	A8/40 kmph	A8/25 mph
		16											29	36	4375	9625	3.0	44	159		
19.5L-24	POWER LUG R-4	12	16.0	TL	495	19.5	1325	52.1	584	23.0	3835	151.0	29	36	3450	7590	2.3	33	151	A8/40 kmph	A8/25 mph
		16											29	36	4125	9075	3.0	44	157		
21L-24	POWER LUG R-4	12	18.0	TL	533	21.0	1377	54.2	610	24.0	3988	157.0	30	37	3875	8525	2.2	32	155	A8/40 kmph	A8/25 mph
		16											30	37	4500	9900	2.6	38	160		
18.4-26	POWER LUG R-4	12	16.0	TL	475	18.7	1425	56.1	635	25.0	4191	165.0	29	36	4000	8800	2.4	35	156	A8/40 kmph	A8/25 mph
		16											29	36	4875	10725	3.1	45	163		
16.9-28	POWER LUG R-4	12	15.0	TL	440	17.3	1410	55.5	635	25.0	4140	163.0	30	38	3550	7810	2.6	38	152	A8/40 kmph	A8/25 mph
		16											30	38	4125	9075	3.3	48	157		
16.9-30	POWER LUG R-4	12	15.0	TL	440	17.3	1460	57.5	660	26.0	4216	166.0	28	35	3650	8030	2.6	38	153	A8/40 kmph	A8/25 mph
		16											28	35	4250	9350	3.1	45	158		

MULTI PURPOSE TRUCK TYRES

- Tyres for multi purpose trucks, designed for use on highways, off-the-road and agriculture applications. Specially engineered tread pattern offers maximum flexibility.
- Good traction in all weather conditions.
- Good on-the-road drive ability and self cleaning properties.



MPT-007

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch																		
10.0/75-15.3	MPT-007	10	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	19	24	1550	3410	3.8	55	123	A8/40 kmph	A8/25 mph
		12											1700	3740	4.6	67	126				
		14											1900	4180	5.4	78	130				
		18											2200	4840	6.9	100	135				
11.5/80-15.3	MPT-007	10	9.0	TL	292	11.5	869	34.2	381	15.0	2564	101.9	19	24	1950	4290	3.3	48	131	A8/40 kmph	A8/25 mph
		14											2430	5345	4.6	67	139				
		18											2725	5995	5.9	85	143				
		19											24	2725	5995	5.9	85	143			
10.5-18	MPT-007	10	9.0	TL	269	10.6	904	35.6	406	16.0	2692	106.0	21	26	1750	3850	3.7	53	127	A8/40 kmph	A8/25 mph
		12											2180	4796	4.4	64	135				
		24											30	2060	4532	2.9	42	133			
		24											30	2240	4930	3.4	50	136			
12.5-18	MPT-007	10	11.0	TL	325	12.8	991	39.0	457	18.0	2946	116.0	24	30	2430	5345	3.8	55	139	A8/40 kmph	A8/25 mph
		12											4750	10450	5.9	85	162				
		14											5450	11990	7.0	102	167				
		16											27	34	4750	10450	5.9	85	162		
18-19.5	MPT-007	18	14.0	TL	460	18.1	1105	43.5	508	20.0	3277	129.0	27	34	5450	11990	7.0	102	167	A8/40 kmph	A8/25 mph
		27											34	5450	11990	7.0	102	167			
		21											27	2060	4532	3.7	54	133			
		24											30	2120	4665	2.9	42	134			
10.5-20	MPT-007	10	9.0	TL	269	10.6	955	37.6	457	18.0	2870	113.0	21	27	2060	4532	3.7	54	133	A8/40 kmph	A8/25 mph
		10											24	30	2120	4665	2.9	42	134		
		12											24	30	2300	5060	3.4	50	137		
		16											24	30	2500	5500	3.6	52	140		
12.5-20	MPT-007	18	11.0	TL	325	12.8	1039	40.9	483	19.0	3099	122.0	24	30	2725	5995	3.8	55	143	A8/40 kmph	A8/25 mph
		24											30	2725	5995	3.8	55	143			
		26											32	2300	5060	2.5	36	137			
		26											32	2500	5500	2.8	40	140			
14.5-20	MPT-007	12	11.0	TL	361	14.2	1115	43.9	483	19.0	3302	130.0	26	32	2300	5060	2.5	36	137	A8/40 kmph	A8/25 mph
		12											26	32	2500	5500	2.8	40	140		
		14											26	32	2800	6160	3.4	50	144		
		18											26	32	3150	6930	4.4	64	148		







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

MULTI PURPOSE TRUCK TYRES

- Can be used for on and off-the-road applications.
- Provide great traction in all weather conditions.



MPT-999







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.0/70-20	MPT-999	14	13.0	TL	404	15.9	1128	44.4	483	19.0	3353	132.0	24	30	3250	7150	3.4	50	149	B/50 kmph	B/30 mph
18-22.5		12	14.0		465	18.3	1189	46.8	533	21.0	3530	139.0	29	36	4500	9900	4.4	64	160		

MULTI PURPOSE TRUCK TYRES

- Tyres for multi purpose trucks, designed for use on highways, off-the-road and agriculture applications. Specially engineered tread pattern offers maximum flexibility.
- Good traction in all weather conditions.
- Good on-the-road drive ability and self cleaning properties.



GRIPMAX

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.0/70-24	GRIPMAX	14	13.0	TL	404	15.9	1184	46.6	356	14.0	3530	139.0	30	38	3550	7810	3.5	50	153	B/50 kmph	B/30 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.





Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

COMPACTOR TYRES

- Speedways compactor tyres are engineered to provide even distribution of ground pressure and to give optimum compaction.
- Tread compound specially formulated to endure high temperatures and minimize loose materials sticky to tyres.



ROAD KING





SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		LOAD CAPACITY 				INFLATION PRESSURE		LOAD INDEX	SPEED	
									10 KPH MAX LOAD		20 KPH MAX LOAD					kmph	mph
					mm	inch	mm	inch	kg	lbs	kg	lbs	bar	psi			
7.50-15	ROADKING	6	6.0	TT/TL	226	8.9	790	31.1	1700	3740	1500	3300	3.9	57	122	A4/20 kmph	A4/12 mph
8.5/90-15K		14			231	9.1	785	30.9	2800	6160	2300	5060	8.6	125	137		
9.00-20	ROADKING	12	7.0	TT/TL	274	10.8	1016	40.0	4125	9075	3150	6930	6.2	90	148	A4/20 kmph	A4/12 mph
11.00-20		14			274	10.8	1016	40.0	4500	9900	3450	7590	7.2	104	151		
		16	305		12.0	1082	42.6	5450	11990	4375	9625	7.2	104	159			
		18							6000	13200	4625	10175	8.1	118	161		

INDUSTRIAL FORKLIFT TYRES

- Deep tread, extra thick sidewall and tough casing ensure longer life. Silica and natural rubber base compound provides greater chip and tear resistance.



ROCK PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
																kmph	mph
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi			
250-15	ROCKPLUS HD	20	7.0/7.5	TT	240	9.4	735	28.9	19	24	3875	8525	10.0	145	155	A6/30 kmph	A6/20 mph
300-15		20	8.0		300	11.8	840	33.1	23	29	5000	11000	9.0	128	164		
10.00-20		18	7.5		284	11.2	1080	42.5	31	39	6500	14300	8.3	120	173		
12.00-20		20	8.5		320	12.6	1151	45.3	35	44	7750	17050	9.0	130	179		





* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL FORKLIFT TYRES

- Premium tyre, designed for heavy duty service on forklift trucks, material handling and mining equipment.
- The deep tread, extra thick sidewalls and touch casing provide exceptional durability and minimize the risk of puncture and accidental damages.
- Silica and natural rubber in tread compound provides greater chip and rear resistance.
- Specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.



LIFTKING HD





SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.80/4.00-8	LIFTKING HD	8	3.0	TT	117	4.6	414	16.3	8	10	530	1165	10.0	145	86	A6/30 kmph	A6/20 mph
5.70/5.00-8		10	3.0		132	5.2	467	18.3	14	18	1400	3080	9.8	142	120		
6.90/6.00-9		10	4.0		160	6.3	540	21.2	16	20	1700	3740	8.3	120	126		
6.50-10	LIFTKING HD	12	5.0	TT	178	7.0	588	23.1	16	20	2180	4796	8.8	128	135	A6/30 kmph	A6/20 mph
7.00-12		14	5.0		192	7.6	690	27.1	18	23	2725	5995	8.9	128	143		
7.00-15		12	5.5		201	7.9	762	30.0	16	20	3075	6765	8.6	125	147		
7.50-15	LIFTKING HD	14	6.0	TT	211	8.3	772	28.3	18	23	3000	6600	9.0	130	146	A6/30 kmph	A6/20 mph
28x9-15		14	7.0		213	8.4	720	33.7	18	23	3875	8525	9.8	142	155		
8.25-15		16	6.5		239	9.4	855	33.6	18	23	3550	7810	9.1	131	152		

INDUSTRIAL FORKLIFT TYRES

- Unique lug design for extra surface for highest mileage.
- Cut and crack resistant tread compound.



LIFTPOWER

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x5	LIFTPOWER	10	4.0	TT	155	6.1	635	25.0	10	13	2000	4400	8.0	114	132	A6/30 kmph	A6/20 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

INDUSTRIAL SOLID TYRES

- Long tyre life with consistent performance.
- Low heat build-up and rolling resistance .
- Perfect driving comfort.



SIZE	PATTERN	TYPE	RIM WIDTH		SECTION WIDTH		OVERALL DIAMETER		LOAD CAPACITY			
			inch	mm	inch	mm	inch	mm	Load wheel		Steer wheel	
									kg	lbs	kg	lbs
4.00-8	SL-555	STD/LIP	3.0	406	16.0	99	3.9	950	2090	730	1606	
5.00-8			3.0	455	17.9	124	4.9	1420	3124	1090	2398	
15x4 1/2-8			3.0	386	15.2	114	4.5	1040	2288	800	1760	
16x6-8			4.3	406	16.0	163	6.4	1495	3289	1150	2530	
18x7-8			4.3	457	18.0	150	5.9	2145	4719	1650	3630	
6.00-9	SL-555	STD/LIP	4.0	523	20.6	142	5.6	1885	4147	1450	3190	
140/55-9			4.0	391	15.4	142	5.6	1170	2574	900	1980	
21x8-9			6.0	526	20.7	193	7.6	2755	6061	2120	4664	
6.50-10			5.0	577	22.7	160	6.3	2340	5148	1800	3960	
7.50-10			5.5	653	25.7	180	7.1	3070	6754	2360	5192	
200x50-10	SL-555	STD/LIP	6.5	452	17.8	188	7.4	2470	5434	1900	4180	
23x9-10			6.5	572	22.5	211	8.3	3445	7579	2650	5830	
7.00-12			5.0	645	25.4	175	6.9	2920	6424	2240	4928	
23x10-12			8.0	592	23.3	245	9.7	3770	8294	2900	6380	
27x10-12			8.0	650	25.6	249	9.8	3900	8580	3000	6600	
7.00-15	SL-555	STD/LIP	5.5	701	27.6	191	7.5	3545	7799	2725	5995	
7.50-15			5.5	719	28.3	191	7.5	3900	8580	3000	6600	
250-15			7.0	734	28.9	236	9.3	4750	10450	3650	8030	
8.15-15			7.0	688	27.1	213	8.4	3445	7579	2650	5830	
8.25-15			6.5	780	30.7	201	7.9	4750	10450	3650	8030	
300-15	SL-555	STD/LIP	8.0	820	32.3	257	10.1	5850	12870	4500	9900	
28x12.5-15			9.7	688	27.1	315	12.4	5525	12155	4250	9350	
355/65-15			9.7	820	32.3	300	11.8	7800	17160	6000	13200	
7.50-16			5.5	782	30.8	201	7.9	3908	8598	2831	6228	
8.00-16			UNDER DEVELOPMENT									
7.50-20	SL-555	STD/LIP	6.0	883	34.7	179	7.1	3840	8448	3200	7040	
8.25-20			7.0	988	38.9	231	9.1	4400	9680	3675	8085	
9.00-20			UNDER DEVELOPMENT									
9.00-20			7.0	1026	40.4	241	9.5	5340	11748	4450	9790	
9.00-20			7.5	1026	40.4	241	9.5	5340	11748	4450	9790	
10.00-20	SL-555	STD/LIP	7.5	1026	40.4	241	9.5	6000	13200	5000	11000	
10.00-20			8.0	1026	40.4	241	9.5	6000	13200	5000	11000	
11.00-20			8.0	1052	41.4	263	10.4	6510	14322	5245	11540	
12.00-20			8.5	1102	43.4	295	11.6	7500	16500	6250	13750	
12.00-20			UNDER DEVELOPMENT									
12.00-24	SL-555	STD/LIP	8.5	1194	47.0	300	11.8	8000	17600	6650	14630	
12.00-24			10.0	1194	47.0	300	11.8	8000	17600	6650	14630	
14.00-24			10.0	1300	51.2	335	13.2	11000	24200	9175	20185	

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

TRUCK
TYRES



TRUCK & LIGHT TRUCK TYRES (DOT)

- Better traction and good braking performance.
- Ensures even wear.
- Low heat generation.
- Excellent retreadability.



MILESTONE

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
LT205/90D15 (7.00-15E)	MILESTONE	10	5.5	TL	206	8.1	770	30.3	8	10	1180	2600	4.5	65	114	P/150 kmph	P/94 mph
LT225/90D16 (7.50-16E)		10	6.0		218	8.6	823	32.4	8	10	1590	3500	5.5	80	124		

TRUCK & LIGHT TRUCK TYRES

- Longer life with stable performance.
- High load carrying capacity.
- Strong casing.
- Excellent retreadability.



LOAD RUNNER

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.00-16	LOAD RUNNER	16	6.5	TT	254	10.0	914	36.0	21	26	2120	4664	7.2	105	134	J/100 kmph	J/60 mph
		18							21	26	2360	5190	7.6	110	148	A8/40 kmph	A8/25 kmph
10.00-20		16	7.5		274	10.8	1075	42.3	21	26	3000	6600	7.9	115	146	J/100 kmph	J/60 mph
		18							21	26	3075	6765	8.3	120	147		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

TRUCK & LIGHT TRUCK TYRES

- Balanced rib type design.
- Excellent retreadability.
- Ensure even wear.



MILEAGE MAKER

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.00-15	MILEAGE MAKER	12	5.5	TT	206	8.1	770	30.3	14	17	1180	2596	6.2	90	114	J/100 kmph	J/60 mph
9.00-20		14	7.0		259	10.2	1025	40.3	16	20	2575	5665	7.6	110	141		

TRUCK & LIGHT TRUCK TYRES

- Designed for durability and performance.
- Strong casing.
- Higher skid depth.
- Excellent retreadability.



LOAD KING

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.50-16	LOAD KING	16	6.0	TT	218	8.6	823	32.4	19	24	1600	3520	7.6	110	124	J/100 kmph	J/60 mph
		18							19	24	1650	3630	7.9	115	125		
8.25-16		16	6.5		231	9.1	841	33.1	18	23	1850	4070	7.6	110	129		
		18							18	23	1900	4180	7.9	115	130		
9.00-20		16	7.0		259	10.2	1035	40.7	19	24	2650	5830	7.9	115	142		
		18							19	24	2725	5995	8.2	119	143		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

TRUCK & LIGHT TRUCK TYRES

- Even tread wear and superior mileage.
- Wet rolling resistant and good road grip.
- Excellent traction and braking.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED		
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph	
6.40-15	MILESTONE	8	4.0	TT	160	6.3	693	27.3	13	16	710	1562	4.2	60	96	J/100 kmph	J/60 mph	
		10							13	16	825	1815	5.4	77	101			
6.70-15		8	4.5		165	6.5	710	28.0	13	16	825	1815	4.2	60	101			
		10			13	16	925	2035	5.4	77	105							
7.00-15		12	5.5		206	8.1	770	30.3	13	16	1180	2596	6.2	90	114			
7.50-15		MILESTONE	12		6.0	TT	216	8.5	780	30.7	14	17	1360	2990	5.5			80
	14		14	17							1450	3190	6.2	90	121			
7.00-16	10		5.5	206	8.1		785	30.9	30.9	14	18	1090	2398	5.1	73	111		
	12									14	18	1215	2675	6.2	90	115		
14	14		18	1320	2904		6.9	100	118									
7.50-16	MILESTONE		12	6.0	TT		218	8.6	823	32.4	13	16	1400	3080	6.2	90	120	J/100 kmph
		14	13			16					1500	3300	6.9	100	122			
8.25-16		14	6.5	231		9.1	841	33.1	33.1	14	17	1800	3960	6.9	100	128		
		16								14	17	1850	4070	7.6	110	129		
10.00-20		16	7.5	274		10.8	1060	41.7	41.7	19	24	3000	6600	7.9	115	146		
11.00-20		16	8.0	290		11.4	1082	42.6	42.6	15	19	3250	7150	7.9	115	149		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

TRUCK & LIGHT TRUCK TYRES

- Longer tyre life thanks to better tread contact area.
- High load carrying capacity.
- Low heat generation.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.00-15	TIGER	12	5.5	TT	206	8.1	770	30.3	18	22	1180	2596	6.2	90	114	J/100 kmph	J/60 mph
10.00-20		18	7.5		274	10.8	1075	42.3	26	33	3075	6765	8.3	120	147		

TRUCK & LIGHT TRUCK TYRES

- Unique design with high mileage.
- Better air circulation and faster heat dissipation.
- High fuel efficiency.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.50-16	GTSW	16	6.0	TT	218	8.6	823	32.4	12	15	1600	3520	7.6	110	124	J/100 kmph	J/60 mph
		18							12	15	1650	3630	7.9	115	125		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

TRUCK & LIGHT TRUCK TYRES

- Superior tread and shoulder design.
- Better tyre life and uniform wear
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
12.00-20	SANDGRIP	18	8.5	TT	320	12.6	1138	44.8	21	26	3250	7150	7.3	105	149	G/90 kmph	G/56 mph

TRUCK & LIGHT TRUCK TYRES

- Premium compound helps in reducing heat generation.
- Better tyre life and fuel efficiency.
- Irregular wear resistant.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
12.00-24	LOAD POWER	18	8.5	TT	315	12.3	1240	48.8	21	26	4250	9350	7.9	115	158	J/100 kmph	J/60 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

TRUCK & LIGHT TRUCK TYRES

- Strong casing.
- Ensure even wear.
- Excellent retreadability.



HUNTER

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
5.60-14	HUNTER	10	4.0	TT	145	5.7	640	25.2	13	16	580	1276	4.3	61	89	J/100 kmph	J/60 mph

TRUCK & LIGHT TRUCK TYRES

- Irregular wear resistant.
- Better tyre life and fuel efficiency.
- Excellent retreadability.



SILVER STONE

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
6.00-16	SILVERSTONE	10	4.5	TT	174	6.9	752	29.6	11	14	875	1925	5.1	73	103	J/100 kmph	J/60 mph
6.50-16		12	4.5		185	7.3	765	30.1	11	14	1030	2266	4.7	68	109		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

TRUCK & LIGHT TRUCK TYRES

- Unique tread design.
- High fuel efficiency.
- Low heat generation.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
6.00-16	TOUGH TRACK PLUS	10	4.0	TT	174	6.9	752	29.6	11	14	875	1925	5.1	73	103	J/100 kmph	J/60 mph

TRUCK & LIGHT TRUCK TYRES

- Longer life and stable performance.
- Better air circulation and faster heat dissipation.
- High load carrying capacity.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.00-16	SAMRAT +	16	6.5	TT	254	10.0	914	36.0	19	24	2120	4664	7.2	105	134	J/100 kmph	J/60 mph
		18							19	24	2475	6600			140		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

TRAILER TYRES

- Irregular wear resistant.
- Wet rolling resistant.
- Excellent retreadability.



RANGER

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.50-10	RANGER	8	3.5	TT	132	5.2	490	19.3	11	14	520	1145	5.0	72	86	F/80 kmph	F/50 mph
		10	3.5		125	4.9	490	19.3	11	14	560	1232	5.0	73	88		
5.00-10		8	3.5		135	5.3	510	20.0	11	14	580	1276	5.0	72	89		
		10	3.5		155	6.1	531	20.9	11	14	615	1353	5.1	73	91		
145-10		8	3.5		140	5.5	500	19.7	9	11	500	1100	4.5	65	84		
4.50-12	RANGER	8	3.0	TT	127	5.0	544	21.4	10	12	290	640	2.4	35	65	L/120 kmph	L/75 mph
		10	3.0		127	5.0	526	20.7	8	10	325	715	2.8	40	69		
4.80-12		6	3.8		127	5.0	526	20.7	8	10	450	990	6.3	89	80		
		10	3.5		142	5.6	564	22.3	11	14	500	1100	4.3	61	84		

TRAILER TYRES

- Balanced rib type design.
- Excellent traction and braking.
- Better air circulation.
- Excellent retreadability.



STORM

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
6.00-14	STORM	8	4.5	TT	170	6.7	681	26.8	8	10	690	1818	4.3	61	95	J/100 kmph	J/60 mph
		10							8	10	800	1760	5.0	72	100		
6.50-14		8	4.5		180	7.1	704	27.7	13	16	850	1870	4.3	62	102		
		10							13	16	925	2035	4.5	65	105		
E78-14		6	5.5		188	7.4	656	25.8	12	15	620	1364	2.2	31	91	A8/40 kmph	A8/25 mph
175D-14		6	5.0						178	7.0	656	25.8	12	15	615		

TRAILER TYRES

- Strong casing.
- High fuel efficiency.
- Good road grip.
- Excellent retreadability.



SULTAN

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.80-8	SULTAN	6	3.8	TT	122	4.8	420	16.5	9	11	335	737	6.3	89	70	F/80 kmph	F/50 mph
5.70-8		8	4.5		150	5.9	467	18.3	9	11	488	1074	7.1	100			

TRAILER TYRES

- Even tread wear and superior mileage.
- Longer life with stable performance.
- Excellent retreadability.



IAP

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.50-10	INDUSTRIAL ALL PURPOSE (IAP)	10	5.5	TT	206	8.1	645	25.3	11	14	1360	2992	6.2	90	119	A8/40 kmph	A8/25 mph
8.25-10		12	6.0		211	8.3	675	26.5	11	14	1650	3630	7.2	105			

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

TRAILER TYRES

- Even tread wear and superior mileage.
- Wet rolling resistant and good road grip.
- Excellent traction and braking.
- Excellent retreadability.



MILESTONE +

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
5.30-12	MILESTONE+	6	4.3	TT	135	5.3	550	21.6	8	10	475	1045	5.6	79	82	L/120 kmph	L/75 mph
5.65-12		4	4.0		140	5.5	520	20.5	8	10	250	550	1.7	24	60		
145D-12		8	4.0		140	5.5	540	21.2	9	11	375	825	2.3	32	74		
155D-12	MILESTONE+	8	4.5	TT	155	6.1	558	22.0	12	15	560	1230	3.6	51	82	K/110 kmph	K/68 mph
		10							12	15	625	1375	6.3	89	92		
5.90-15		8	4.0		150	5.9	670	26.4	7	9	460	1012	2.0	28	81	A8/40 kmph	A8/25 mph
195/80D-15	8	5.5	195	10.0	697	27.4	14	15	775	1705	4.2	60	99				

TRAILER TYRES

- Balanced rib type design.
- Excellent traction and braking.
- Better air circulation.
- Excellent retreadability.



DUST STORM

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.00-15	DUST STORM	8	6.5	TT	254	10.0	865	34.0	11	14	1100	2420	3.5	50	112	A8/40 kmph	A8/25 mph
9.00-16			6.5		254	10.0	898	35.3	11	14	1210	2662	3.5	50	115		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

TRAILER TYRES

- High load carrying capacity.
- Irregular wear resistant.
- Low heat generation.
- Excellent retreadability.



TRACKGRIP

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED		
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph	
215/75-17.5	TRACKGRIP	12	6.8	TT	213	8.4	780	30.7	9	11	2120	4664	7.0	100	134	A8/40 kmph	A8/25 mph	
		16							9	11	2650	5830	9.0	128				
225/75-17.5		16	6.8		224	8.8	795	31.3	9	11	2900	6380	9.0	128				145
235/75-17.5		16	6.8		236	9.3	810	31.9	9	11	3400	7480	9.0	128				151

TRAILER / JEEP TYRES

- Excellent for ON/OFF Road applications and ensures good all-round performance as well as good traction and durability in ON/OFF Road applications.
- Reinforced sidewalls to enhance protection against impacts and cuts from obstacles and debris.
- Excellent retreadability.



MILLENNIUM

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
F78-15	MILLENNIUM	6	5.5	TT	198	7.8	694	27.3	10	13	760	1672	3.5	50	98	A8/40 kmph	A8/25 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

VINTAGE VEHICLE TYRES

- Built to last and provide long service life.
- Irregular wear resistant.
- Ensure even wear.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
5.60-13	LANDMARK	6	4.0	TT	155	6.1	595	23.4	7	9	385	847	2.8	40	75	A8/40 kmph	A8/25 mph
165D-13		6	4.5		165	6.5	596	23.5	7	9	475	1045	2.8	40	82		

VINTAGE VEHICLE TYRES

- Built to withstand rough terrain, heavy loads and harsh conditions.
- Better tyre life and fuel saving.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch		mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
5.00-19	SAMRAT	6	3.0	TT	135	5.3	746	29.3	6	8	670	1474	3.8	54	94	A8/40 kmph	A8/25 mph
6.00-19		8	3.6		160	6.3	800	31.5	7	9	925	2035	4.2	60	105		
7.00-19		10	5.0		193	7.6	860	33.8	8	10	1360	2992	5.2	74	119		
		12							8	10	1450	3190	5.4	76	121		
8.00-19		10	5.0		221	8.7	910	35.8	8	10	1650	3630	5.2	74	125		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.







Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

MILITARY JEEP OFFROAD

4x4 TYRES

- Excellent for ON/OFF Road applications and ensures good all-round performance as well as good traction and durability in ON/OFF Road applications.
- Each tyre features bias belted construction for superior strength and impact resistance, these tyres are built to handle the toughest Off-Road conditions on the planet.
- Excellent retreadability.









SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
6.00-16	MILITARY	8	4.5	TT	168	6.6	752	29.6	330	13.0	2184	86.0	12	15	690	1518	4.2	60	95	G/90 kmph	G/56 mph
7.00-16		8	5.5		196	7.7	785	30.9	366	14.4	2362	93.0	13	16	975	2145	3.8	40	107		
7.50-16		8	6.0		221	8.7	825	32.5	374	14.7	2393	94.2	13	16	1090	2376	4.2	61	111		
9.00-16	MILITARY	8	6.5	TT	244	9.6	905	35.6	424	16.7	2768	109.0	16	20	1360	2990	3.4	50	119	G/90 kmph	G/56 mph
8.25-20		14	6.0		234	9.2	925	36.4	389	15.3	2483	97.8	16	20	1600	3520	5.1	73	124		
7.50-20		8	6.0		208	8.2	930	36.6	432	17.0	2692	106.0	14	18	1450	3190	5.0	72	121		
9.00-20	MILITARY	12	7.5	TT	259	10.2	1034	40.7	483	19.0	3124	123.0	17	21	2060	4532	6.0	85	133	G/90 kmph	G/56 mph
10.00-20		12	7.5		284	11.2	1080	42.5	508	20.0	3175	125.0	19	23	2180	4790	5.1	73	135		
12.00-20		18	8.5		320	12.6	1138	44.8	524	20.6	3360	132.3	23	29	3250	7150	7.3	105	149		
12.00-24		UNDER DEVELOPEMENT																			
14.00-24		16	10.0		375	14.8	1350	53.1	610	24.0	4013	158.0	35	44	3650	8030	3.8	54	153	A8/40 kmph	A8/25 mph

MILITARY JEEP OFFROAD

4x4 TYRES

- Aggressive tread pattern provides maximum traction on various terrains.
- Reinforced sidewalls to enhance protection against impacts and cuts from obstacles and debris.
- Excellent retreadability.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.50-16	GTSW	8	6.0	TT	218	8.6	823	32.4	374	14.7	2393	94.2	12	15	1120	2664	4.2	60	112	G/90 kmph	G/56 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.







MILITARY JEEP OFFROAD

4x4 TYRES

- Built to last and provide long service life.
- Designed for all season use providing excellent performance in various weather conditions.
- Excellent retreadability.



ML-999

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
145-12M	ML-999	4	4.0	TT	145	5.7	561	22.1	260	10.2	1646	65.0	14	18	400	880	3.7	45	76	E/70 kmph	E/44 mph







MILITARY JEEP OFFROAD

4x4 TYRES

- Built to withstand rough terrain, heavy loads and harsh conditions.
- Typically constructed with high strength materials to resist punctures, tears and damage.
- Excellent retreadability.



SAND GRIP

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.50-16	SANDGRIP	12	6.0	TT	221	8.7	825	32.5	374	14.7	2393	94.2	13	16	1180	2596	5.1	73	114	B/50 kmph	B/30 mph
12.00-20		18	8.5		320	12.6	1138	44.8	524	20.6	3360	132.3	21	26	3250	7150	7.3	105	149	G/90 kmph	G/56 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

TWO WHEELER TYRES





B-1

SIZE	PR	LI	TYPE
90/90-12	-	54J	TL
100/90-17	-	55P	TL
3.00-17	6	50P	TL
2.75-18	6	50P	TL
3.00-18	6	52P	TL
100/90-18	-	56P	TL



B-3

SIZE	PR	LI	TYPE
110/90-16	-	59P	TL
110/90-17	-	60P	TL
3.25-18	6	59R	TL
3.50-18	6	62R	TL



B-5

SIZE	PR	LI	TYPE
2.75-18	6	50P	TL
3.00-18	6	52P	TL



B-7

SIZE	PR	LI	TYPE
110/90-16	-	59P	TL



F-1

SIZE	PR	LI	TYPE
2.75-17	6	49P	TL
80/100-17	-	46P	TL
90/90-17	-	49P	TL
3.00-17	6	50P	TL
2.75-18	6	50P	TL
80/100-18	-	47P	TL
90/90-18	-	51P	TL



F-3

SIZE	PR	LI	TYPE
140/70-17	-	66P	TL
150/70-17	-	69P	TL

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.



FR-1

SIZE	PR	LI	TYPE
130/70-17	-	62P	TL



COBRA

SIZE	PR	LI	TYPE
3.00-17	6	50P	TL
100/90-17	-	55P	TL
120/80-17	-	67P	TL
2.75-18	6	50P	TL
3.00-18	6	52P	TL
100/90-18	-	56P	TL



MF-101

SIZE	PR	LI	TYPE
2.50-16	6	41L	TT
2.75-17	6	49P	TL
2.50-18	6	45J	TL
2.75-18	6	50P	TT/TL
3.00-18	6	52P	TL



R-3

SIZE	PR	LI	TYPE
3.25-16	6	55P	TT
2.75-18	6	50P	TT
3.00-18	6	52P	TT



R-5

SIZE	PR	LI	TYPE
3.50-10	4	51J	TL
90/100-10	-	53J	TL
3.00-14	6	45L	TT
3.00-17	6	50P	TL
100/90-17	-	55P	TL
2.75-18	6	50P	TL
3.00-18	6	52P	TL
100/90-18	-	56P	TL
3.25-19	6	60P	TL
3.50-19	6	63P	TT



R-7

SIZE	PR	LI	TYPE
3.50-10	4	51J	TT
90/100-10	-	53J	TL
3.00-17	6	50P	TL
100/90-17	-	55P	TL
2.75-18	6	50P	TL
3.00-18	6	52P	TL
100/90-18	-	56P	TL

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.



R-8

SIZE	PR	LI	TYPE
3.00-17	6	50P	TL
2.75-18	6	50P	TL
3.00-18	6	52P	TT/TL



R-9

SIZE	PR	LI	TYPE
90/100-10	-	53J	TL
3.00-17	6	50P	TL
2.75-18	6	50P	TL
3.00-18	6	52P	TL



SW-555

SIZE	PR	LI	TYPE
3.00-17	6	50P	TT
3.00-18	6	52P	TT



CITY STAR

SIZE	PR	LI	TYPE
3.00-12	4	47J	TT
90/90-12	-	54J	TT



FR-3

SIZE	PR	LI	TYPE
110/70-12	-	47L	TL
120/70-12	-	58P	TL
130/70-12	-	62P	TL



AVANTI

SIZE	PR	LI	TYPE
3.50-10	4	51J	TT

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.



JZ-101

SIZE	PR	LI	TYPE
2.75-10	4	37J	TT
3.00-10	4	42J	TT



SW-101

SIZE	PR	LI	TYPE
3.50-8	4	46J	TT
3.50-10	4	51J	TT



SW-601

SIZE	PR	LI	TYPE
3.50-10	4	51J	TT



F-101

SIZE	PR	LI	TYPE
2.75-17	6	49P	TT
3.00-17	6	50P	TT
2.75-18	6	50P	TT
3.00-18	6	52P	TT



ER-003

SIZE	PR	LI	TYPE
3.75-12	6	66J	TT



ER-007

SIZE	PR	LI	TYPE
3.00-12	4	47J	TT
3.75-12	6	66J	TT
3.00-14	6	45L	TT

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.



RANGER / KRANTI

SIZE	PR	LI	TYPE
4.00-8	6, 8	76E, 76F	TT
4.50-10	8	85E	TT



S-401 / LOADKING

SIZE	PR	LI	TYPE
4.00-8	6, 8	76E, 76F	TT
4.50-10	8	85E	TT



S-101

SIZE	PR	LI	TYPE
4.00-8	6, 8	76E, 76F	TT



S-501

SIZE	PR	LI	TYPE
4.00-8	6, 8	76E, 76F	TT



S-601

SIZE	PR	LI	TYPE
4.00-8	6, 8	76E, 76F	TT



ST-600

SIZE	PR	LI	TYPE
4.00-10	8	85E	TT



LOAD - X

SIZE	PR	LI	TYPE
4.00-8	6	76E	TT

ATV TYRES

- Speedways ATV Tyres are suitable for all terrains.
- Handles dirt, gravel, hard packed surface and light mud with ease.
- Aggressive tread design for optimum traction.
- Excellent Performance On / Off the road.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x7.00-10	AT-01	6	5.5	TL	177	7.0	584	23.0	19	24	125	275	0.45	7.0	36	J/100 kmph	J/62 mph
23x10.50-12			8.5		254	10.0	589	23.1	19	24	165	363	0.45	7.0	45		
24x8.00-12			6.5		198	7.8	615	24.1	19	24	140	318	0.45	7.0	40		
25x8.00-12			6.5		198	7.8	638	25.1	19	24	155	341	0.45	7.0	43		
25x10.00-12	AT-01	6	8.0	TL	249	9.8	638	25.1	19	24	190	418	0.45	7.0	50	J/100 kmph	J/62 mph
26x8.00-12			6.5		204	8.0	660	26.0	28	35	175	385	0.45	7.0	47		
26x10.00-12			8.0		241	9.5	658	25.9	28	35	200	440	0.45	7.0	52		
26x12.00-12			9.5		299	11.8	658	25.9	28	35	236	519	0.45	7.0	58		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

SPEEDWAYS BUTYL TUBES



AGRICULTURE / INDUSTRIAL & OTR TUBES



SIZE	VALVE
3.50-6	TR-13 / V1-08-3 / V2.01.1
3.50-8	TR-13 / V1-08-3 / V2.01.1
4.00-8	TR-13 / V1-08-3 / V2.01.1
4.00-10	TR-13 / V2.01.1
4.50-10	TR-13 / V2.01.1
5.00-10	TR-13 / V2.01.1
5.00-12	TR-13 / V2.01.1
6.00-12	TR-13 / TR-15 / V2.01.1
7.00-12	TR-13 / TR-15 / TR-75A / V2.01.1
10.0/80-12	TR-13 / TR-15 / V2.01.1
200/60-14.5	TR-13 / TR-15 / V2.01.1
10.0/75-15.3	TR-13 / TR-15 / V2.01.1
11.5/80-15.3	TR-13 / TR-15 / V2.01.1
4.00-16	TR-15 / V2.01.2
4.50-16	TR-15 / V2.01.2
5.00-16	TR-15 / V2.01.2
5.50-16	TR-15 / V2.01.2
6.00-16	TR-15 / V2.01.2
6.00-16	TR-15 / V2.01.2
6.50-16	TR-15 / TR-75A / V2.01.2
7.00-16	TR-15 / TR-75A / V2.01.2
7.00-16	TR-218A / V4.01.1
7.50-16	TR-15 / TR-75A / V2.01.2
7.50-16	TR-218A / V4.01.1
8.25-16	TR-15 / TR-75A / V2.01.2
8.25-16	TR-218A / V4.01.1
9.00-16	TR-15 / TR-75A / V2.01.2
9.00-16	TR-218A / TR-15 / TR-75A / V4.01.1
10.00-16	TR-15 / V2.01.2
10.00-16	TR-218A / V4.01.1
10.5-16	TR-15 / V2.01.2
10.5-16	TR-218A / V4.01.1
10.5/65-16	TR-15 / V2.01.2
10.5/65-16	TR-218A / V4.01.1
9.0/70-16	TR-15 / V2.01.2
9.0/70-16	TR-218A / V4.01.1
9.0/75-16	TR-15 / V2.01.2
9.0/75-16	TR-218A / V4.01.1
250/80-16	TR-15 / V2.01.2
250/80-16	TR-218A / V4.01.1
280/70-16	TR-15 / V2.01.2
280/70-16	TR-218A / V4.01.1
10-16.5	TR-15 / V2.01.2
10-16.5	TR-218A / V4.01.1
12-16.5	TR-15 / V2.01.2
12-16.5	TR-218A / V4.01.1

SIZE	VALVE
6.00-18	TR-15 / V2.01.2
6.00-18	TR-218A / V4.01.1
7.50-18	TR-15 / V2.01.2
7.50-18	TR-218A / V4.01.1
12.5/80-18	TR-15 / V2.01.2
12.5/80-18	TR-218A / V4.01.1
13.0/65-18	TR-15 / V2.01.2
13.0/75-18	V4.01.1 / TR-218A
14.5/80-18	V4.01.1 / TR-218A
4.50-19	TR-14 / TR-15 / V2.01.2
5.00-19	TR-14 / TR-15 / V2.01.2
6.00-19	TR-14 / TR-15 / V2.01.2
7.00-19	TR-1A / V2.01.2
8.00-19	TR-14 / V2.01.2
6.00-20	TR-15 / V2.01.2
6.50-20	TR-15 / V2.01.2
7.00-20	TR-15 / V2.01.2
7.50-20	TR-15 / V2.01.2
8.00/8.3-20	TR-15 / TR-281A / V2.01.2
8.00/8.3-20	TR-218A / V4.01.1
9.50-20	TR-218A / V4.01.1
10.00-20	TR-218A / TR-78A / V4.01.1
8.3-22	TR-218A / V4.01.1
9.5-22	TR-218A / V4.01.1
8.3-24	TR-218A / V4.01.1
9.5-24	TR-218A / V4.01.1
11.2-24	TR-218A / V4.01.1
12.4-24	TR-218A / V4.01.1
13.00-24	TR-218A / V4.01.1
13.00-24	TR-218A / V4.01.1
13.00-24	TR-179A
14.00-24	TR-179A
14.00-24	TR-218A / V4.01.1
14.00-24	TRJ-1175
14.00-24	TR-218A / TR-220 / A4.01.1
13.6-24	TR-218A / V4.01.1
14.9-24	TR-218A / V4.01.1
15.5/80-24	TR-218A / V4.01.1
16.5/85-24	TR-218A / V4.01.1
14.00-25	TR-218A / V4.01.1
14.00-25	TR-179A
14.00-25	TRJ-1175
14.00-25	TR-218A / TR-220
13.6-26	TR-218A / V4.01.1
14.9-26	TR-218A / V4.01.1
23.1-26	TR-218A / TR-220A

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

AGRICULTURE / INDUSTRIAL & OTR TUBES



SIZE	VALVE
11.2-28	TR-218A / V4.01.1
12.4-28	TR-218A / V4.01.1
13.6-28	TR-218A / V4.01.1
14.9-28	TR-218A / V4.01.1
16.9-28	TR-218A / V4.01.1
16.9-30	TR-218A / V4.01.1
18.4-30	TR-218A / V4.01.1
8.3-32	TR-218A / V4.01.1
9.5-32	TR-218A / V4.01.1
11.2-36	TR-218A / V4.01.1

SIZE	VALVE
12.4-36	TR-218A / V4.01.1
11.2-38	TR-218A / V4.01.1
12.4-38	TR-218A / V4.01.1
13.6-38	TR-218A / V4.01.1
14.00-38	TR-218A / V4.01.1
14.9-38	TR-218A / V4.01.1
15.5-38	TR-218A / V4.01.1
16.9-38	TR-218A / V4.01.1
18.4-38	TR-218A / V4.01.1
20.8-38	TR-218A / V4.01.1

TWO / THREE WHEELER TUBES



SIZE	VALVE
3.50-8	V1.08.3
4.00-8	V1.08.3
90/100-10	V1.08.1
100/90-10	V1.08.1
2.50-10	V1.08.1
2.75-10	V1.08.1
3.50-10	V1.08.1
4.00-10	V1.08.1
4.50-10	TR-13 / V2.01.1
5.00-10	TR-13 / V2.01.1
3.00-12	TR-29 / V1.09.2
3.75-12	V1.08.1
90/90-12	V1.08.1
110/90-12	V1.08.1
100/80-12	V1.09.2 / TR-29 / V1.08.1
110/80-12	A 29 1 45 / V1.09.2 / TR-29 / V1.08.1
2.75/3.00-14	V1.09.2 / TR-29
2.00/2.25-16	V1.09.2 / TR-29
2.50/2.75-16	V1.09.2 / TR-29
3.00-16	V1.09.2 / TR-29
3.25-16	V1.09.2 / TR-29
3.50-16	V1.09.2 / TR-29
2.00/2.25-17	V1.09.2 / TR-29
2.50-17	V1.09.2 / TR-29
2.75/3.00-17	V1.09.2 / TR-29
90/90-17	V1.09.2 / TR-29

SIZE	VALVE
70/100-17	V1.09.2 / TR-29
100/90-17	V1.09.2 / TR-29
120/80-17	V1.09.2 / TR-29
2.25/2.50-18	V1.09.2 / TR-29
2.75/3.00-18	V1.09.2 / TR-29
4.10/4.60/4.75-18	V1.09.2 / TR-29
90/90-18	V1.09.2 / TR-29
100/90-18	V1.09.2 / TR-29
110/90-18	V1.09.2 / TR-29
110/80-18	V1.09.2 / TR-29
110/70-18	V1.08.1 / TR-29
120/70-18	V1.08.1 / TR-29
130/70-18	V1.09.1 / V1.08.1 / TR-29
130/60-18	V1.09.1 / V1.08.1 / TR-29
4.00/4.10-18	V1.09.1 / V1.08.1 / TR-29
2.75/3.00-19	V1.09.2 / TR-29
3.25/3.50-19	V1.09.2 / TR-29
110/90-19	V1.09.2 / TR-29
120/90-19	V1.08.1 / TR-29
110/80-19	V1.08.1 / TR-29
120/80-19	V1.08.1 / TR-29
130/70-19	V1.08.1 / TR-29
300/3.25-21	V1.08.1 / TR-29
80/100-21	V1.08.1 / TR-29
90/100-21	V1.08.1 / TR-29
2.75/3.00-23	V1.08.1 / TR-29

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

BUS / LIGHT TRUCK & TRUCK TUBES



SIZE	VALVE
6.50-15	TR-15 / V2.01.2
6.70-15	TR-15 / V2.01.2
7.00-15	TR-15 / TR-75A / V2.01.2
7.50-15	TR-15 / TR-75A / V2.01.2
8.15-15	TR-15 / TR-75A / V2.01.2
8.25-15	TR-15 / TR-75A / V2.01.2
8.25-15	TR-75A
6.00-16	TR-15 / V2.01.2
6.50-16	TR-15 / TR-75A / V2.01.2
7.50-16	AB 15 82 / TR-75A
8.25-16	TR-77A / TR-75A / V3.09.16
9.00-16	TR-77A / V3.09.16
10.00-16	TR-77A / V3.09.13 / TR-177A
12.00-18	TR-76A / V3.02.8

SIZE	VALVE
13.00-18	TR-76A / V3.02.8
6.50-20	TR-15
7.50-20	TR-15
8.25-20	TR-175A / V3.09.17
9.00-20	TR-175A / V3.09.17
9.00R-20	TR-175A / V3.09.17
10.00-20	TR-78A / V3.09.18
10.00R-20	TR-78A / V3.09.18
11.00-20	TR-78A / V3.09.18
11.00R-20	TR-78A / V3.09.18
12.00-20	TR-78A / V3.09.18
12.00R-20	TR-78A / V3.09.18
12.00-24	TR-78A / V3.09.18
12.00R-24	TR-78A / V3.09.18

INDUSTRIAL FORKLIFT & LIFT TRUCK TUBES



SIZE	VALVE
4.00-8	TR-87
4.00-8	JS-2
5.00-8	JS-2
5.00-8	TR-87
5.00-10	JS-2
5.00-10	TR-13
5.00-10	JS-2
6.50-10	V1.08.1 / TR-15
6.50-10	JS-2
6.50-10	TR-75A
7.00-12	TR-75A
7.00-12	JS-2
23X5	TR-87
23X5	JS-2
2.15-15	JS-2
7.00-15	TR-78A / TR-15
7.00-15	JS-2
7.50-15	TR-75A
7.50-15	JS-2
8.15-15	TR-75A
8.15-15	JS-2
8.25-15	TR-15 / TR-75A / B 35 5 57 / V2.01.2
8.25-15	JS-2

SIZE	VALVE
250-15	JS-2
250-15	TR-15
300-15	TR-75A / TR-78A
300-15	JS-2
9.00-20	V3.04.5 / TR-78A / TR-175A
10.00-20	V3.04.5 / TR-78A
11.00-20	V3.04.5 / TR-78A
12.00-20	V3.04.5 / TR-78A

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

PASSENGER CAR TUBES



SIZE	VALVE
145-10	TR-13 / V2.01.1
125/135-12	TR-13 / V2.01.1
125/135-12	TR-13 / V2.01.1
145/70R-12	TR-13 / V2.01.1
135/80R-12	TR-13 / V2.01.1
175/70R-12	TR-13 / V2.01.1
155/80D-12	TR-13 / V2.01.1
155/80R-12	TR-13 / V2.01.1
135/70R-13	TR-13 / V2.01.1
135R/145R-13	TR-13 / V2.01.1
140/150R-13	TR-13 / V2.01.1
145/70R-13	TR-13
145/70R-13	TR-13 / V2.01.1
155/165R-13	TR-13 / V2.01.1
165/65R-13	TR-13 / V2.01.1
175/80R-13	TR-13 / V2.01.1
175R/185R-13	TR-13 / V2.01.1
135/70R-13	TR-13 / V2.01.1
145R/70-13	TR-13 / V2.01.1
155/70R-13	TR-13 / V2.01.1
165/70R-13	TR-13 / V2.01.1
175/70R-13	TR-13 / V2.01.1
6.00/6.50-13	TR-13 / V2.01.1
135R/145R-14	TR-13 / V2.01.1
145/70R-14	TR-13 / V2.01.1
140R/150R-14	TR-13 / V2.01.1
155R/165R-14	TR-13 / V2.01.1
175/70R-14	TR-13 / V2.01.1
4.00/4.50-14	TR-13 / V2.01.1
165/175/70R-14	TR-13 / V2.01.1
175/185R-14	TR-13 / V2.01.1
195/205R-14	TR-13 / V2.01.1
165/175/65R-14	TR-13 / V2.01.1
165/175/70R-14	TR-13 / V2.01.1
185/70R-14	TR-13 / V2.01.1
195/70R-14	TR-13 / V2.01.1
170R/180R-14	TR-13 / V2.01.1
195R/205R-14	TR-13 / V2.01.1
205/70R-14	TR-13 / V2.01.1
205/80R-14	TR-13 / V2.01.1
125R-15	TR-13 / V2.01.1
135R/145R-15	TR-13 / V2.01.1
145/70R-15	TR-13 / V2.01.1
140R/150R-15	TR-13 / V2.01.1

SIZE	VALVE
155R/165R-15	TR-13 / V2.01.1
175/70R-15	TR-13 / V2.01.1
160/R-15	TR-13 / V2.01.1
125-15	TR-13 / V2.01.1
4.00/4.50-15	TR-13 / V2.01.1
5.00-15	TR-13 / V2.01.1
5.90-15	TR-13 / V2.01.1
F78-15	TR-13 / V2.01.1
175/185R-15	TR-13 / V2.01.1
165/175/70R-15	TR-13 / V2.01.1
175/185/70R-15	TR-13 / V2.01.1
175/185/70R-15	TR-13 / V2.01.1
195/205R-15	TR-13 / V2.01.1
205/70R-15	TR-13 / V2.01.1
215/225/235/70R-15	TR-13 / V2.01.1
215/225R-15	TR-13 / V2.01.1
235/75R15	TR-13 / V2.01.1
235/70R15	TR-13 / V2.01.1
225/70R15	TR-13 / V2.01.1
255/70R15	TR-13 / V2.01.1
175/185R-16	TR-13 / V2.01.1
195/205/215/70R-16	TR-13 / V2.01.1
195/205/215/70R-16	TR-13 / V2.01.1
175R/185R-16	TR-15
195R/205R-16	TR-15
215R/225R-16	TR-15

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

IMPLEMENT & TRAILER TUBES



SIZE	VALVE
6.70-15	TR-15 / B 35 5 57 / V2.01.2
7.60-15	TR-15 / V2.01.2, TR-75AA97 5 82 / V3.09.13
9.5L-15	TR-75 A / V3.09.13
11L-15	TR-15 / B 35 5 57 / V2.01.2, TR-218A / V4.01.1
12.5L-15	TR-15 / B 35 5 57 / V2.01.2, TR-218A / V4.01.1

SIZE	VALVE
10.0/75-15.3	TR-15 / B 35 5 57 / V2.01.2, TR-218A / V4.01.1
11.5/80-15.3	TR-15 / B 35 5 57 / V2.01.2, TR-218A / V4.01.1
11L.16	TR-15 / V2.01.2, TR - 75A / V3.09.13 TR-77A / AC3 5 82 / V3.09.16
12.5L-16	TR-15 / V2.01.2

UTILITY VEHICLE TUBES



SIZE	VALVE
145-10	TR-13 / V2.01.1
5.00-10	TR-13 / V2.01.1
4.50-12	TR-13 / V2.01.1
5.00-12	TR-13 / V2.01.1
145/80D-12	TR-13 / V2.01.1
155/80D-12	TR-13 / V2.01.1

SIZE	VALVE
155/80R-12	TR-13 / V2.01.1
165/70R-13	TR-13 / V2.01.1
165/70-13	TR-13 / V2.01.1
165/175/70-14	TR-13 / V2.01.1
195/205R-14	TR-13 / V2.01.1
185R-16	TR-13 / V2.01.1

LAWN & GARDEN TUBES



SIZE	VALVE
2.50/2.80-4	TR-87
3.00-4	TR-87
4.00-4	TR-87
4.10/3.50-5	TR-13
11x4.00-5	TR-13
11x6.00-5	TR-87
3.50/4.00-6	TR-13 / TR-87
13x.5.00-6	TR-13 / TR-87

SIZE	VALVE
15x.6.00-6	TR-13
3.50.-7	TR-13
4.00-7	TR-13
3.00/3.25-8	TR-13
3.50-8	TR-13
145/70-8	TR-13
16x6.50-8	TR-13
18x8.50-8	TR-13

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.



SIZE
5.00-8
6.00-9
6.50-10
7.00-12
8.25-15
6.00-16
6.50-16
7.00-16
7.50-16
8.25-16
9.00-16

SIZE
7.50-20
8.25-20
9.00-20
10.00-20
11.00-20
12.00-20
12.00-24
13.00-24
14.00-24
14.00-25
18.00-25

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

ISO 9001:2015



ISO/IEC 17025:2017




IATF 16949:2016



ECE-106R



DOT

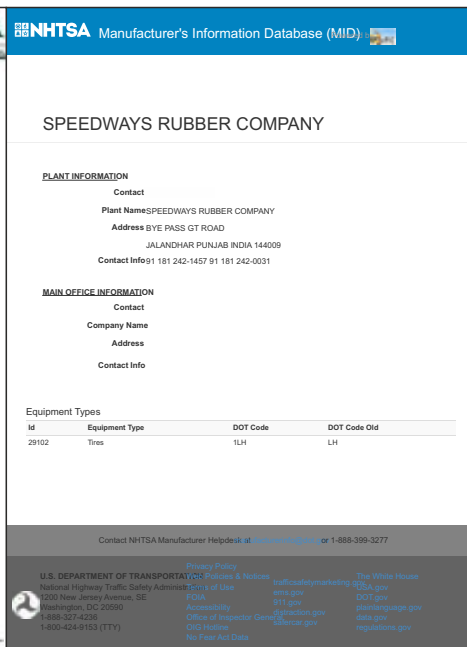

BIS




SPEEDWAYS RUBBER COMPANY

**Suchi Pind, By Pass, G.T. Road
Jalandhar-144009
(INDIA)**

Website : www.speedwaystyres.com

e-mail : sales@speedwaystyres.com

 : +91-98880-45000

INDUSTRIAL / OTR TYRES



DRIVE WHEEL TYRES (R-3)

- Tread specially designed to give minimum ground disturbance.
- Suitable for use on orchards, soft soil, road construction and similar applications.



SIZE	PATTERN	PLY RATING	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch			mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			mm	inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		mm	inch
14.9-24	SW-333	8	13.0		TL	378	14.9	1262	49.7	574	22.6	3835	151.0	19	24	1800	3960	1.8	26	128	A6/30 kmph	A6/20 mph
		10												2000	4400	2.1	30	132				
		12												2240	4928	2.4	35	136				
23.1-26	SW-333	8	20.0		TL	587	23.1	1560	61.4	686	27.0	4547	179.0	28	36	2900	6380	1.1	16	145	A6/30 kmph	A6/20 mph
		12												3650	8030	1.7	24	153				
		16												4375	9625	2.2	32	159				
18.4-26	SW-333	12	16.0		TL	475	18.7	1430	56.3	635	25.0	4140	163.0	24	30	3000	6600	2.3	33	146	A6/30 kmph	A6/20 mph
		16												3550	7810	2.8	41	152				
13.6-28	SW-333	8	12.0		TL	345	13.6	1318	51.9	587	23.1	3835	152.0	18	22	1650	3630	2.0	29	125	A6/30 kmph	A6/20 mph
		10												1850	4070	2.2	32	129				
		12												2060	4530	2.5	36	133				

EXCAVATOR TYRES

- Speedways Excavator Tyres are designed for heavy duty service.
- Specially engineered tread pattern provides excellent traction, good self cleaning as well as good on the road drive ability.



SIZE	PATTERN	PLY RATING	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD	LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED		
			inch			mm	inch	mm	inch	mm	inch	mm	inch		50KPH / 30MPH MAX LOAD	kg	lbs	bar		psi	kmph	mph
			STD.	ALT.		mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	mm	inch		mm	inch	
8.25-20	EV-999	14	6.5	7.0	TT	236	9.3	980	38.6	457	18.0	2972	117.0	20	25	2065	4545	6.8	98	133	B/50 kmph	B/30 mph
9.00-20		14	7.0	7.5		257	10.1	1039	40.9	483	19.0	3073	121.0	22	27	2500	5500	7.0	102	140		
10.00-20		16	7.5	8.0		277	10.9	1075	42.3	508	20.0	3175	125.0	21	26	3000	6600	7.6	110	146		





* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

INDUSTRIAL FORKLIFT TYRES

- Premium tyre, designed for heavy duty service on forklift trucks, material handling and mining equipment.
- The deep tread, extra thick sidewalls and touch casing provide exceptional durability and minimize the risk of puncture and accidental damages.
- Silica and natural rubber in tread compound provides greater chip and rear resistance.
- Specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.







SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.80/4.00-8	LIFTKING HD	8	3.0	TT	117	4.6	414	16.3	8	10	530	1165	10.0	145	86	A6/30 kmph	A6/20 mph
5.70/5.00-8		10	3.0		132	5.2	467	18.3	14	18	1400	3080	9.8	142	120		
6.90/6.00-9		10	4.0		160	6.3	540	21.2	16	20	1700	3740	8.3	120	126		
6.50-10	LIFTKING HD	12	5.0	TT	178	7.0	588	23.1	16	20	2180	4796	8.8	128	135	A6/30 kmph	A6/20 mph
7.00-12		14	5.0		192	7.6	690	27.1	18	23	2725	5995	8.9	128	143		
7.00-15		12	5.5		201	7.9	762	30.0	16	20	3075	6765	8.6	125	147		
7.50-15	LIFTKING HD	14	6.0	TT	211	8.3	772	28.3	18	23	3000	6600	9.0	130	146	A6/30 kmph	A6/20 mph
28x9-15		14	7.0		213	8.4	720	33.7	18	23	3875	8525	9.8	142	155		
8.25-15		16	6.5		239	9.4	855	33.6	18	23	3550	7810	9.1	131	152		

INDUSTRIAL FORKLIFT TYRES

- Unique lug design for extra surface for highest mileage.
- Cut and crack resistant tread compound.



SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x5	LIFTPower	10	4.0	TT	155	6.1	635	25.0	10	13	2000	4400	8.0	114	132	A6/30 kmph	A6/20 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL SOLID TYRES

- Long tyre life with consistent performance.
- Low heat build-up and rolling resistance .
- Perfect driving comfort.



SIZE	PATTERN	TYPE	RIM WIDTH 	SECTION WIDTH 		OVERALL DIAMETER 		LOAD CAPACITY 					
				inch	mm	inch	mm	inch	mm	Load wheel		Steer wheel	
								kg	lbs	kg	lbs		
4.00-8	SL-555	STD/LIP	3.0	406	16.0	99	3.9	950	2090	730	1606		
5.00-8			3.0	455	17.9	124	4.9	1420	3124	1090	2398		
15x4 1/2-8			3.0	386	15.2	114	4.5	1040	2288	800	1760		
16x6-8			4.3	406	16.0	163	6.4	1495	3289	1150	2530		
18x7-8			4.3	457	18.0	150	5.9	2145	4719	1650	3630		
6.00-9	SL-555	STD/LIP	4.0	523	20.6	142	5.6	1885	4147	1450	3190		
140/55-9			4.0	391	15.4	142	5.6	1170	2574	900	1980		
21x8-9			6.0	526	20.7	193	7.6	2755	6061	2120	4664		
6.50-10			5.0	577	22.7	160	6.3	2340	5148	1800	3960		
7.50-10			5.5	653	25.7	180	7.1	3070	6754	2360	5192		
200x50-10	SL-555	STD/LIP	6.5	452	17.8	188	7.4	2470	5434	1900	4180		
23x9-10			6.5	572	22.5	211	8.3	3445	7579	2650	5830		
7.00-12			5.0	645	25.4	175	6.9	2920	6424	2240	4928		
23x10-12			8.0	592	23.3	245	9.7	3770	8294	2900	6380		
27x10-12			8.0	650	25.6	249	9.8	3900	8580	3000	6600		
7.00-15	SL-555	STD/LIP	5.5	701	27.6	191	7.5	3545	7799	2725	5995		
7.50-15			5.5	719	28.3	191	7.5	3900	8580	3000	6600		
250-15			7.0	734	28.9	236	9.3	4750	10450	3650	8030		
8.15-15			7.0	688	27.1	213	8.4	3445	7579	2650	5830		
8.25-15			6.5	780	30.7	201	7.9	4750	10450	3650	8030		
300-15	SL-555	STD/LIP	8.0	820	32.3	257	10.1	5850	12870	4500	9900		
28x12.5-15			9.7	688	27.1	315	12.4	5525	12155	4250	9350		
355/65-15			9.7	820	32.3	300	11.8	7800	17160	6000	13200		
7.50-16			5.5	782	30.8	201	7.9	3908	8598	2831	6228		
8.00-16			UNDER DEVELOPMENT										
7.50-20	SL-555	STD/LIP	6.0	883	34.7	179	7.1	3840	8448	3200	7040		
8.25-20			7.0	988	38.9	231	9.1	4400	9680	3675	8085		
9.00-20			UNDER DEVELOPMENT										
9.00-20			7.0	1026	40.4	241	9.5	5340	11748	4450	9790		
9.00-20			7.5	1026	40.4	241	9.5	5340	11748	4450	9790		
10.00-20	SL-555	STD/LIP	7.5	1026	40.4	241	9.5	6000	13200	5000	11000		
10.00-20			8.0	1026	40.4	241	9.5	6000	13200	5000	11000		
11.00-20			8.0	1052	41.4	263	10.4	6510	14322	5245	11540		
12.00-20			8.5	1102	43.4	295	11.6	7500	16500	6250	13750		
12.00-20	UNDER DEVELOPMENT												
12.00-24	SL-555	STD/LIP	8.5	1194	47.0	300	11.8	8000	17600	6650	14630		
12.00-24			10.0	1194	47.0	300	11.8	8000	17600	6650	14630		
14.00-24			10.0	1300	51.2	335	13.2	11000	24200	9175	20185		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL / OTR TYRES









SKID STEER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life. Extra thick side wall with rim guard gives protection against damage.



MONSTER L-5







SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x8.50-12	MONSTER L-5	8	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	19	24	690	1518	3.5	50	90	A6/30 kmph	A6/18 mph
27x8.50-15		10	7.0		218	8.6	676	26.6	305	12.0	2006	79.0	23	29	1000	2200	4.3	61	106		
10.0/75-15.3		14	9.0		259	10.2	775	30.5	356	14.0	2311	91.0	34	43	2120	4664	4.7	68	134		
10-16.5	MONSTER L-5	12	8.25	TL	259	10.2	798	31.4	366	14.4	2337	92.0	37	46	2180	4796	4.4	64	135	A8/40 kmph	A8/20 mph
12-16.5		14	9.75		307	12.1	838	33.0	384	15.1	2515	99.0	37	46	2765	6083	4.8	70	144		
14-17.5		14	10.5		358	14.1	935	36.8	427	16.8	2743	108.0	36	45	2650	5830	5.5	80	142		

SKID STEER TYRES

- Deep tread, extra thick sidewall and tough casing ensure longer life. Silica & natural rubber base compound provides greater chip & tear resistance.



ROCK PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	ROCK PLUS HD	12	8.25	TL	268	10.5	790	31.1	356	14.0	2286	90.0	30	38	2120	4664	5.1	74	134	A8/40 kmph	A8/25 mph
12-16.5		14	9.75	TL	325	12.8	866	34.1	381	15.0	2438	96.0	34	42	2240	4928	6.2	90	136		
10.00-20		18	8.25	TT	284	11.2	1080	42.5	508	20.0	3175	125.0	31	39	6500	14300	8.3	118	173	A8/40 kmph	A8/25 mph
		20			6900										15180	9.8	142	175			
12.00-20		20	8.50	TT	320	12.6	1151	45.3	530	20.9	3390	133.5	35	44	7750	17050	9.0	130	179	A6/30 kmph	A6/18 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

SKID STEER TYRES

- Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs heavier sidewall.



STEERKING HD+

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING HD+	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	17	21	1550	3410	5.1	74	123	A8/40 kmph	A8/25 mph
		12											17	21	1700	3740	5.2	75			
12-16.5		12	9.75	TL	325	12.8	853	33.6	381	15.0	2438	96.0	20	25	2060	4532	5.4	78	133		
		14											20	25	2300	5060	6.2	90	137		

SKID STEER TYRES

- Wide wall tyres with side wall and rim guard protectors, meant for the value conscious performance oriented applications.



STEERKING +

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING +	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	14	17	1560	3432	5.1	74	123	A8/40 kmph	A8/25 mph
		12											14	17	1650	3630	5.2	75			
12-16.5		12	9.75	TL	312	12.3	825	32.5	381	15.0	2438	96.0	16	20	1850	4070	4.4	64	129		
		14											16	20	2120	4664	4.8	70	134		







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

SKID STEER TYRES

- Premium tyre with extra deep tread and thick sidewalls providing better traction, puncture resistance and longer life. Specially designed rim guard ensures greater protection against flats and wheel damage in the rim flange area.



STEER PLUS HD







SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x8.50-12	STEER PLUS HD	6	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	13	16	600	1320	3.3	48	90	A8/40 kmph	A8/25 mph
27x8.50-15		8	7.0		218	8.6	676	26.6	305	12.0	2006	79.0	13	16	950	2090	4.1	60	106		
31.5x13-16.5		14	9.75		328	12.9	803	31.6	356	14.0	2337	92.0	19	24	2430	5346	4.7	68	139		
33x15.5-16.5		14	13.0		394	15.5	838	33.0	381	15.0	2464	97.0	19	24	3150	6930	5.1	74	148		
14-17.5	STEER PLUS HD	14	10.5	TL	348	13.7	940	37.0	406	16.0	2743	108.0	25	31	2650	5830	5.5	80	142	A6/30 kmph	A6/18 mph
15-19.5		14	11.75		401	15.8	1036	40.8	457	18.0	3048	120.0	25	31	3350	7370	4.8	70	150	A8/40 kmph	A8/25 mph

SKID STEER TYRES

- Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs heavier sidewall.



ROCKMASTER

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	ROCKMASTER	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	17	21	1950	4290	4.1	60	131	A8/40 kmph	A8/25 mph
12		17											21	2180	4796	5.2	75	135			
12-16.5		12	9.75	TL	325	12.8	853	33.6	381	15.0	2438	96.0	20	25	2360	5192	4.1	60	138		
		14											20	25	2800	6160	4.9	71	144		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL / OTR TYRES



GRADER TYRES

- Rugged sturdy tyres for drive wheels of off-the-road equipment.
- Tough carcass and special trade compound with weather and ozone resistant properties to withstand cuts, snags and bruises in the most severe operating conditions.
- An open spaced traction pattern with self cleaning property provides traction capability, ideally suited for graders.



POWERGRIP G-2

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
13.00-24	POWERGRIP G-2	12	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	26	32	2725	5995	3.0	44	143	A8/40 kmph	A8/25 mph
		16											32	3250	7150	3.9	57	149			
14.00-24		12	10.0		26	32	3075	6750	2.4	35	147										
		16			26	32	3650	8030	3.4	50	153										
15.5/80-24		16	12.0		384	15.0	1262	50.0	570	23.0	3875	153.0	28	35	6825	15015	4.0	58	151		
440/80-24	POWERGRIP G-2	16	14.0	TL	440	17.3	1320	52.0	597	23.5	3950	155.5	26	32	5600	12320	5.0	73	168	A8/40 kmph	A8/25 mph
15.5-25		12	12.0										25	31	2650	5830	2.5	36	142		
		16											25	31	3250	7150	3.1	45	149		
17.5-25		12	14.0										26	32	2900	6380	3.5	50	145		
		16											26	32	3350	7370	3.9	56	150		

GRADER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life. Extra thick side wall with rim guard gives protection against damage.



MONSTER

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
13.00-24	MONSTER G-5	16	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	34	43	3250	7150	4.0	58	149	A8/40 kmph	A8/25 mph
14.00-24		16	10.0										35	44	3650	8030	3.7	54	153		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.







INDUSTRIAL / OTR TYRES



EARTHMOVER & PORT TYRES

- The special non-directional tread design formulated with silica based tread compound, together with a heavy duty nylon carcass makes it capable of withstanding cuts, snags and bruises under all service conditions.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.00-20	ROCK LUG E-3	18	7.5	TT	259	10.2	1035	42.7	476	18.7	3056	120.3	20	25	2650	5830	6.8	99	136	B/50 kmph	B/30 mph
10.00-20		20	8.0		274	10.8	1075	42.3	494	19.4	3171	124.8	26	33	2725	5995	7.5	109	143		
11.00-20		18	8.0		297	12.0	1115	44.0	529	22.0	3368	137.0	31	39	3000	6600	7.6	110	-		
17.5/65-20	ROCK LUG E-3	14	14.0	TL	450	17.7	1090	42.9	483	19.0	3302	130.0	26	33	3250	7150	2.4	35	149	A8/40 kmph	A8/25 mph
		16			26	33	3450	7590	2.8	40	151										
14.00-24	ROCK LUG E-3	24	10.0	TL	373	14.7	1368	53.8	635	25.0	4039	159.0	27	34	9500	20900	8.3	120	186	A2/10 kmph	A2/6 mph
		28	27		34	10300	22660	9.1	132	189											
16.9-24	ROCK LUG E-3	12	15.0	TL	460	18.1	1310	52.5	584	23.0	3785	149.0	27	34	3150	6930	2.8	40	148	A2/10 kmph	A2/6 mph
		16											27	34	3875	8525	3.3	48	155		
		20											27	34	4750	10450	3.6	52	162		
17.5L-24	ROCK LUG E-3	12	15.0	TL	462	18.2	1280	50.0	559	22.0	3683	145.0	28	35	3908	8598	3.3	47	155	A2/10 kmph	A2/6 mph
		24											27	34	9500	20900	8.3	120	186		
14.00-25	ROCK LUG E-3	24	10.0	TL	375	14.8	1374	54.1	635	25.0	4039	159.0	27	34	10600	23320	8.4	122	190	A2/10 kmph	A2/6 mph
		28	27										34	5600	12320	4.0	57	168			
15.5-25	ROCK LUG E-3	12	12.0	TL	394	15.5	1278	50.3	569	22.4	3658	144.0	27	34	6300	13860	4.3	62	172	A2/10 kmph	A2/6 mph
		16											27	34	6900	15180	4.5	65	175		
		18											27	34	7300	16060	4.8	70	177		
		20											32	39	7300	16060	4.6	67	177		
17.5-25	ROCK LUG E-3	16	14.0	TL	432	17.0	1344	52.9	635	25.0	3955	156.0	32	39	8250	18150	5.5	80	181	A2/10 kmph	A2/6 mph
		20											32	39	8500	18700	5.9	85	182		
		24											32	39	9750	21450	6.2	90	187		
		28											68	85	20950	46090	10.3	150	214		
18.00-25	ROCK LUG E-3	32	13.0	TL	510	20.1	1615	63.6	739	29.1	4780	188.2	68	85	22950	50490	9.0	131	217	A2/10 kmph	A2/6 mph
		40											68	85	9500	20900	4.4	64	186		
20.5-25	ROCK LUG E-3	20	17.0	TL	531	20.9	1486	58.5	686	27.0	4394	173.0	31	39	10300	22660	5.3	76	189	A2/10 kmph	A2/6 mph
		24	31										39	6700	14740	4.0	58	174			
		24	31										39	11800	25960	5.4	78	194			
		28	31										39	7500	16500	4.2	60	178			
		28	31										39	9500	20900	4.4	64	186			
23.5-25	ROCK LUG E-3	20	19.5	TL	599	23.6	1610	63.4	749	29.5	4854	191.1	35	44	10900	23980	3.7	53	191	A2/10 kmph	A2/6 mph
		24	35										44	12500	27500	4.7	67	196			
		24	35										44	8500	18700	3.8	55	182			
		28	35										44	13200	29040	4.9	70	198			
		28	36										45	9000	19800	3.0	40	184			
		28	36										45	15500	34100	4.8	70	203			

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.









AGRICULTURE
TYRES

DRIVE WHEEL TYRES (R-2)

- Extra deep tread specially designed to get excellent traction on wet and sticky soil with excellent self cleaning properties, preventing mud clogging between lugs.
- Tough tread compound to resist extreme conditions.



SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
12.4-24	TR-2	8	11.0	TT	315	12.4	1195	47.0	550	21.7	3722	146.5	61	76	1450	3190	2.3	33	121	A6/30 kmph	A6/20 mph
		12											1800	3960	2.8	40	128				
14.9-24	TR-2	8	13.0	TT	380	15.0	1310	51.6	595	23.4	4044	159.2	61	76	1800	3960	1.8	26	128	A6/30 kmph	A6/20 mph
		12											2180	4795	2.3	33	135				
13.6-28	TR-2	8	12.0	TT	350	13.8	1325	52.2	615	24.2	4015	158.1	65	82	1650	3630	2.0	30	125	A6/30 kmph	A6/20 mph
		12											2120	4664	3.0	44	134				
14.9-28	TR-2	12	13.0	TT	388	15.0	1380	54.0	642	25.0	4176	164.0	40	50	2300	5060	2.6	38	137	A6/30 kmph	A6/20 mph
18.4-30	TR-2	8	16.0	TT	465	18.3	1580	62.2	711	28.0	4724	186.0	71	89	2430	5345	1.4	20	139	A6/30 kmph	A6/20 mph
		10											2900	6380	2.0	30	145				
		12											3250	7150	2.3	33	149				
		14											3450	7590	2.6	38	151				
18.4-34	TR-2	8	16.0	TT	465	18.3	1682	66.2	762	30.0	5029	198.0	71	89	2650	5830	1.4	20	142	A6/30 kmph	A6/20 mph
		10											3000	6600	1.8	26	146				
		12											3450	7590	2.2	32	151				
		14											3550	7810	2.6	38	152				







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

BIAS TRACTOR

FRONT TYRES

- Penetrates deep into soil for maximum steering control and minimal lateral side-slip because of its high center rib.
- Best for handling heavy loads on hard-packed surfaces.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
3.50-6	F-2	4	2.5	TT	99	3.9	343	13.5	214	8.4	1341	52.8	9	11	165	363	2.7	38	45	A8/40 kmph	A8/25 mph
3.50-8		4	2.5		101	4.0	371	14.6	218	8.6	1390	54.7	10	13	185	407	2.7	38	49		
4.00-8		4	3.0		112	4.4	430	16.9	224	8.8	1430	56.3	10	13	224	493	2.8	40	56		
4.00-12		4	3.0		112	4.4	530	20.8	254	10.0	1626	64.0	11	14	300	660	2.8	40	66		
4.00-15	F-2	4	3.0	TT	112	4.4	610	24.0	295	11.6	1854	73.0	9	11	307	675	2.8	40	67	A8/40 kmph	A8/25 mph
5.00-15		6	4.0		140	5.5	655	25.8	305	12.0	1956	77.0	13	16	475	1045	3.7	54	82	A6/30 kmph	A6/20 mph
4.00-16		4	3.0		112	4.4	640	25.2	305	12.0	1956	77.0	11	14	325	715	3.3	48	69	A8/40 kmph	A8/25 mph
4.50-16	F-2	6	3.0	TT	122	4.8	665	26.2	305	12.0	1956	77.0	11	14	365	803	3.2	47	73	A8/40 kmph	A8/25 mph
5.00-16		6	4.0		140	5.5	680	26.8	330	13.0	2032	80.0	11	14	400	880	3.3	48	76	A6/30 kmph	A6/20 mph
5.50-16		6	4.0		150	5.9	710	27.9	330	13.0	2083	82.0	13	16	425	935	3.3	48	78	A8/40 kmph	A8/25 mph
6.00-16		8	4.5		165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.4	64	94	A6/30 kmph	A6/20 mph
6.50-16		8	4.5		175	6.8	760	29.9	356	14.0	2286	90.0	12	15	750	1650	3.3	48	98	A8/40 kmph	A8/25 mph
7.50-16	F-2	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	15	18	875	1925	3.7	54	103	A6/30 kmph	A6/20 mph
		12			15	18	1150	2530	4.7	68	113	A8/40 kmph	A8/25 mph								
9.00-16		10	7.0	TT/TL	234	9.2	854	33.6	406	16.0	2540	100.0	16	20	1250	2750	3.8	55	116	A8/40 kmph	A8/25 mph
10.00-16		10	7.0		275	10.8	900	35.4	406	16.0	2692	106.0	19	24	1360	2992	2.8	41	119	A6/30 kmph	A6/20 mph
11.00-16		12	10		320	12.6	970	38.1	457	18.0	2896	114.0	24	30	1600	3520	2.5	36	124	A8/40 kmph	A8/25 mph
7.50-18	F-2	8	5.5	TT	204	8.0	867	34.2	406	16.0	2565	101.0	16	20	950	2090	3.7	54	106	A6/30 kmph	A6/20 mph
		12			16	20	1350	2970	3.9	57	119	A8/40 kmph	A8/25 mph								
4.00-19		6	3.0		112	4.4	712	28.0	330	13.0	2134	84.0	11	14	355	781	3.4	48	72	A6/30 kmph	A6/20 mph
6.00-19		8	4.5		165	6.5	814	32.0	381	15.0	2413	95.0	13	16	615	1353	3.3	48	91	A8/40 kmph	A8/25 mph
6.50-20	F-2	8	4.5	TT	173	6.8	864	34.0	406	16.0	2565	101.0	14	17	850	1870	3.3	48	102	A6/30 kmph	A6/20 mph
7.50-20		8			5.5	203	8.0	920	36.2	432	17.0	2718	107.0	18	22	1030	2266	3.5	50	109	A6/30 kmph
		12												18	22	1320	2904	4.0	58	118	

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

ALL TERRAIN TRACTION TYRES

- Broad lugs and deep tread suitable for better soil tillage.
- Excellent self cleaning properties.



GRIPKING HD

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED				
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph			
6.5/80-12	GRIPKING HD	6	5.0	TT	165	6.5	590	23.2	279	11.0	1753	69.0	17	21	710	1562	3.6	52	96	A8/40 Kmph	A8/25 mph			
6.5/80-13		6	5.0	TT	170	6.7	640	25.1	279	11.0	1753	69.0	16	20	750	1650	3.4	50	98	A6/30 kmph	A6/20 mph			
10.0/75-15.3		10	9.0	TL	267	10.5	780	30.7	356	14.0	2286	90.0	26	32	1550	3410	3.9	57	123	A8/40 Kmph	A8/25 mph			
		14			26	32	1900	4180	5.4	78	130													
11.5/80-15.3		10	9.0	TL	290	11.4	867	34.1	381	15.0	2540	100.0	24	30	1950	4290	4.4	64	131	A8/40 Kmph	A8/25 mph			
		14			24	30	2430	5346	6.5	69	139													
9.0/70-16		GRIPKING HD	10	8.0	TL	226	8.8	745	29.3	354	13.9	2540	100.0	25	31	1350	2970	4.3	62	119	A8/40 kmph	A8/25 mph		
9.0/75-16			10	8.0		229	9.0	774	30.4	355	14.0	2545	100.2	25	31	1390	3058	4.4	64	120				
250/80-16			10	8.0		240	9.4	816	32.1	369	14.5	2412	95.0	25	31	1460	3212	3.0	44	121				
			14			25	31	1600	3520	3.3	48	124												
260/70-16	10		8.0	257		10.1	775	30.5	356	14.0	2550	100.4	25	31	1030	2266	2.3	34	109					
	14			25		31	1215	2675	2.8	40	115													
280/70-16	10		9.0	TL		280	11.0	807	31.7	357	14.1	2560	100.8	25	31	1120	2464	2.4	34	112			A8/40 kmph	A8/25 mph
	14					25	31	1360	2990	2.9	42	119												
9.5-16	8		7.0	TT		241	9.4	840	33.3	358	14.1	2565	101.0	26	32	1100	2420	2.1	30	112			A8/40 kmph	A8/25 mph
15.0/55-17	10		13.0	TL		380	14.9	872	34.3	377	14.8	2490	98.0	23	29	2120	4664	3.5	51	134			A8/40 kmph	A8/25 mph
	14	23			29	2575	5665	4.9	71	141														
19.0/45-17	14	16.0	TL	491	19.3	875	34.4	381	15.0	2565	101.0	27	34	3000	6600	3.8	55	146	A8/40 kmph	A8/25 mph				
	18			27	34	3550	7810	4.1	60	152														
400/55-17.5	14	13.0	TT/TL	400	15.7	800	31.5	390	15.3	2585	101.8	23	29	2900	6380	3.6	52	144	A8/40 kmph	A8/25 mph				
8-18	6	6.0	TT	203	8.0	840	33.0	381	15.0	2515	99.0	21	26	615	1353	1.9	27	91						
10.5/80-18	10	9.0	TL	274	10.7	907	35.7	406	16.0	2667	105.0	24	30	1950	4290	3.6	52	131						
11.5/80-18	GRIPKING HD UNDER DEVELOPMENT																							
12.5/80-18	12	9.0	TL	308	12.1	987	38.8	432	17.0	2896	114.0	24	30	2650	5830	3.6	52	142	A8/40 kmph	A8/25 mph				
250/80-18	10	8.0		251	9.9	857	33.7	406	16.0	2667	105.0	24	30	1600	3520	3.7	54	124						
	14			24	30	1900	4180	4.0	58	130														
275/80-18	10	8.0		275	10.8	906	35.6	406	16.0	2667	105.0	24	30	1650	3630	3.7	54	125						
	14			24	30	1900	4180	3.8	55	130														
280/70-18	10	9.0		280	11.0	849	33.4	406	16.0	2667	105.0	24	30	1180	2595	2.3	34	114						
	14			24	30	1950	4290	3.8	55	131														
6.50-20	8	4.5		TT	175	6.8	865	34.0	409	16.1	2578	101.5	16	20	825	1815	2.8	41			101	A6/30 kmph	A6/20 mph	
7.50-20	8	6.0			214	8.4	904	35.5	432	17.0	2692	106.0	21	27	1360	2992	3.2	46			119			
9.5-20	8	7.0			241	9.5	955	37.6	449	17.7	2942	115.8	27	34	975	2145	2.8	41			107			
16.0/70-20	10	14.0	418		16.4	1097	43.1	483	19.0	3226	127.0	29	36	3075	6765	3.4	50	147						
	14		29	36	3750	8250	4.8	70	154															

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

INDUSTRIAL / OTR TYRES



RADIAL INDUSTRIAL TYRES

- Suitable for backhoe loader.
- Provide great traction in drive wheels.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD			bar	psi	kmph	mph
															kg	lbs	kg	lbs					
460/70R-24 17.5L R-24 159 A8/B	IND-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	41	51	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph
500/70R-24 19.5L R-24 164 A8/B		DW 16L	DW 15L DW 18L		485	19.1	1321	52.0	584	23.0	3950	155.5	43	53	5000	11000	5000	11000	4.0	58	164		

STEEL BELTED RADIAL INDUSTRIAL TYRES

- Suitable for backhoe loader.
- Provide great traction in drive wheels.
- Extra strength and stability.
- Special tread compound for cut and heat resistance.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD			bar	psi	kmph	mph
															kg	lbs	kg	lbs					
460/70R-24 17.5L R-24 159 A8/B	IND-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	41	51	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph
500/70R-24 19.5L R-24 164 A8/B		DW 16L	DW 15L DW 18L		485	19.1	1321	52.0	584	23.0	3950	155.5	43	53	5000	11000	5000	11000	4.0	58	164		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

RADIAL INDUSTRIAL TYRES

- Made for Agro / Industrial applications.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tire life.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	kg	lbs	bar	psi		kmph	mph
340/80R-18 12.5L R-18 143 A8/B	MP-70	W 11	W 10	TL	345	13.8	1005	39.6	460	18.1	3025	119.1	34	43	2725	5995	2725	5995	4.0	58	143	B/50 kmph	B/30 mph
340/80R-20 12.5L R-20 144 A8/B		11	W 10 W 11		345	13.8	1050	41.3	480	18.9	3215	126.6	34	43	2800	6160	2800	6160	4.0	58	144		
380/75R-20 14.5L R-20 148 A8/B		W 12	W 11		384	15.1	1074	42.3	485	19.1	3250	128.0	34	43	3150	6930	3150	6930	4.0	58	148		
460/70R-24 17.5L R-24 159 A8/B	MP-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	41	51	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph
500/70R-24 19.5L R-24 164 A8/B		DW 16L	DW 15L DW 18L		485	19.1	1321	52.0	584	23.0	3950	155.5	43	53	5000	11000	5000	11000	4.0	58	164		

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%



SPEEDWAYS
TYRES

...Keeps You Moving



...Keeps You Moving

GLOBAL
PRESENCE
IN OVER



COUNTRIES WORLDWIDE

ISO 9001:2015

ISO/IEC 17025:2017

IATF 16949:2016



ECE-106R

DOT

BIS

Certificado N° / Certificate N°: C1 45152403

CERTIFICADO CONFORMIDAD PRODUCCIÓN
CONFORMITY PRODUCTION CERTIFICATE

El presente certificado acredita que: / The following certificate ensures that:

SPEEDWAYS RUBBER COMPANY
Suchi Pind By Pass, G.T. Road
144009, Jalandhar, PUNJAB (INDIA)

dispone de un sistema de gestión de calidad y de los procedimientos y planes de conformidad de la producción adecuados para garantizar el cumplimiento con los requisitos del. / Has a quality management system and the conformity of production procedures and plans in compliance with the requirements of:

Anexo 1 del acuerdo ECE/TRANS/505/Rev.3
Schedule 1 of the Agreement ECE/TRANS/505/Rev.3

Alcance: / Scope: Ver Anexo 1 / See Annex 1

El certificado se emite como consecuencia del expediente 45152403, correspondiente a la auditoría realizada el 26 de febrero de 2024, válido para los números de homologación concedidos por la Autoridad de Homologación Española. / The certificate is issued as a result of the 45152403 file, relevant to the audit carried out on the 26th of February 2024, valid for the approval numbers granted by the Spanish Approval Authority.

Fecha de emisión: / Issue Date: 17.04.2018 / 2018.04.17
Válido hasta: / Valid until: 17.04.2026 / 2026.04.17

CERTIFICADO
unidad de certificación del automóvil

D. José M^o Martínez-Mai Palafios
Director I+D

Elaborado en conformidad con el Reglamento (CE) nº 1831/2003 del Parlamento Europeo y del Consejo, de 22 de septiembre de 2003, relativo a la homologación de vehículos. / Prepared in accordance with Regulation (EC) No 1831/2003 of the European Parliament and of the Council, of 22 September 2003, relating to the approval of vehicles.

MF027450002V

NHTSA Manufacturer's Information Database (MID)

SPEEDWAYS RUBBER COMPANY

PLANT INFORMATION

Contact
Plant Name: SPEEDWAYS RUBBER COMPANY
Address: BYE PASS GT ROAD
JALANDHAR PUNJAB INDIA 144009
Contact Info: 91 181 242-1457 91 181 242-0031

MAIN OFFICE INFORMATION

Contact
Company Name
Address
Contact Info

Equipment Types

ID	Equipment Type	DOT Code	DOT Code Old
20102	Tires	TLH	LH

Contact NHTSA Manufacturer Helpdesk at midhelpdesk@nhtsa.gov or 1-888-385-3277

U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
1200 New Jersey Avenue, SE
Washington, DC 20590
1-888-327-4239
1-800-424-9153 (TTY)

भारतीय मानक मंडल
BUREAU OF INDIAN STANDARDS

उत्पादन संख्या: 181 242-1457
ATTACHMENT TO LICENCE NO. CMR-181489

उत्पादन संख्या / No. of the product	उत्पादन का पता / WITH THE ADDRESS	उत्पाद का नाम / NAME OF THE PRODUCT	उत्पाद संख्या / No. of the product
181 242-1457	Speedways Rubber Company Suchi Pind Road, G.T. Road Bye Pass, Jalandhar City, Punjab-144009	Automotive Tyres - Passenger cars for two and three-wheeler motor vehicles	IS 11027-2002

उत्पादन संख्या: 181 242-1457
ENHANCEMENT NO. 21 / 14729

यह उत्पादन संख्या केवल तभी उपयोग में लाई जा सकती है जब तक कि यह उत्पादक के पास हो। / This production number can only be used if the producer has it.

यह उत्पादन संख्या केवल तभी उपयोग में लाई जा सकती है जब तक कि यह उत्पादक के पास हो। / This production number can only be used if the producer has it.

उत्पादन संख्या: 181 242-1457














AGRICULTURE
TYRES

BIAS TRACTOR REAR TYRES (R-1)

- Specially designed for better traction, self cleaning and stability.
- Ideally suitable in all operating conditions.
- Superior tread.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED								
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph							
8.00-20	GRIPKING	8	7.0	TT	229	9.0	965	38.0	457	18.0	2845	112.0	27	34	920	2024	2.1	30	105	A6/30 kmph	A6/20 mph							
8.3-20		8	7.0		211	8.3	900	35.4	406	16.0	2704	106.5	22	27	825	1808	2.5	35	101									
9.5-20		8	7.0		241	9.5	955	37.6	432	17.0	2942	115.8	27	34	975	2145	2.8	41	107									
11.2-20		8 12	10.0		284	11.2	998	39.7	483	19.0	2997	118.0	33	41	1090	2398	2.4	35	111			33	41	1215	2675	2.8	40	115
8.3-22	GRIPKING	6	7.0	TT	211	8.3	950	37.4	457	18.0	2972	117.0	24	30	800	1760	2.8	41	100	A6/30 kmph	A6/20 mph							
8.3-22		8	7.0		241	9.5	991	39.3	457	18.0	2972	117.0	24	30	900	1980	3.1	45	104									
9.5-22		6	7.0		241	9.5	991	39.3	457	18.0	2972	117.0	24	30	900	1980	2.2	32	104			24	30	1060	2335	2.9	42	110
9.5-22		8	7.0		241	9.5	991	39.3	457	18.0	2972	117.0	24	30	1060	2335	2.9	42	110									
8.3-24	GRIPKING	6	7.0	TT	211	8.3	993	39.1	457	18.0	2921	115.0	26	32	800	1760	2.4	35	100	A6/30 kmph	A6/20 mph							
8.3-24		8	7.0		211	8.3	993	39.1	457	18.0	2921	115.0	26	32	925	2035	3.1	45	105									
9.5-24		8	7.0		241	9.5	1050	41.3	483	19.0	3099	122.0	26	32	1120	2464	2.9	41	112			31	39	1250	2750	2.4	35	116
11.2-24		8 12	10.0		284	11.2	1105	43.5	508	20.0	3251	128.0	31	39	1360	3000	2.8	41	119			31	39	1360	3000	2.8	41	119
12.4-24	GRIPKING	8	11.0	TT	315	12.4	1170	46.0	533	21.0	3404	134.0	29	36	1450	3190	2.3	33	121	A6/30 kmph	A6/20 mph							
12.4-24		12	11.0		315	12.4	1170	46.0	533	21.0	3404	134.0	29	36	1800	3960	3.5	50	128									
13.6-24		8	12.0		345	13.5	1210	47.6	559	22.0	3556	140.0	30	38	1550	3410	1.9	28	123			30	38	1900	4180	2.8	41	130
14.9-24		8 12	13.0		378	14.9	1265	49.8	584	23.0	3708	146.0	32	40	1800	3960	1.8	26	128			32	40	2180	4795	2.6	37	135
21.3-24	GRIPKING	12	18.0	TT/TL	540	21.3	1400	55.1	644	25.3	4221	166.1	43	54	3860	8492	2.2	32	155	A6/30 kmph	A6/20 mph							
21.3-24		16	18.0		540	21.3	1400	55.1	644	25.3	4221	166.1	43	54	4500	9900	2.8	40	160									
13.6-26		8	12.0		345	13.6	1260	49.6	584	23.0	3708	146.0	31	39	1700	3740	2.1	31	126			31	39	1850	4070	1.8	26	129
14.9-26		8 12	13.0		378	14.9	1315	51.7	610	24.0	3861	152.0	31	39	2240	4928	2.6	38	136			31	39	2240	4928	2.6	38	136
23.1-26	GRIPKING	12	20.0	TT/TL	587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	3650	8030	1.7	25	153	A6/30 kmph	A6/20 mph							
23.1-26		16	20.0		587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	4375	9625	2.3	33	159									
23.1-26		18	20.0		587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	4625	10175	2.6	38	161									
23.1-26		12	20.0		587	23.1	1585	62.4	720	28.3	4806	189.2	43	54	4625	10175	2.6	38	161									
11.2-28	GRIPKING	8	10.0	TT	284	11.2	1205	47.4	559	22.0	3531	139.0	33	41	1320	2904	2.4	34	118	A6/30 kmph	A6/20 mph							
11.2-28		12	10.0		284	11.2	1205	47.4	559	22.0	3531	139.0	33	41	1450	3190	2.5	36	121									
12.4-28		8	11.0		378	14.9	1265	49.8	584	23.0	3708	146.0	35	44	1550	3410	2.3	33	123			35	44	1950	4290	3.4	50	131
12.4-28		12	11.0		378	14.9	1265	49.8	584	23.0	3708	146.0	35	44	1950	4290	3.4	50	131									
13.6-28	GRIPKING	8	12.0	TT	378	14.9	1320	52.0	584	23.0	3861	152.0	37	46	1650	3630	2.0	29	125	A6/30 kmph	A6/20 mph							
13.6-28		12	12.0		378	14.9	1320	52.0	584	23.0	3861	152.0	37	46	2120	4664	2.9	41	134									
14.9-28		8	13.0		378	14.9	1365	53.7	635	25.0	4013	158.0	33	41	1900	4180	1.8	26	130			33	41	2300	5070	2.6	38	137
14.9-28		12	13.0		378	14.9	1365	53.7	635	25.0	4013	158.0	33	41	2300	5070	2.6	38	137									
16.9-28	GRIPKING	8	15.0	TT	429	16.9	1435	56.5	660	26.0	4216	166.0	36	45	2180	4796	1.8	25	135	A6/30 kmph	A6/20 mph							
16.9-28		12	15.0		429	16.9	1435	56.5	660	26.0	4216	166.0	36	47	2725	5995	2.4	35	143									
16.9-28		8	15.0		429	16.9	1435	56.5	660	26.0	4216	166.0	36	47	2725	5995	2.4	35	143									
16.9-28		12	15.0		429	16.9	1435	56.5	660	26.0	4216	166.0	36	47	2725	5995	2.4	35	143									
16.9-30	GRIPKING	8	15.0	TT	429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	2300	5060	1.7	24	137	A6/30 kmph	A6/20 mph							
16.9-30		12	15.0		429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	2725	5995	2.4	36	139									
16.9-30		14	15.0		429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	3000	6600	2.8	41	143									
16.9-30		8	15.0		429	16.9	1486	58.5	686	27.0	4369	172.0	40	50	3000	6600	2.8	41	143									
18.4-30	GRIPKING	8	16.0	TT	467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	2430	5345	1.4	20	139	A6/30 kmph	A6/20 mph							
18.4-30		10	16.0		467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	2900	6380	1.8	26	145									
18.4-30		14	16.0		467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	3450	7590	2.6	38	151									
18.4-30		8	16.0		467	18.4	1560	61.4	711	28.0	4547	179.0	36	45	3450	7590	2.6	38	151									
12.4-32	GRIPKING	8	11.0	TT	325	12.8	1359	53.5	635	25.0	3988	157.0	30	38	1600	3520	2.3	33	124	A6/30 kmph	A6/20 mph							
12.4-32		12	11.0		325	12.8	1359	53.5	635	25.0	3988	157.0	30	38	1900	4180	3.0	44	130									
12.4-32		8	11.0		325	12.8	1359	53.5	635	25.0	3988	157.0	30	38	1900	4180	3.0	44	130									
12.4-32		12	11.0		325	12.8	1359	53.5	635	25.0	3988	157.0	30	38	1900	4180	3.0	44	130									

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.9-34	GRIPKING	8	15.0	TT	430	16.9	1590	62.6	737	29.0	4648	183.0	44	55	2430	5346	1.7	25	139	A6/30 kmph	A6/20 mph
		14											44	55	3000	6600	2.8	41	146		
18.4-34		8	16.0		467	18.4	1660	65.3	762	30.0	4851	191.0	39	48	2650	5830	1.4	20	142		
		12											39	48	3000	6600	2.2	32	146		
20.8-34		14	18.0		528	20.8	1760	69.2	790	31.1	5156	203.0	39	48	3750	8250	2.4	35	154		
		18											35	44	3250	7150	1.4	20	149		
12.4-36	GRIPKING	8	11.0	TT	325	13.0	1465	58.0	696	28.0	4546	186.0	42	53	1700	3740	2.3	33	126	A6/30 kmph	A6/20 mph
		12											42	53	2120	4664	2.8	41	134		
13.6-36		8	12.0		345	13.6	1520	59.5	717	28.2	4647	183.0	34	42	1850	4070	2.0	29	129		
		10											34	42	2060	4530	2.2	32	133		
12.4-38		12	11.0		315	12.4	1511	59.5	716	28.2	4496	177.0	34	42	1750	3850	2.3	33	127		
		8											34	42	2120	4664	2.8	40	134		
13.6-38	GRIPKING	8	12.0	TT	345	13.6	1565	61.6	737	29.0	4597	181.0	37	46	1950	4290	2.0	28	131	A6/30 kmph	A6/20 mph
		12											37	46	2430	5360	3.0	44	139		
14.00-38		8	12.0		355	14.0	1570	61.8	737	29.0	4597	181.0	39	49	1950	4290	2.0	28	131		
		12											39	49	2430	5346	3.0	44	139		
14.9-38		8	13.0		378	15.0	1685	66.3	737	29.0	4597	181.0	41	51	2120	4664	2.4	35	134		
		12											41	51	2575	5665	3.0	43	141		
15.5-38	8	14.0	395	15.5	1585	62.4	737	29.0	4648	183.0	41	51	2060	4532	1.8	26	133				
	12										41	51	2575	5665	2.8	41	141				
16.9-38	GRIPKING	8	15.0	TT	429	16.9	1685	66.3	787	31.0	4953	195.0	35	44	2575	5665	1.8	26	141	A6/30 kmph	A6/20 mph
		14											35	44	3450	7590	2.4	35	151		
18.4-38		8	16.0		467	18.4	1770	69.6	813	32.0	5156	203.0	39	49	2725	5995	1.4	20	143		
		14											39	49	3650	8030	2.3	33	153		
20.8-38		8	18.0		528	20.8	1840	72.4	864	34.0	5385	212.0	41	51	3150	6930	1.3	19	148		
		12											41	51	4000	8800	2.0	29	156		
	14	41		51									4500	9900	2.4	35	160				
	28	41		51									5800	12760	4.3	62	169				







* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.

BIAS TRACTOR REAR TYRES (R-1)

- Deep tread and excellent tread wear and durability.
- Designed to deliver power to the ground.
- Design offers maximum cleaning and sidewall slip resistance.



GRIPKING HD







SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
12.4-24	GRIPKING HD	8	11.0	TT	315	12.4	1170	46.0	533	21.0	3404	134.0	30	38	1450	3190	2.3	33	121	A6/30 kmph	A6/20 mph
		12											30	38	1800	3960	3.5	50			
14.9-24		8	13.0	TT	378	14.9	1265	49.8	584	23.0	3708	146.0	32	40	1800	3960	1.8	26	128		
		12											32	40	2180	4795	2.6	37	135		
15.5/80-24		12	13.0	TL	394	15.5	1260	49.6	584	23.0	3708	146.0	40	50	2900	6380	3.0	43	145		
		16											40	50	3450	7590	4.0	58	151		

BIAS TRACTOR REAR TYRES (R-1)

- Unique lug design ensures excellent traction in both dry and wet soil conditions.
- Specially designed profile for better stability.



PK-318 HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
16.9-26	PK-318 HD	12	14.0	TT/TL	429	16.9	1385	54.5	635	25.0	4064	160.0	38	49	2500	5500	2.3	33	140	A6/30 kmph	A6/20 mph

* All product data contained in this publication are for information purposes only and may be modified at any time without prior notice. Speedways Rubber Company or any of its subsidiary companies does not undertake any responsibility or liability for undetected errors or misprints. All rights reserved. The materials and contents of this publication and the website are the exclusive property of Speedways Rubber Company and are protected by industrial and/or intellectual property laws. The user is not permitted to copy, reproduce, transfer, upload, make use of, publish or spread any contents, in whole or in part, on paper format, electronic format or otherwise without prior written consent by Speedways Rubber Company.





GRIPKING

